

# 屋内照明器具特性

品番 (品名) SLB15781+SLK22014+SLK290

光源 LLD2421LCB1 x1 500.0 lm


管理番号 K0193682 (0) DB1

BZ分類 BZ1/1.4/BZ2/4.5/BZ3

| 器具効率   |             | 9 7 %            | 反射率     | 天井      | 8 0 %                   |     |     |     | 7 0 % |     |     |     | 5 0 % |     |     |     | 3 0 % |     |     |     | 0 % |  |  |
|--------|-------------|------------------|---------|---------|-------------------------|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|-----|-----|--|--|
|        |             |                  |         | 壁       | 7 0                     | 5 0 | 3 0 | 1 0 | 7 0   | 5 0 | 3 0 | 1 0 | 7 0   | 5 0 | 3 0 | 1 0 | 7 0   | 5 0 | 3 0 | 1 0 |     |  |  |
| 上方光束   |             | 1 2 %            |         | 床       | 1 0 %                   |     |     |     | 1 0 % |     |     |     | 1 0 % |     |     |     | 1 0 % |     |     |     | 0 % |  |  |
| 下方光束   |             | 8 5 %            |         | 室指数     | 照明率 ( X 0 . 0 1 ) Z C M |     |     |     |       |     |     |     |       |     |     |     |       |     |     |     |     |  |  |
| 保守率    |             | 良                | 0 . 6 3 | 0 . 6   | 6 9                     | 6 1 | 5 6 | 5 3 | 6 8   | 6 0 | 5 6 | 5 2 | 6 5   | 5 9 | 5 5 | 5 2 | 6 2   | 5 7 | 5 4 | 5 1 | 4 9 |  |  |
|        |             | 中                | 0 . 6   | 0 . 8   | 7 6                     | 6 8 | 6 3 | 6 0 | 7 4   | 6 7 | 6 3 | 5 9 | 7 1   | 6 5 | 6 1 | 5 8 | 6 8   | 6 3 | 6 0 | 5 7 | 5 5 |  |  |
|        |             | 否                | 0 . 5 6 | 1 . 0   | 8 0                     | 7 3 | 6 8 | 6 5 | 7 8   | 7 2 | 6 8 | 6 4 | 7 5   | 7 0 | 6 6 | 6 3 | 7 2   | 6 7 | 6 4 | 6 1 | 5 9 |  |  |
| 下方投影面積 |             | c m <sup>2</sup> |         | 1 . 2 5 | 8 4                     | 7 8 | 7 3 | 6 9 | 8 2   | 7 6 | 7 2 | 6 9 | 7 8   | 7 4 | 7 0 | 6 7 | 7 5   | 7 1 | 6 8 | 6 5 | 6 2 |  |  |
|        |             |                  |         | 1 . 5   | 8 7                     | 8 1 | 7 7 | 7 3 | 8 5   | 7 9 | 7 5 | 7 2 | 8 1   | 7 6 | 7 3 | 7 0 | 7 7   | 7 3 | 7 1 | 6 8 | 6 5 |  |  |
| 等価発光面積 |             | c m <sup>2</sup> |         | 2 . 0   | 9 0                     | 8 5 | 8 1 | 7 8 | 8 8   | 8 4 | 8 0 | 7 7 | 8 4   | 8 0 | 7 7 | 7 5 | 8 0   | 7 7 | 7 5 | 7 2 | 6 8 |  |  |
|        |             |                  |         | 2 . 5   | 9 2                     | 8 8 | 8 5 | 8 2 | 9 0   | 8 6 | 8 3 | 8 0 | 8 6   | 8 3 | 8 0 | 7 8 | 8 2   | 7 9 | 7 7 | 7 5 | 7 1 |  |  |
| 収付高さ   | 器具間隔最大限     |                  | 3 . 0   | 9 4     | 9 0                     | 8 7 | 8 4 | 9 1 | 8 8   | 8 5 | 8 3 | 8 7 | 8 4   | 8 2 | 8 0 | 8 3 | 8 1   | 7 9 | 7 7 | 7 3 |     |  |  |
|        | 横方向 ( A )   | 縦方向 ( B )        |         | 9 6     | 9 3                     | 9 0 | 8 8 | 9 3 | 9 1   | 8 8 | 8 6 | 8 9 | 8 7   | 8 5 | 8 3 | 8 5 | 8 3   | 8 1 | 8 0 | 7 5 |     |  |  |
| H m    | 0 . 5 3 H m | 0 . 5 3 H m      | 4 . 0   | 9 7     | 9 4                     | 9 2 | 9 0 | 9 4 | 9 2   | 9 0 | 8 8 | 9 0 | 8 8   | 8 6 | 8 5 | 8 6 | 8 4   | 8 3 | 8 2 | 7 7 |     |  |  |
|        |             |                  | 5 . 0   | 9 8     | 9 6                     | 9 5 | 9 3 | 9 6 | 9 4   | 9 3 | 9 1 | 9 1 | 9 0   | 8 9 | 8 7 | 8 7 | 8 6   | 8 5 | 8 4 | 7 9 |     |  |  |
|        |             |                  | 7 . 0   | 9 9     | 9 8                     | 9 7 | 9 5 | 9 7 | 9 6   | 9 4 | 9 3 | 9 2 | 9 1   | 9 0 | 8 9 | 8 8 | 8 7   | 8 7 | 8 6 | 8 0 |     |  |  |
|        |             |                  | 1 0 . 0 |         |                         |     |     |     |       |     |     |     |       |     |     |     |       |     |     |     |     |  |  |

## 配光曲線

ランプ光束1000lm

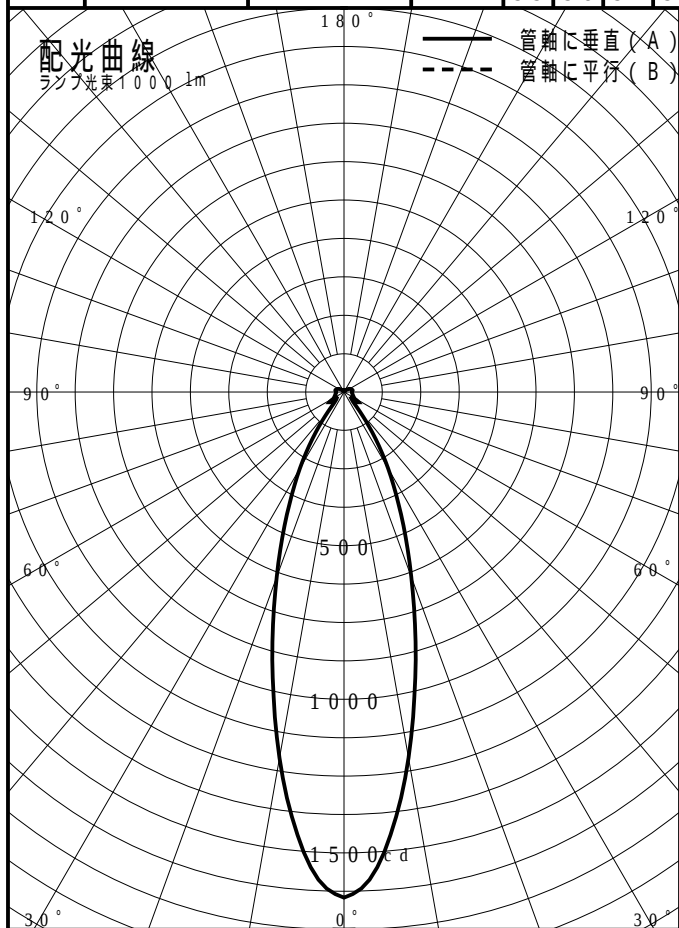

## 直射水平面照度

ランプ光束1000lm

