

屋内照明器具特性

品番 (品名) SLB15782 + SLK22002 + SLK290

光源 LLD3421LCB1 x1 700.0 lm


管理番号 K0193685 (0) DB1

BZ分類 BZ1/1.8 / BZ2/8.5 / BZ3

器具効率		97 %	反射率	天井壁	80 %				70 %				50 %				30 %				0 %		
					70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0 %		
上方光束		11 %		床	10 %				10 %				10 %				10 %				0 %		
下方光束		86 %		室指数	照明率 (X0.01)																		ZCM
保守率		良	0.63	0.6	70	62	57	54	69	61	57	53	66	60	56	53	64	58	55	52	50		
		中	0.6	0.8	77	69	65	61	75	68	64	60	72	66	62	59	69	64	61	58	56		
		否	0.56	1.0	81	74	70	66	79	73	69	65	76	71	67	64	73	68	65	63	60		
下方投影面積		cm ²		1.25	85	79	74	71	83	77	73	70	79	75	71	68	76	72	69	67	63		
				1.5	87	82	77	74	85	80	76	73	81	77	74	71	78	74	72	69	66		
等価発光面積		cm ²		2.0	91	86	82	79	89	84	81	78	84	81	78	76	81	78	75	73	70		
				2.5	93	89	85	82	91	87	84	81	86	83	81	79	82	80	78	76	72		
取付高さ	器具間隔最大限			3.0	94	91	88	85	92	89	86	84	88	85	83	81	84	82	80	78	74		
H _m	0.54H _m	0.54H _m		4.0	96	93	91	88	94	91	89	87	89	87	85	84	85	84	82	81	76		
				5.0	97	95	93	91	95	93	91	89	91	89	87	86	86	85	84	83	78		
				7.0	99	97	95	94	96	95	93	92	92	91	89	88	88	87	86	85	79		
				10.0	100	98	97	96	97	96	95	94	93	92	91	90	89	88	87	86	81		

配光曲線

ランプ光束1000lm

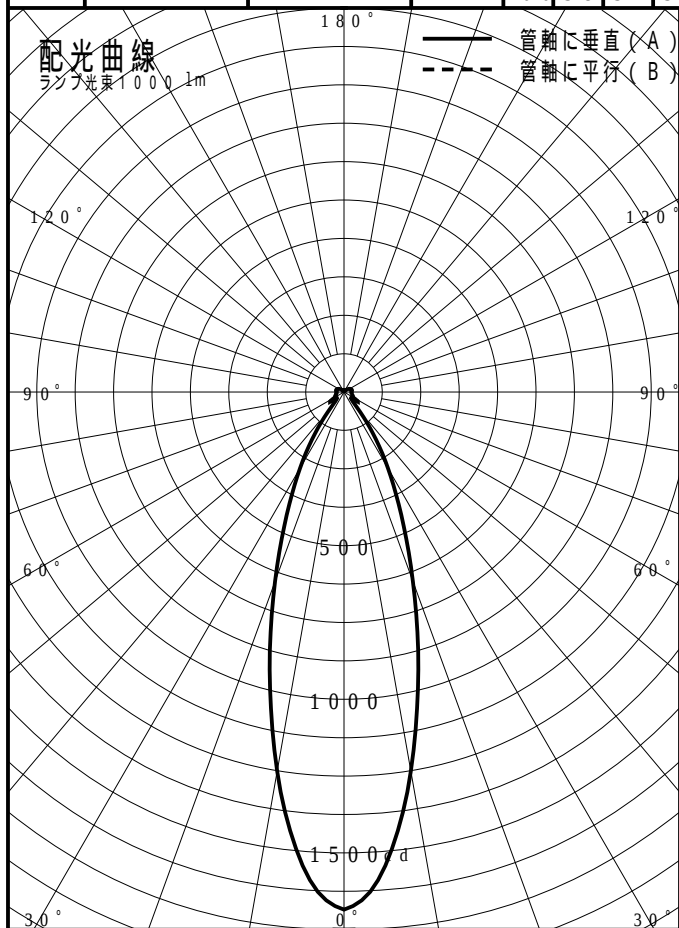

直射水平面照度

ランプ光束1000lm

