

屋内照明器具特性

品番 (品名) SLB15782 + SLK22006 + SLK290

光源 LLD3421LCB1 ×1 700.0 l m


管理番号 K0193691 (0) DB 1

B Z 分類 BZ1 / 0.9 / BZ2 / 3.5 / BZ3

器具効率		9 2 %	反 射 率	大 井	8 0 %				7 0 %				5 0 %				3 0 %				0 %	
				壁	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	0 %	
				床	1 0 %				1 0 %				1 0 %				1 0 %				0 %	
上方光束		8 %	室指数	照 明 率 (X 0 . 0 1)																		Z C M
下方光束		8 4 %																				
保守率		良	0 . 6 3	0 . 6	6 6	5 8	5 3	4 9	6 4	5 7	5 3	4 9	6 2	5 6	5 2	4 9	6 0	5 5	5 1	4 8	4 6	
		中	0 . 6	0 . 8	7 2	6 5	6 0	5 6	7 1	6 4	5 9	5 6	6 8	6 2	5 8	5 5	6 5	6 1	5 7	5 4	5 2	
		否	0 . 5 6	1 . 0	7 7	7 0	6 5	6 1	7 5	6 9	6 4	6 1	7 2	6 7	6 3	6 0	6 9	6 5	6 1	5 9	5 6	
下方投影面積		c m ²	1 . 2 5	8 0	7 4	6 9	6 6	7 8	7 3	6 9	6 5	7 5	7 0	6 7	6 4	7 2	6 8	6 5	6 3	6 0		
			1 . 5	8 3	7 7	7 3	6 9	8 1	7 6	7 2	6 9	7 8	7 3	7 0	6 7	7 4	7 1	6 8	6 6	6 3		
等価発光面積		c m ²	2 . 0	8 6	8 1	7 8	7 4	8 4	8 0	7 6	7 3	8 1	7 7	7 4	7 2	7 7	7 4	7 2	7 0	6 6		
			2 . 5	8 8	8 4	8 1	7 8	8 6	8 3	7 9	7 7	8 3	8 0	7 7	7 5	7 9	7 7	7 5	7 3	6 9		
取付	器具間隔最大限		3 . 0	9 0	8 6	8 3	8 0	8 8	8 5	8 2	7 9	8 4	8 1	7 9	7 7	8 1	7 8	7 6	7 5	7 1		
高さ	横方向 (A)	縦方向 (B)	4 . 0	9 2	8 9	8 6	8 4	9 0	8 7	8 5	8 2	8 6	8 4	8 2	8 0	8 2	8 1	7 9	7 7	7 3		
H m	0 . 4 6 H m	0 . 4 8 H m	5 . 0	9 3	9 0	8 8	8 6	9 1	8 9	8 7	8 5	8 7	8 5	8 3	8 2	8 3	8 2	8 1	7 9	7 5		
			7 . 0	9 4	9 2	9 0	8 9	9 2	9 0	8 9	8 7	8 8	8 7	8 6	8 4	8 5	8 4	8 2	8 1	7 7		
			1 0 . 0	9 5	9 4	9 2	9 1	9 3	9 2	9 1	8 9	8 9	8 8	8 7	8 6	8 6	8 5	8 4	8 3	7 9		

配光曲線

ランプ光束1000lm

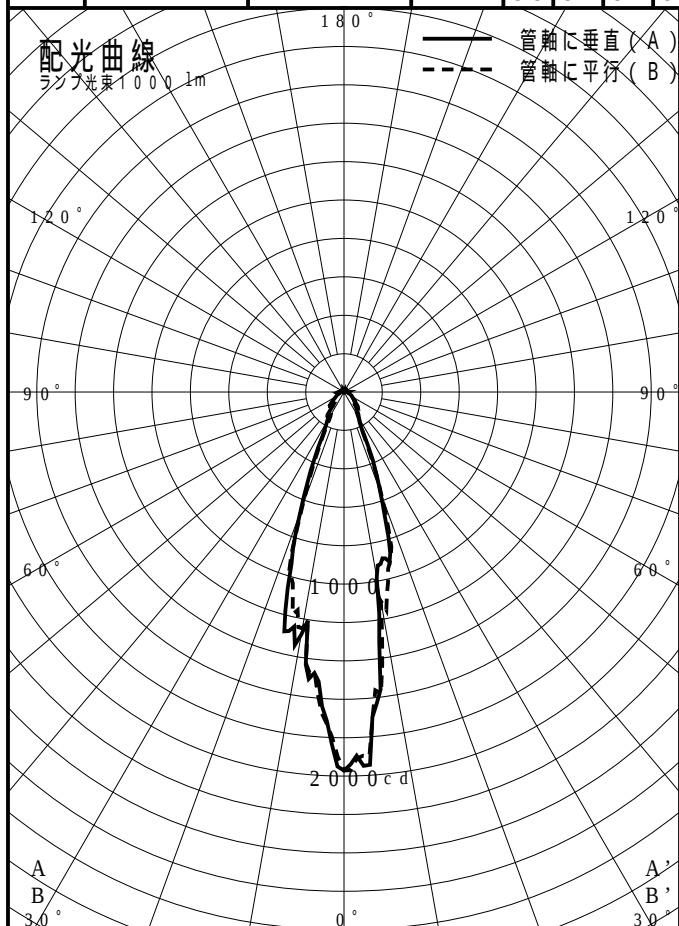

直射水平面照度

ランプ光束1000lm

