

屋内照明器具特性

品番 (品名) S L B 1 5 7 8 2 + S L K 2 2 0 1 4 + S L K 2 9 0


光源 L L D 3 4 2 1 L C B 1 × 1 7 0 0 . 0 l m

管理番号 K 0 1 9 3 6 8 5 (0) D B 1

B Z 分類 B Z 1 / 1 . 8 / B Z 2 / 8 . 5 / B Z 3

器具効率		97 %	反射率	天井	80 %				70 %				50 %				30 %				0 %	
				壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0 %	
				床	10 %				10 %				10 %				10 %				0 %	
上方光束		11 %	室指数	照明率 (X 0 . 0 1)																		Z C M
下方光束		86 %																				
保守率		良	0.63	0.6	70	62	57	54	69	61	57	53	66	60	56	53	64	58	55	52	50	
		中	0.6	0.8	77	69	65	61	75	68	64	60	72	66	62	59	69	64	61	58	56	
		否	0.56	1.0	81	74	70	66	79	73	69	65	76	71	67	64	73	68	65	63	60	
下方投影面積		c m ²	1.25	85	79	74	71	83	77	73	70	79	75	71	68	76	72	69	67	63		
			1.5	87	82	77	74	85	80	76	73	81	77	74	71	78	74	72	69	66		
等価発光面積		c m ²	2.0	91	86	82	79	89	84	81	78	84	81	78	76	81	78	75	73	70		
			2.5	93	89	85	82	91	87	84	81	86	83	81	79	82	80	78	76	72		
取付高さ	器具間隔最大限		3.0	94	91	88	85	92	89	86	84	88	85	83	81	84	82	80	78	74		
	横方向 (A)	縦方向 (B)																				
H m	0.54 H m	0.54 H m	4.0	96	93	91	88	94	91	89	87	89	87	85	84	85	84	82	81	76		
			5.0	97	95	93	91	95	93	91	89	91	89	87	86	86	85	84	83	78		
			7.0	99	97	95	94	96	95	93	92	92	91	89	88	88	87	86	85	79		
			10.0	100	98	97	96	97	96	95	94	93	92	91	90	89	88	87	86	81		

配光曲線
ランプ光束1000lm

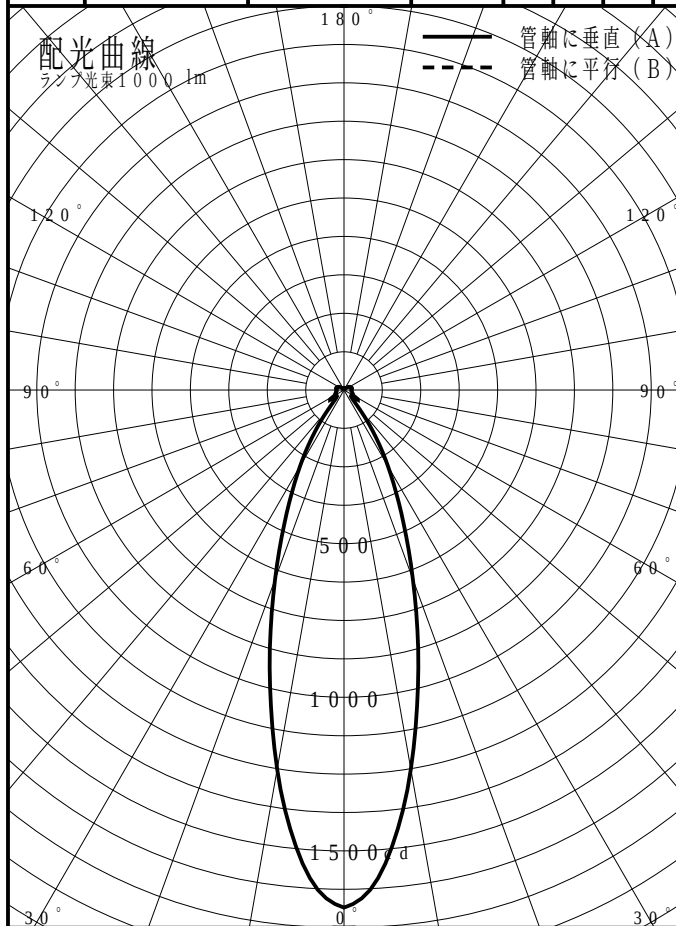

直射水平面照度
ランプ光束1000lm

