

屋内照明器具特性

品番 (品名) S L B 1 5 7 8 2 + S L K 2 2 0 1 4 + S L K 2 9 0

光源 L L D 2 4 2 1 L C B 1 × 1 5 0 0 . 0 l m


管理番号 K 0 1 9 3 6 8 2 (0) D B 1

B Z 分類 B Z 1 / 1 . 4 / B Z 2 / 4 . 5 / B Z 3

器具効率		9 7 %	反射率	天井	8 0 %				7 0 %				5 0 %				3 0 %				0 %			
				壁	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	0 %			
				床	1 0 %				1 0 %				1 0 %				1 0 %				0 %			
上方光束		1 2 %	室指数	照明率 (X 0 . 0 1)																			Z C M	
下方光束		8 5 %																						
保守率		良 中 否	0 . 6 3	0 . 6	6 9	6 1	5 6	5 3	6 8	6 0	5 6	5 2	6 5	5 9	5 5	5 2	6 2	5 7	5 4	5 1	4 9			
			0 . 6	0 . 8	7 6	6 8	6 3	6 0	7 4	6 7	6 3	5 9	7 1	6 5	6 1	5 8	6 8	6 3	6 0	5 7	5 5			
			0 . 5 6	1 . 0	8 0	7 3	6 8	6 5	7 8	7 2	6 8	6 4	7 5	7 0	6 6	6 3	7 2	6 7	6 4	6 1	5 9			
				1 . 2 5	8 4	7 8	7 3	6 9	8 2	7 6	7 2	6 9	7 8	7 4	7 0	6 7	7 5	7 1	6 8	6 5	6 2			
下方投影面積		c m ²	1 . 5	8 7	8 1	7 7	7 3	8 5	7 9	7 5	7 2	8 1	7 6	7 3	7 0	7 7	7 3	7 1	6 8	6 5				
等価発光面積			c m ²	2 . 0	9 0	8 5	8 1	7 8	8 8	8 4	8 0	7 7	8 4	8 0	7 7	7 5	8 0	7 7	7 5	7 2	6 8			
取付高さ	器具間隔最大限		2 . 5	9 2	8 8	8 5	8 2	9 0	8 6	8 3	8 0	8 6	8 3	8 0	7 8	8 2	7 9	7 7	7 5	7 1				
	横方向 (A)	縦方向 (B)	3 . 0	9 4	9 0	8 7	8 4	9 1	8 8	8 5	8 3	8 7	8 4	8 2	8 0	8 3	8 1	7 9	7 7	7 3				
H m	0 . 5 3 H m	0 . 5 3 H m	4 . 0	9 6	9 3	9 0	8 8	9 3	9 1	8 8	8 6	8 9	8 7	8 5	8 3	8 5	8 3	8 1	8 0	7 5				
			5 . 0	9 7	9 4	9 2	9 0	9 4	9 2	9 0	8 8	9 0	8 8	8 6	8 5	8 6	8 4	8 3	8 2	7 7				
			7 . 0	9 8	9 6	9 5	9 3	9 6	9 4	9 3	9 1	9 1	9 0	8 9	8 7	8 7	8 6	8 5	8 4	7 9				
			1 0 . 0	9 9	9 8	9 7	9 5	9 7	9 6	9 4	9 3	9 2	9 1	9 0	8 9	8 8	8 7	8 7	8 6	8 0				

配光曲線

ランプ光束 1 0 0 0 l m

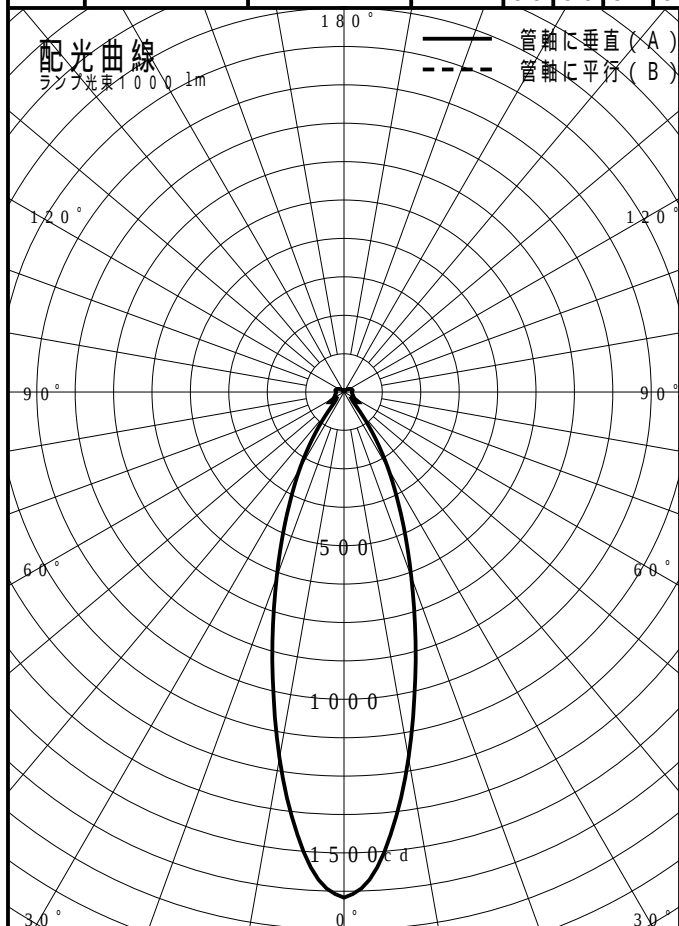

直射水平面照度

ランプ光束 1 0 0 0 l m

