

# 屋内照明器具特性

品番 (品名) SLB15783 + SLK22000 + SLK290

光源 LLD2411LCB1 x1 500.0 lm


管理番号 K0193681 (0) DB1

BZ分類 BZ1 / 4.5 / BZ2

| 器具効率   |          | 99 %             | 反射率      | 天井   | 80 %          |     |     |    | 70 % |     |    |    | 50 % |    |    |    | 30 % |    |    |    | 0 % |  |     |
|--------|----------|------------------|----------|------|---------------|-----|-----|----|------|-----|----|----|------|----|----|----|------|----|----|----|-----|--|-----|
|        |          |                  |          | 壁    | 70            | 50  | 30  | 10 | 70   | 50  | 30 | 10 | 70   | 50 | 30 | 10 | 70   | 50 | 30 | 10 | 0 % |  |     |
| 上方光束   |          | 7 %              |          | 床    | 10 %          |     |     |    | 10 % |     |    |    | 10 % |    |    |    | 10 % |    |    |    | 0 % |  |     |
| 下方光束   |          | 92 %             |          | 室指数  | 照明率 ( X0.01 ) |     |     |    |      |     |    |    |      |    |    |    |      |    |    |    |     |  | ZCM |
| 保守率    |          | 良                | 0.63     | 0.6  | 74            | 67  | 62  | 59 | 73   | 66  | 62 | 59 | 71   | 65 | 61 | 58 | 69   | 64 | 60 | 58 | 56  |  |     |
|        |          | 中                | 0.6      | 0.8  | 81            | 75  | 70  | 66 | 80   | 74  | 69 | 66 | 77   | 72 | 68 | 65 | 75   | 71 | 67 | 65 | 63  |  |     |
|        |          | 否                | 0.56     | 1.0  | 86            | 79  | 75  | 72 | 84   | 78  | 74 | 71 | 81   | 77 | 73 | 70 | 79   | 75 | 72 | 69 | 67  |  |     |
| 下方投影面積 |          | c m <sup>2</sup> |          | 1.25 | 89            | 84  | 80  | 76 | 88   | 83  | 79 | 76 | 85   | 80 | 77 | 74 | 82   | 78 | 76 | 73 | 71  |  |     |
|        |          |                  |          | 1.5  | 92            | 87  | 83  | 80 | 90   | 85  | 82 | 79 | 87   | 83 | 80 | 78 | 84   | 81 | 78 | 76 | 73  |  |     |
| 等価発光面積 |          | c m <sup>2</sup> |          | 2.0  | 95            | 91  | 87  | 84 | 93   | 89  | 86 | 84 | 90   | 87 | 84 | 82 | 87   | 84 | 82 | 80 | 77  |  |     |
|        |          |                  |          | 2.5  | 97            | 93  | 90  | 88 | 95   | 92  | 89 | 87 | 92   | 89 | 87 | 85 | 88   | 86 | 84 | 83 | 79  |  |     |
| 取付高さ   | 器具間隔最大限  |                  |          | 3.0  | 98            | 95  | 92  | 90 | 96   | 93  | 91 | 89 | 93   | 91 | 88 | 87 | 90   | 88 | 86 | 85 | 81  |  |     |
| H m    | 0.74 H m |                  | 0.74 H m | 4.0  | 100           | 97  | 95  | 93 | 98   | 96  | 94 | 92 | 94   | 93 | 91 | 89 | 91   | 90 | 88 | 87 | 83  |  |     |
|        |          |                  |          | 5.0  | 101           | 99  | 97  | 95 | 99   | 97  | 95 | 94 | 95   | 94 | 92 | 91 | 92   | 91 | 90 | 89 | 85  |  |     |
|        |          |                  |          | 7.0  | 102           | 100 | 99  | 97 | 100  | 99  | 97 | 96 | 96   | 95 | 94 | 93 | 93   | 92 | 91 | 90 | 86  |  |     |
|        |          |                  |          | 10.0 | 103           | 102 | 101 | 99 | 101  | 100 | 99 | 98 | 97   | 96 | 96 | 95 | 94   | 93 | 93 | 92 | 87  |  |     |

## 配光曲線

ランプ光束1000lm

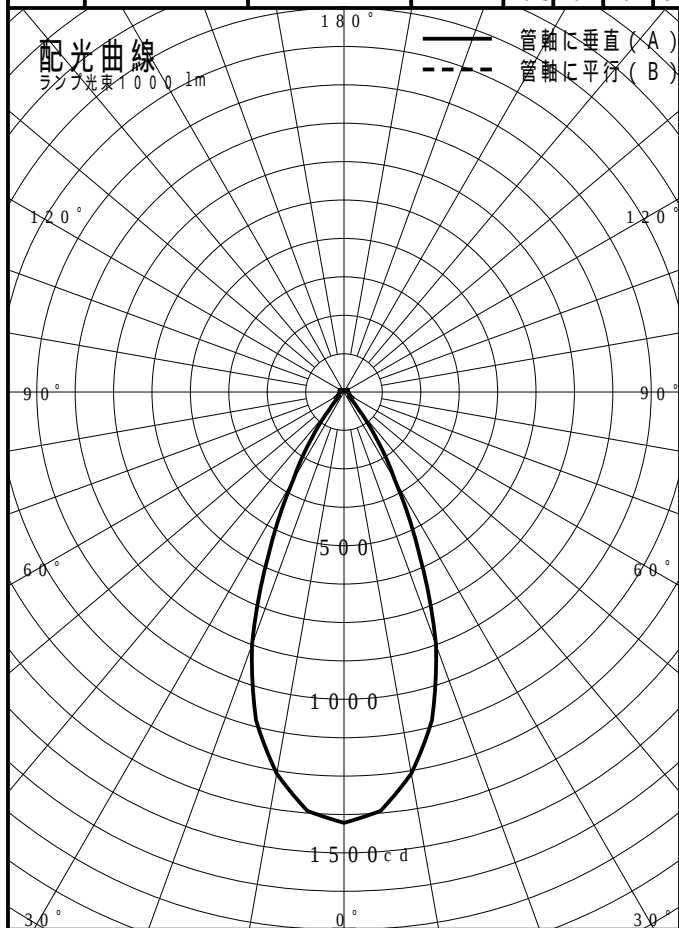

## 直射水平面照度

ランプ光束1000lm

