

屋内照明器具特性

品番 (品名) S L B 1 5 7 8 3 + S L K 2 2 0 0 1 + S L K 2 9 0

光源 L L D 2 4 1 1 L C B 1 × 1 5 0 0 . 0 l m


管理番号 K 0 1 9 3 6 8 1 (0) D B 1

B Z 分類 B Z 1 / 4 . 5 / B Z 2

器具効率		99 %	反射率	天井	80 %				70 %				50 %				30 %				0 %	
				壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0 %	
				床	10 %				10 %				10 %				10 %				0 %	
上方光束		7 %	室指数	照明率 (X0.01)																		Z C M
下方光束		92 %																				
保守率		良	0.63	0.6	74	67	62	59	73	66	62	59	71	65	61	58	69	64	60	58	56	
		中	0.6	0.8	81	75	70	66	80	74	69	66	77	72	68	65	75	71	67	65	63	
		否	0.56	1.0	86	79	75	72	84	78	74	71	81	77	73	70	79	75	72	69	67	
				1.25	89	84	80	76	88	83	79	76	85	80	77	74	82	78	76	73	71	
下方投影面積		c m ²		1.5	92	87	83	80	90	85	82	79	87	83	80	78	84	81	78	76	73	
等価発光面積		c m ²		2.0	95	91	87	84	93	89	86	84	90	87	84	82	87	84	82	80	77	
取付	器具間隔最大限			2.5	97	93	90	88	95	92	89	87	92	89	87	85	88	86	84	83	79	
高さ	横方向 (A)		縦方向 (B)	3.0	98	95	92	90	96	93	91	89	93	91	88	87	90	88	86	85	81	
H m	0.74 H m	0.74 H m		4.0	100	97	95	93	98	96	94	92	94	93	91	89	91	90	88	87	83	
				5.0	101	99	97	95	99	97	95	94	95	94	92	91	92	91	90	89	85	
				7.0	102	100	99	97	100	99	97	96	96	95	94	93	93	92	91	90	86	
				10.0	103	102	101	99	101	100	99	98	97	96	96	95	94	93	93	92	87	

配光曲線

ランプ光束1000lm

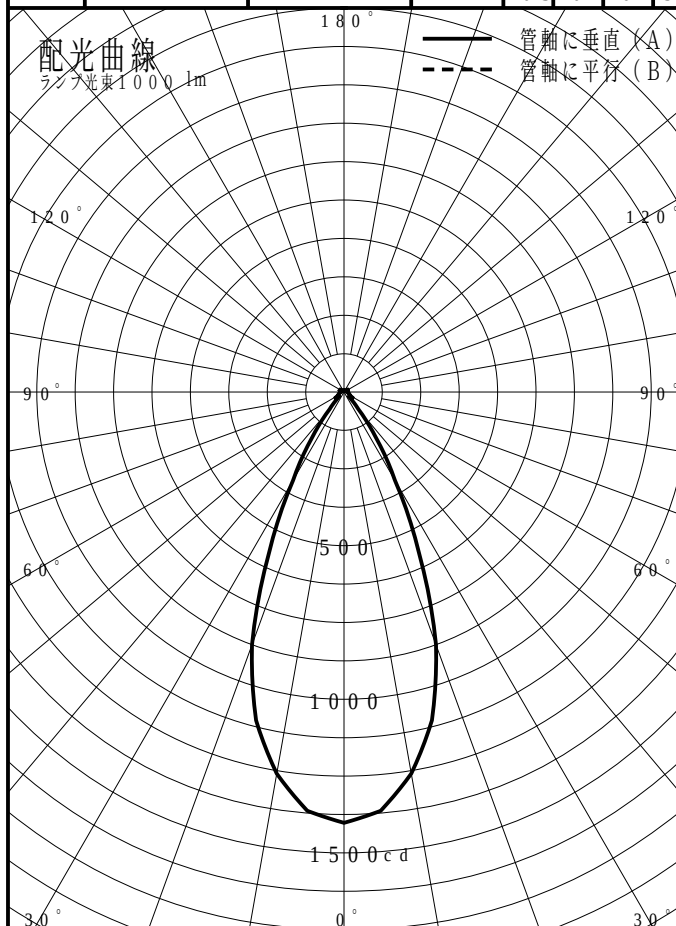

直射水平面照度

ランプ光束1000lm

