

屋内照明器具特性

品番 (品名) SLB15783 + SLK22001 + SLK290

光源 LLD2421LCB1 × 1 500.0 l m


管理番号 K0193682 (0) DB 1

B Z 分類 BZ1 / 1.4 / BZ2 / 4.5 / BZ3

器具効率		97 %	反射率	天井	80 %				70 %				50 %				30 %				0 %	
				壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0 %	
				床	10 %				10 %				10 %				10 %				0 %	
上方光束		12 %	室指数	照明率 (X0.01)																		Z C M
下方光束		85 %																				
保守率		良	0.63	0.6	69	61	56	53	68	60	56	52	65	59	55	52	62	57	54	51	49	
		中	0.6	0.8	76	68	63	60	74	67	63	59	71	65	61	58	68	63	60	57	55	
		否	0.56	1.0	80	73	68	65	78	72	68	64	75	70	66	63	72	67	64	61	59	
下方投影面積		c m ²	1.25	84	78	73	69	82	76	72	69	78	74	70	67	75	71	68	65	62		
			1.5	87	81	77	73	85	79	75	72	81	76	73	70	77	73	71	68	65		
等価発光面積		c m ²	2.0	90	85	81	78	88	84	80	77	84	80	77	75	80	77	75	72	68		
取付	器具間隔最大限		2.5	92	88	85	82	90	86	83	80	86	83	80	78	82	79	77	75	71		
高さ	横方向 (A)	縦方向 (B)	3.0	94	90	87	84	91	88	85	83	87	84	82	80	83	81	79	77	73		
H m	0.53 H m	0.53 H m	4.0	96	93	90	88	93	91	88	86	89	87	85	83	85	83	81	80	75		
			5.0	97	94	92	90	94	92	90	88	90	88	86	85	86	84	83	82	77		
			7.0	98	96	95	93	96	94	93	91	91	90	89	87	87	86	85	84	79		
			10.0	99	98	97	95	97	96	94	93	92	91	90	89	88	87	87	86	80		

配光曲線

ランプ光束1000lm

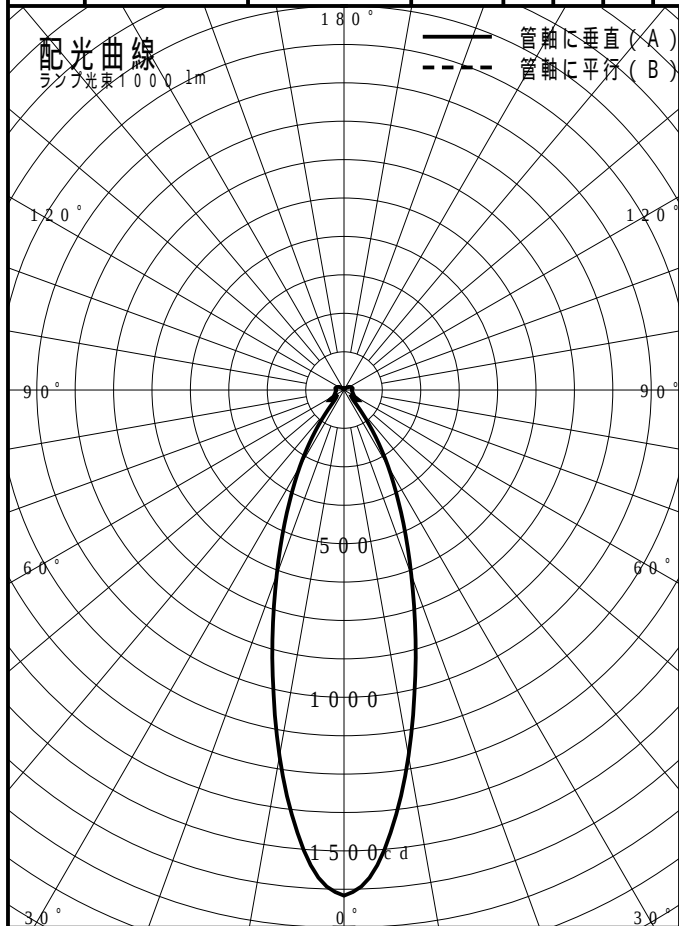

直射水平面照度

ランプ光束1000lm

