

屋内照明器具特性

品番 (品名) S L B 1 5 7 8 3 + S L K 2 2 0 1 0

光源 L L D 3 4 1 1 L C B 1 × 1 7 0 0 . 0 l m


管理番号 K 0 1 9 2 9 9 6 (0) D B 1

B Z 分類 B Z 1

器具効率		98 %	反射率	天井	80 %				70 %				50 %				30 %				0 %			
				壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0 %			
上方光束		0 %		床	10 %				10 %				10 %				10 %				0 %			
下方光束		98 %		室指数	照明率 (X0.01)																			Z C M
保守率			良 中 否	0.67	0.6	88	83	81	79	87	83	80	78	86	83	80	78	85	82	80	78	77		
				0.63	0.8	93	88	86	84	92	88	86	84	91	87	85	83	89	87	85	83	82		
				0.56	1.0	95	92	89	87	95	91	89	87	93	90	88	87	92	90	88	86	85		
下方投影面積		c m ²		1.25	97	94	92	90	97	94	92	90	95	93	91	89	94	92	90	89	88			
				1.5	99	96	94	92	98	95	93	92	96	94	93	91	95	93	92	91	89			
等価発光面積		c m ²		2.0	101	98	97	95	100	98	96	95	98	96	95	94	97	95	94	93	91			
取付高さ	器具間隔最大限			2.5	102	100	98	97	101	99	98	96	99	98	96	95	97	96	95	94	93			
	横方向 (A)	縦方向 (B)		3.0	103	101	99	98	102	100	99	98	100	98	97	96	98	97	96	95	93			
H m	0.76 H m	0.76 H m		4.0	103	102	101	100	102	101	100	99	100	100	99	98	99	98	97	97	94			
				5.0	104	103	102	101	103	102	101	100	101	100	99	99	99	98	98	97	95			
				7.0	105	104	103	102	104	103	102	101	102	101	100	100	100	99	99	98	96			
				10.0	105	105	104	104	104	104	103	103	102	102	101	101	100	100	99	99	96			

配光曲線

ランプ光束 1000lm

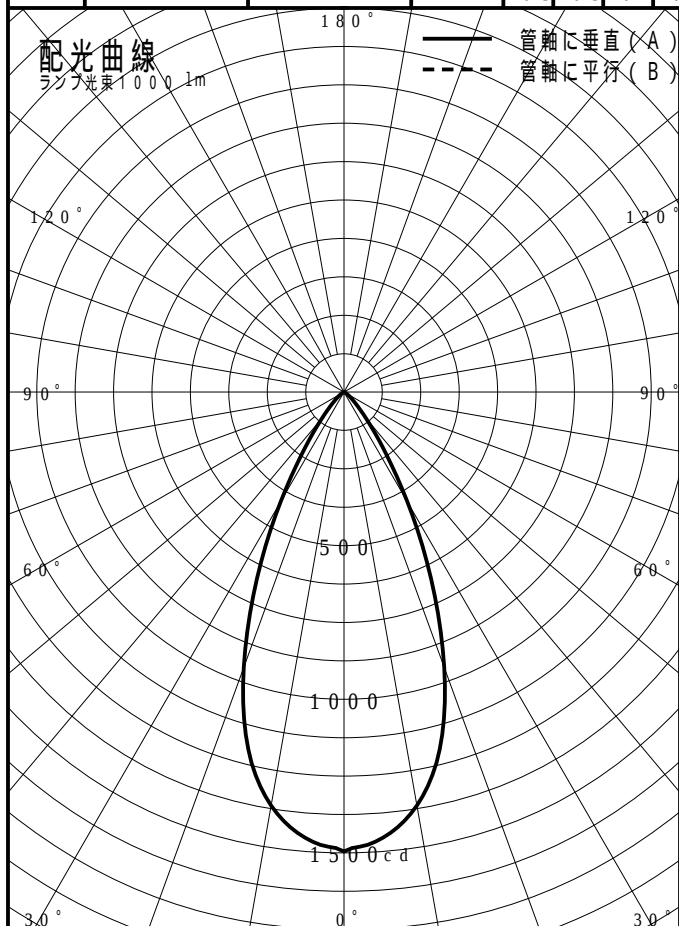

直射水平面照度

ランプ光束 1000lm

