

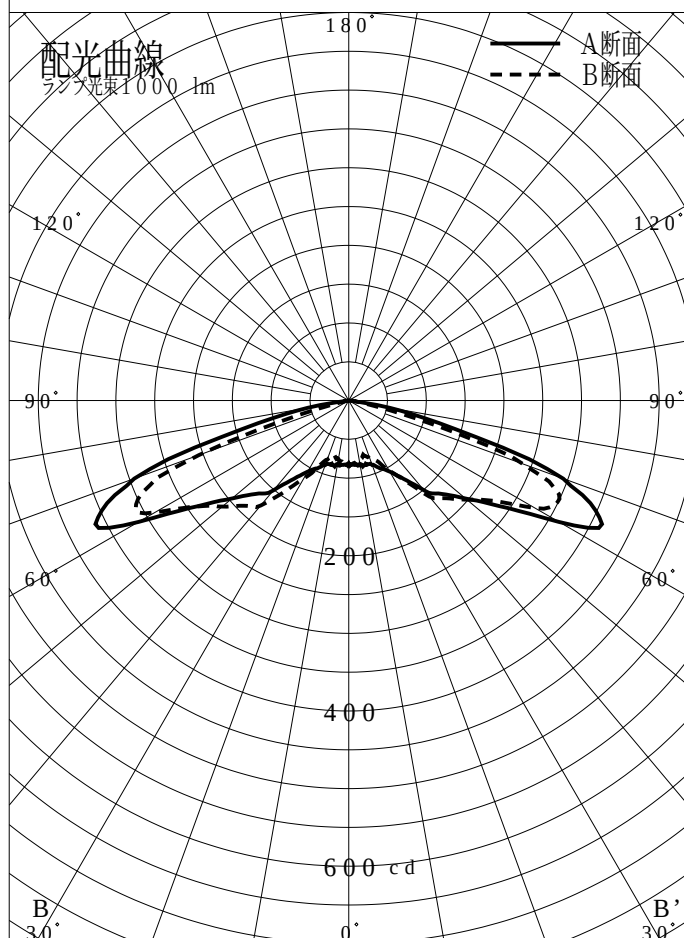


非常用照明器具特性

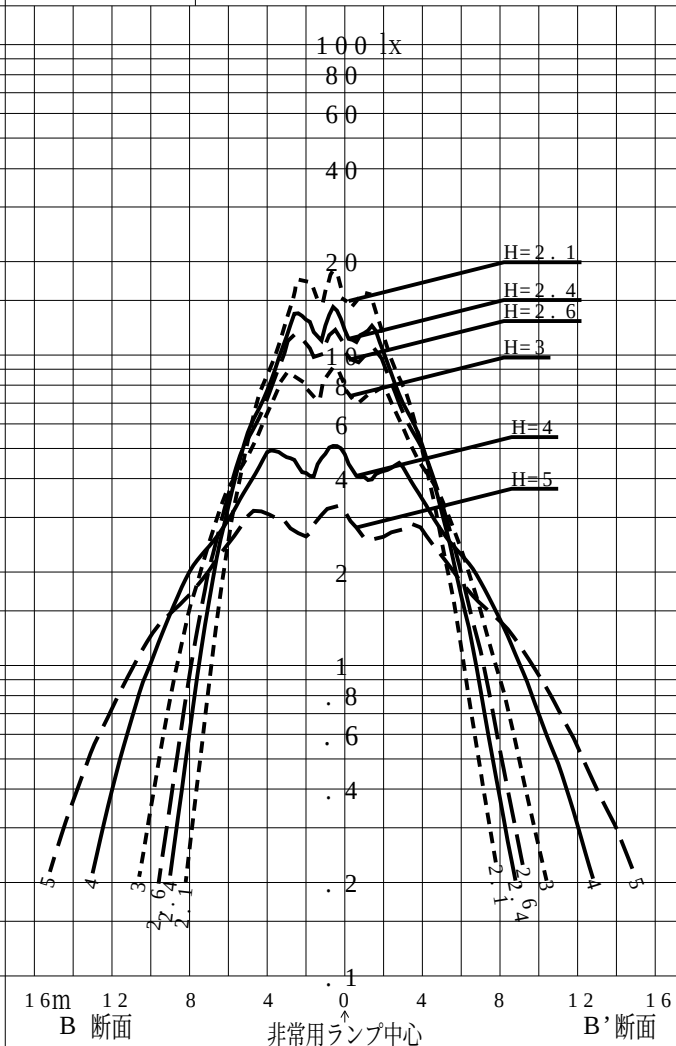

品番	XL G4 6 1 P G N J		
名称			
光源	LED5 0 0 0 / 9 8 / 6 6 5		
管理番号	K0 1 7 3 5 3 1 (0) DR1		
光束	6 6 5lm x 1 . 0 0		
保守率	0 . 8 8		
適用品番	設計照度Eを得るための読取照度		
	E = 2 . 0	E = 1 . 0	E = 0 . 5
XLG461PGNJ	3 . 4	1 . 7	0 . 9
備考	非常点灯時の照度 (3 0 分後)		

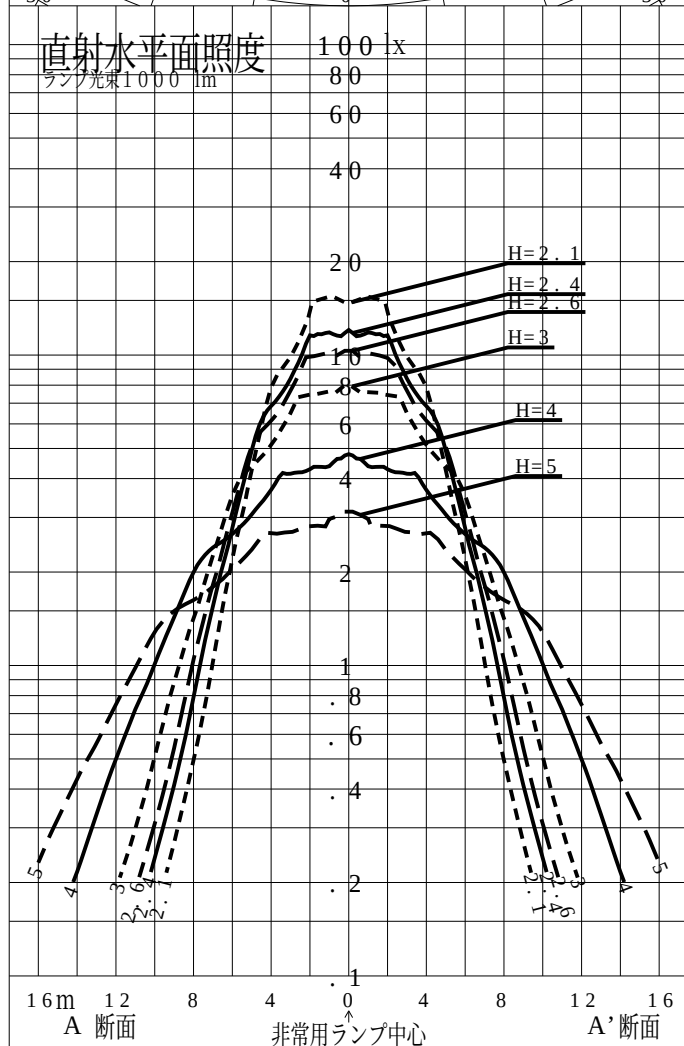

品番	XL G4 6 1 P G N J				
名称					
光源	L E D 5 0 0 0 / 9 8 / 6 6 5				
管理番号	K 0 1 7 3 5 3 1 (0) D R 1				
光束	6 6 5 . 0 l m * 1 . 0 0			備考	非常点灯時の照度 (3 0 分後)
保守率	0 . 8 8				

非常灯配置表

器具取付高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単体配置	A1	5.3	5.5	5.6	5.7	5.8	5.8	5.9	6.0	6.1	6.1	6.1	6.1	6.0	5.8	5.4	5.2
	B1	5.6	5.7	5.8	5.9	6.0	6.1	6.2	6.2	6.3	6.3	6.3	6.2	6.1	6.0	5.9	5.8
直線配置	B' 1	4.6	4.7	4.8	4.9	4.9	5.0	5.0	5.0	5.0	5.0	5.0	4.9	4.8	4.6	4.5	4.4
	A2	12.4	12.7	13.0	13.3	13.6	13.9	14.1	14.3	14.6	14.9	15.1	15.3	15.5	15.7	15.9	16.1
	B2	11.8	12.1	12.5	12.8	13.1	13.4	13.7	13.9	14.2	14.4	14.6	14.8	15.0	15.1	15.2	15.4
四角配置	A4	11.0	11.2	11.4	11.7	12.0	12.2	12.3	12.5	12.6	12.9	13.0	13.1	13.4	13.6	13.8	14.0
	B4	10.4	10.7	11.0	11.2	11.4	11.7	12.0	12.2	12.5	12.6	12.9	13.2	13.3	13.4	13.6	13.8
壁からの距離 (最大)	A0	3.5	3.5	3.5	3.6	3.7	3.8	3.6	3.7	3.6	3.7	3.6	3.6	3.6	3.6	3.5	3.5
	B0	2.6	2.8	2.8	2.8	2.9	2.9	3.1	3.1	3.2	3.2	3.3	3.4	3.3	3.3	3.4	3.4

器具取付高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5							
単体配置	A1	4.9	4.8	4.6	4.4	4.3	4.1	4.0	----	----							
	B1	5.7	5.6	5.5	5.5	5.4	5.3	5.2	----	----							
直線配置	B' 1	4.3	4.2	4.1	4.1	4.0	3.8	3.7	----	----							
	A2	16.3	16.4	16.6	16.6	16.5	16.3	16.2	16.1	15.4							
	B2	15.5	15.6	15.7	15.7	15.7	15.7	15.6	15.6	15.1							
四角配置	A4	14.2	14.2	14.5	14.6	14.8	15.0	15.2	15.3	15.4							
	B4	13.9	14.2	14.2	14.5	14.6	14.7	14.8	14.9	15.1							
壁からの距離 (最大)	A0	3.5	3.3	3.4	3.3	3.2	3.3	3.1	1.0	1.0							
	B0	3.4	3.4	3.3	3.4	3.4	3.2	3.2	1.0	1.0							

器具取付高さ (m)																	
単体配置																	
直線配置																	
四角配置																	
壁からの距離 (最大)																	