


非常用照明器具特性


配光曲線

ランプ光束1000lm

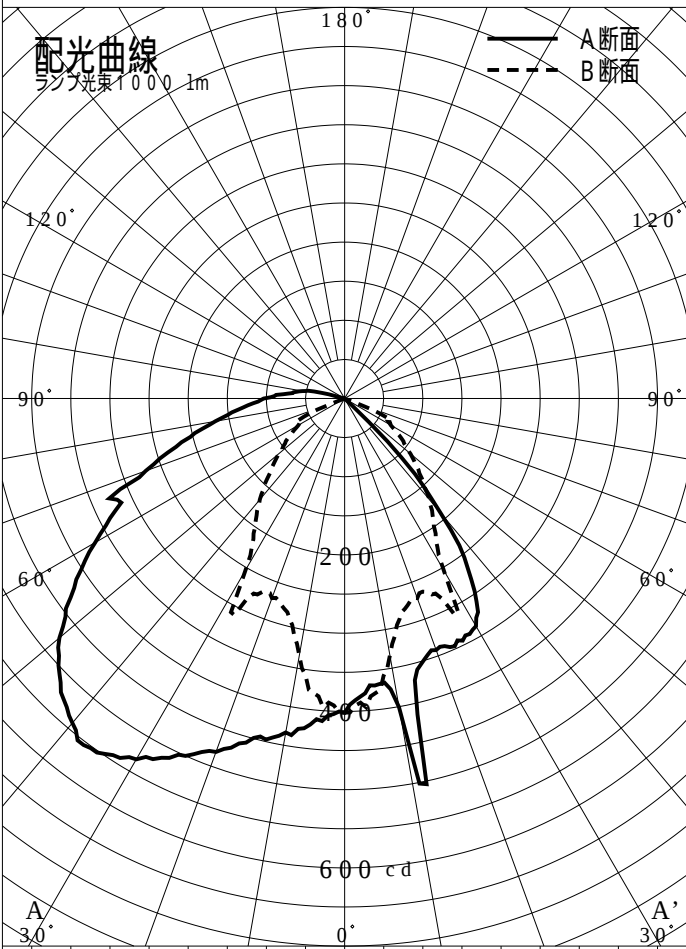

直射水平面照度


ランプ光束1000lm

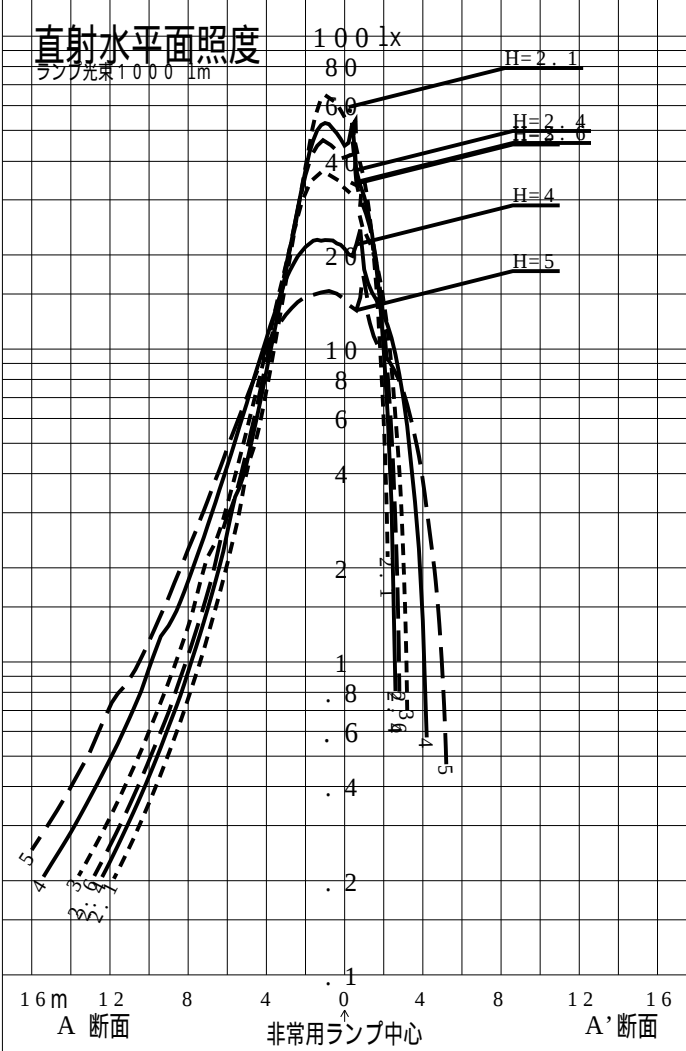

A 断面

非常用ランプ中心

A' 断面

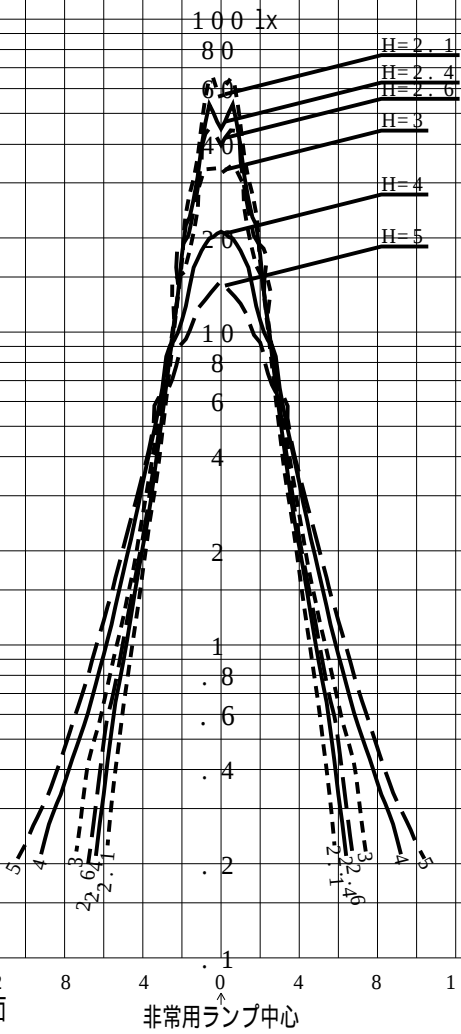

B 断面

非常用ランプ中心

B' 断面

品番	XLF433CNN(CEILING)		
名称			
光源	LED5000/98/480		
管理番号	K0151846(1)DR1		
光束	960lm x 1.00		
保守率	0.93		
適用品番	設計照度Eを得るための読取照度		
	E = 2.0	E = 1.0	E = 0.5
XLF433CNN(CEILING)	2.2	1.1	0.6
備考	非常点灯時の照度 (30分後)		

品番	XLF433CNN(CEI LI NG)			
名称				
光源	LED5000 / 98 / 480			
管理番号	K0151846(16) DR 1			
光束	960.0 l m * 1.00		備考	非常点灯時の照度 (30分後)
保守率	0.93			

非常灯配置表

器具取付高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単体配置	A1	5.9	6.0	6.1	6.2	6.4	6.5	6.6	6.8	6.9	6.9	6.9	6.9	7.0	7.1	7.1	7.2
	A' 1	2.2	2.3	2.4	2.5	2.6	2.7	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.3	3.4	3.5
	B1	3.8	3.8	3.9	3.9	4.0	4.0	4.0	4.1	4.1	4.2	4.2	4.3	4.3	4.4	4.4	4.5
直線配置	A2	8.1	8.5	8.5	8.9	9.1	9.4	9.6	9.8	10.0	10.2	10.4	10.5	10.7	10.8	11.0	11.2
	B2	7.6	7.9	8.2	8.5	8.8	9.0	9.3	9.5	9.7	9.9	10.1	10.3	10.4	10.6	10.7	11.0
四角配置	A4	7.4	7.4	7.7	7.7	7.9	7.9	8.2	8.4	8.7	8.8	8.9	9.2	9.2	9.5	9.5	9.6
	B4	7.6	7.9	8.2	8.5	8.8	9.0	9.2	9.3	9.4	9.6	9.8	9.8	10.2	10.2	10.5	10.6
壁からの距離 (最大)	A0	1.0	1.0	1.0	1.0	1.0	1.0	1.1	1.1	1.1	1.2	1.1	1.4	1.2	1.3	1.3	1.3
	B0	2.5	2.8	2.6	2.9	3.0	3.2	3.1	3.2	3.2	3.2	3.4	3.3	3.6	3.5	3.6	3.6

器具取付高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単体配置	A1	7.3	7.4	7.4	7.5	7.6	7.6	7.7	7.8	7.8	8.1	8.3	8.5	8.7	8.8	8.9	9.0
	A' 1	3.6	3.7	3.7	3.8	3.9	4.0	4.0	4.1	4.2	4.5	4.8	5.0	5.3	5.5	5.6	5.7
	B1	4.5	4.5	4.6	4.6	4.6	4.6	4.7	4.7	4.7	4.8	4.9	5.0	5.0	5.0	5.0	5.1
直線配置	A2	11.4	11.5	11.8	11.9	12.1	12.3	12.4	12.6	12.8	13.6	14.4	15.1	15.8	16.4	17.0	17.6
	B2	11.1	11.2	11.3	11.4	11.5	11.6	11.6	11.8	11.8	12.3	12.6	13.0	13.1	13.3	13.5	13.6
四角配置	A4	9.7	10.2	10.0	10.3	11.0	11.0	11.2	11.4	11.5	12.2	12.9	13.8	14.3	14.7	15.3	15.9
	B4	10.8	10.6	11.0	11.0	10.6	10.9	11.0	11.0	11.2	11.8	12.2	12.5	12.9	13.3	13.5	13.6
壁からの距離 (最大)	A0	1.3	1.5	1.3	1.4	1.9	1.8	1.9	1.9	1.9	1.9	2.0	2.2	1.9	1.0	1.1	1.0
	B0	3.7	3.6	3.8	3.7	3.4	3.5	3.4	3.4	3.5	3.6	3.7	3.5	3.6	3.9	3.7	3.6

器具取付高さ (m)		8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0						
単体配置	A1	9.0	9.0	8.9	8.8	8.7	8.6	8.2	7.7	6.8	----						
	A' 1	5.8	5.8	5.7	5.5	5.2	4.5	3.8	3.3	3.1	----						
	B1	5.2	4.7	4.6	3.7	3.2	2.8	2.4	2.1	1.6	----						
直線配置	A2	18.1	18.6	19.0	19.3	19.6	19.8	19.9	20.1	20.1	13.6						
	B2	13.7	13.7	13.7	13.6	13.4	13.3	13.1	13.0	12.7	12.0						
四角配置	A4	16.6	17.2	17.8	18.4	19.0	19.5	19.9	20.1	20.1	13.6						
	B4	13.7	13.7	13.7	13.6	13.4	13.3	13.1	13.0	12.6	12.0						
壁からの距離 (最大)	A0	1.1	1.1	1.1	1.1	1.0	1.1	1.1	1.0	1.1	1.0						
	B0	3.2	3.0	2.7	2.3	1.9	1.6	1.0	1.2	1.1	1.0						

階段配置表

器具取付高さ (m)			1.0	1.5	2.0	2.5	3.0	4.0	5.0	6.0	7.0	8.0
Y=1.0 (m)	2.0 Lx	X+	4.0	4.9	5.6	6.2	6.7	7.3	7.9	8.4	8.6	8.8
		X-	1.1	1.5	2.0	2.5	2.9	3.7	4.3	4.8	5.2	5.4
	1.0 Lx	X+	5.1	6.0	6.9	7.6	8.2	9.5	10.0	10.7	11.3	11.8
Y=1.5 (m)	2.0 Lx	X+	3.8	4.7	5.4	6.1	6.5	7.2	7.8	8.3	8.5	8.7
		X-	1.0	1.5	1.9	2.4	2.8	3.5	4.2	4.6	5.0	5.1
	1.0 Lx	X+	4.9	5.9	6.7	7.5	8.1	9.4	10.0	10.6	11.2	11.7
Y=2.0 (m)	2.0 Lx	X+	3.5	4.4	5.2	5.8	6.4	7.1	7.7	8.1	8.4	8.5
		X-	0.7	1.3	1.8	2.2	2.6	3.3	3.9	4.4	4.6	4.7
	1.0 Lx	X+	4.6	5.7	6.5	7.3	8.0	9.2	9.8	10.5	11.1	11.6