

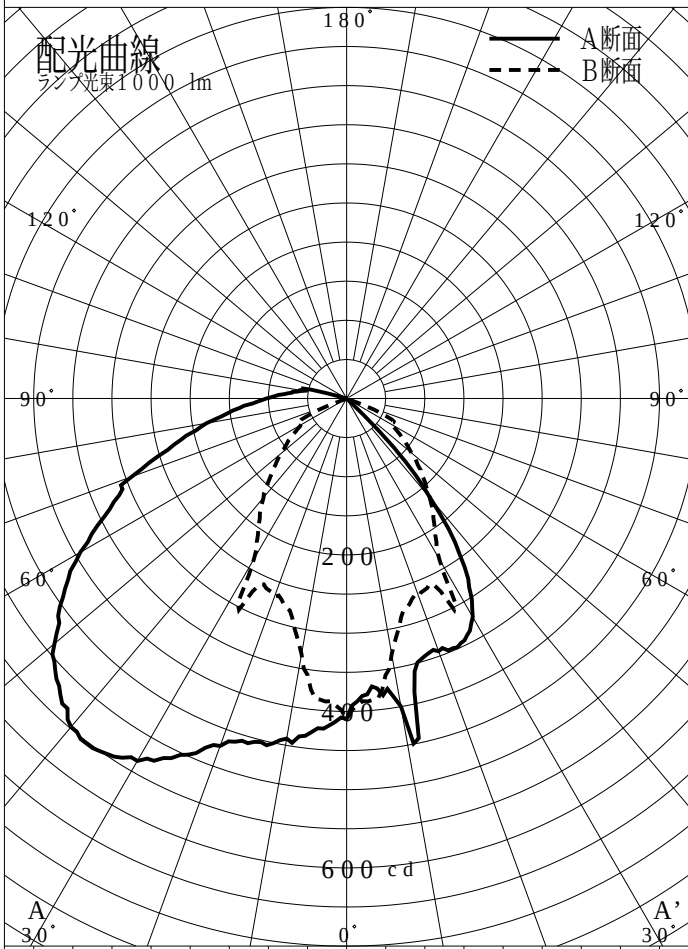


非常用照明器具特性

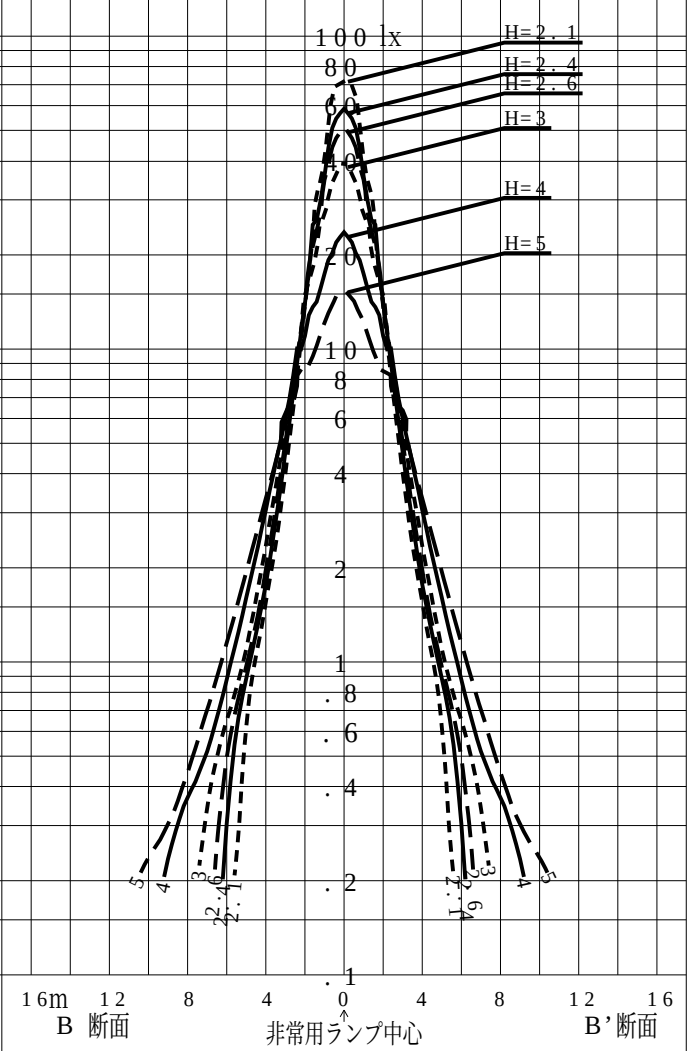

品番	XLF216DTN(CEI LI NG)		
名称			
光源	LED5000/98/470		
管理番号	K0151847(8) DR1		
光束	940lm x 1.00		
保守率	0.93		
適用品番	設計照度Eを得るための読取照度		
	E = 2.0	E = 1.0	E = 0.5
XLF216DTN(CEI LI NG)	2.3	1.1	0.6
備考	非常点灯時の照度 (60 分後)		

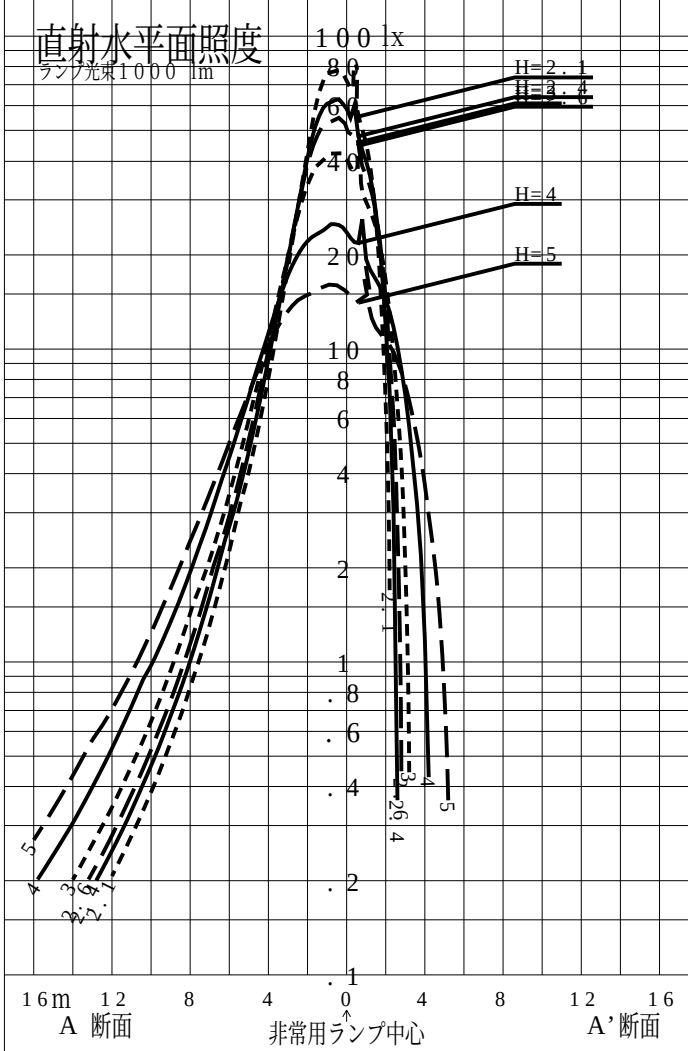

品番	XLF216DTN(CEI LI NG)			
名称				
光源	LED5000 / 98 / 470			
管理番号	K0151847(8) DR 1			
光束	940.0 l m * 1.00		備考	非常点灯時の照度 (60分後)
保守率	0.93			

非常灯配置表

器具取付高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単体配置	A1	6.0	6.1	6.3	6.4	6.5	6.5	6.6	6.7	6.8	6.9	6.9	7.0	7.1	7.2	7.2	7.3
	A' 1	2.2	2.3	2.4	2.5	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.2	3.3	3.4	3.5
	B1	3.6	3.6	3.7	3.7	3.8	3.8	3.9	4.0	4.0	4.0	4.1	4.1	4.2	4.2	4.3	4.3
直線配置	A2	8.3	8.6	8.7	9.0	9.2	9.4	9.6	9.8	10.0	10.2	10.4	10.5	10.8	10.9	11.1	11.3
	B2	7.4	7.7	8.0	8.3	8.6	8.8	9.1	9.3	9.5	9.7	9.9	10.2	10.2	10.3	10.6	10.6
四角配置	A4	7.3	7.3	7.8	7.8	7.9	7.9	8.4	8.2	8.6	8.9	8.9	9.1	9.2	9.6	9.6	9.9
	B4	7.4	7.7	8.0	8.3	8.6	8.8	8.9	9.3	9.3	9.4	9.7	9.8	10.0	9.9	10.2	10.2
壁からの距離 (最大)	A0	1.0	1.0	1.0	1.0	1.0	1.0	1.1	1.0	1.1	1.1	1.1	1.1	1.1	1.3	1.2	1.4
	B0	2.6	2.7	2.5	2.8	2.9	3.1	2.9	3.3	3.1	3.2	3.4	3.3	3.4	3.2	3.4	3.4

器具取付高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単体配置	A1	7.4	7.5	7.5	7.6	7.7	7.7	7.8	7.9	7.9	8.2	8.4	8.6	8.7	8.8	9.0	9.0
	A' 1	3.6	3.6	3.7	3.8	3.9	3.9	4.0	4.1	4.1	4.4	4.7	4.9	5.2	5.3	5.5	5.6
	B1	4.4	4.4	4.4	4.5	4.5	4.5	4.6	4.6	4.6	4.7	4.8	4.8	4.8	4.8	4.8	4.8
直線配置	A2	11.5	11.6	11.9	12.0	12.2	12.3	12.5	12.7	12.8	13.7	14.4	15.1	15.8	16.4	16.9	17.5
	B2	10.7	10.9	10.9	11.1	11.1	11.3	11.3	11.5	11.5	12.0	12.3	12.6	12.8	13.0	13.1	13.2
四角配置	A4	10.2	10.5	10.5	10.6	10.9	10.8	11.0	11.2	11.6	12.5	13.0	13.8	14.2	14.6	15.2	16.0
	B4	10.2	10.2	10.4	10.6	10.6	11.0	11.0	11.1	11.0	11.4	12.0	12.3	12.8	13.0	13.1	13.2
壁からの距離 (最大)	A0	1.5	1.6	1.6	1.5	1.6	1.5	1.5	1.7	1.8	2.0	1.8	2.0	1.4	1.1	1.1	1.0
	B0	3.4	3.3	3.4	3.4	3.4	3.6	3.6	3.6	3.4	3.4	3.5	3.4	3.6	3.7	3.6	3.3

器具取付高さ (m)		8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0						
単体配置	A1	9.0	8.9	8.9	8.8	8.6	8.4	8.0	7.5	6.7	----						
	A' 1	5.6	5.6	5.5	5.3	5.0	4.3	3.5	3.0	1.7	----						
	B1	4.9	4.6	4.0	3.4	2.9	2.6	2.3	2.0	1.6	----						
直線配置	A2	18.0	18.4	18.8	19.0	19.3	19.5	19.6	19.7	19.6	13.5						
	B2	13.3	13.3	13.2	13.1	12.9	12.7	12.4	12.2	12.0	11.2						
四角配置	A4	16.6	17.2	17.9	18.6	19.2	19.5	19.6	19.7	19.6	13.5						
	B4	13.3	13.3	13.2	13.1	12.9	12.7	12.4	12.2	12.0	11.2						
壁からの距離 (最大)	A0	1.0	1.1	1.0	1.0	1.0	1.1	1.0	1.0	1.1	1.0						
	B0	3.0	2.7	2.4	1.7	1.2	1.1	1.3	1.0	1.3	1.0						

階段配置表

器具取付高さ (m)			1.0	1.5	2.0	2.5	3.0	4.0	5.0	6.0	7.0	8.0
Y=1.0 (m)	2.0 Lx	X+	4.1	5.0	5.7	6.3	6.7	7.5	8.1	8.5	8.7	8.8
		X-	1.0	1.5	2.0	2.4	2.8	3.6	4.2	4.7	5.1	5.3
	1.0 Lx	X+	5.2	6.2	7.0	7.7	8.4	9.4	10.2	10.9	11.5	11.9
Y=1.5 (m)	2.0 Lx	X+	3.9	4.8	5.5	6.1	6.6	7.3	7.9	8.3	8.6	8.7
		X-	0.9	1.4	1.9	2.3	2.7	3.4	4.0	4.5	4.8	4.9
	1.0 Lx	X+	5.0	6.0	6.9	7.6	8.3	9.3	10.1	10.8	11.4	11.8
Y=2.0 (m)	2.0 Lx	X+	3.5	4.5	5.3	5.9	6.4	7.2	7.8	8.2	8.4	8.5
		X-	0.5	1.2	1.7	2.2	2.6	3.2	3.8	4.1	4.4	4.4
	1.0 Lx	X+	4.7	5.8	6.7	7.4	8.1	9.2	10.0	10.7	11.3	11.7