

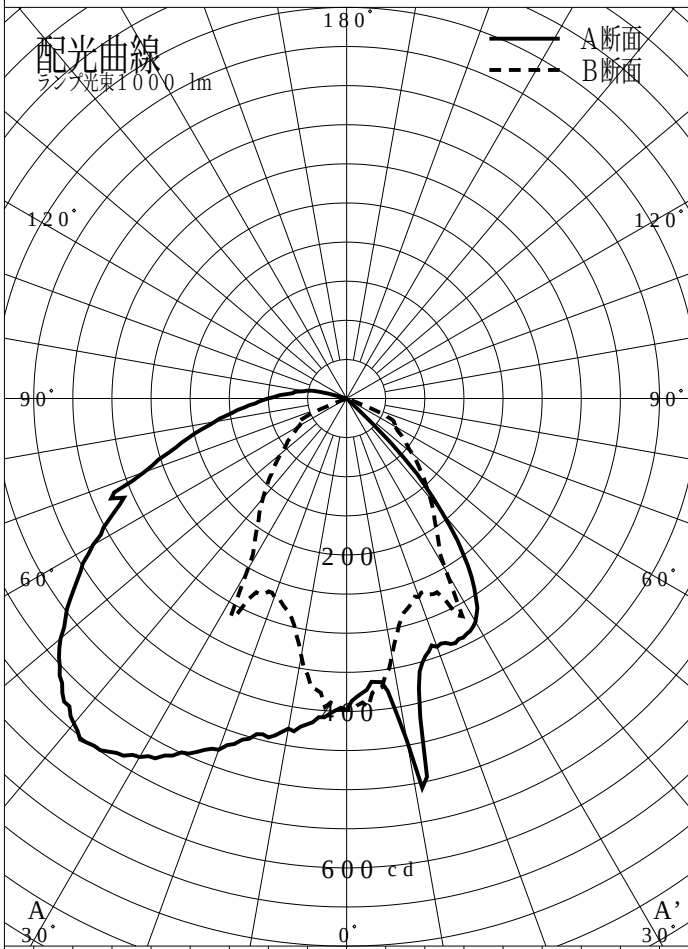


非常用照明器具特性

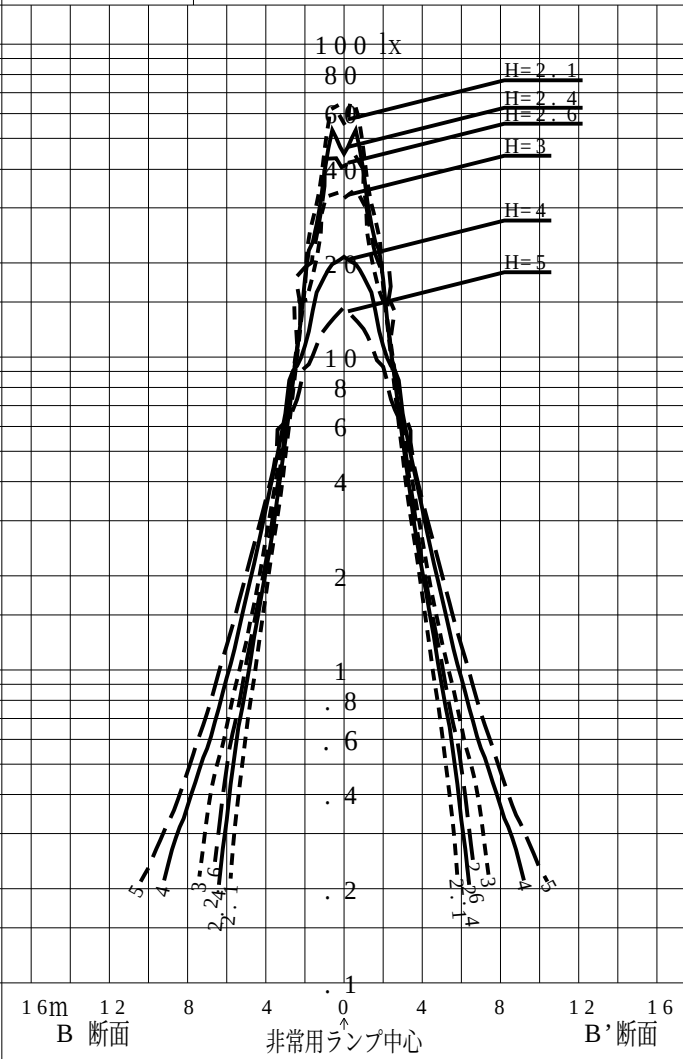

品番	XLF436CTN(CEI LI NG)		
名称			
光源	LED5000/98/480		
管理番号	K0151838(1) DR1		
光束	960lm x 1.00		
保守率	0.93		
適用品番	設計照度Eを得るための読取照度		
	E = 2.0	E = 1.0	E = 0.5
XLF436CTN(CEI LI NG)	2.2	1.1	0.6
備考	非常点灯時の照度 (60 分後)		

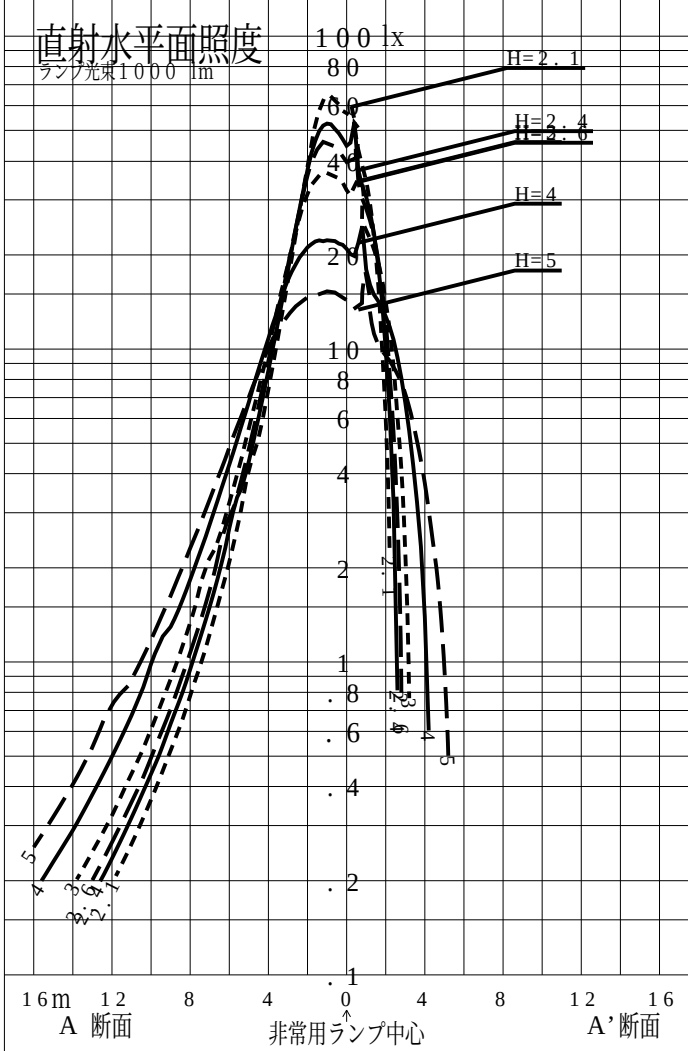

品番	X L F 4 3 6 C T N (C E I L I N G)			
名称				
光源	L E D 5 0 0 0 / 9 8 / 4 8 0			
管理番号	K 0 1 5 1 8 3 8 (1 5) D R 1			
光束	9 6 0 . 0 l m * 1 . 0 0		備考	非常点灯時の照度 (6 0 分後)
保守率	0 . 9 3			

非常灯配置表

器具取付高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単体配置	A1	5.9	6.0	6.2	6.3	6.4	6.5	6.7	6.8	6.9	6.9	6.9	6.9	7.0	7.1	7.2	7.2
	A' 1	2.2	2.3	2.4	2.5	2.6	2.7	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.3	3.4	3.5
	B1	3.8	3.8	3.9	3.9	4.0	4.0	4.0	4.1	4.2	4.2	4.2	4.3	4.3	4.4	4.4	4.5
直線配置	A2	8.2	8.5	8.7	9.0	9.2	9.4	9.7	9.9	10.1	10.1	10.5	10.5	10.7	10.9	11.1	11.2
	B2	7.6	7.9	8.2	8.5	8.8	9.0	9.3	9.5	9.7	9.9	10.1	10.3	10.4	10.8	10.8	10.9
四角配置	A4	7.4	7.4	7.8	7.7	7.9	7.9	8.4	8.5	8.7	8.8	8.9	9.2	9.2	9.4	9.6	9.7
	B4	7.6	7.9	8.2	8.5	8.8	9.0	9.0	9.2	9.4	9.6	9.9	9.8	10.2	10.3	10.3	10.5
壁からの距離 (最大)	A0	1.0	1.0	1.0	1.0	1.0	1.0	1.1	1.1	1.1	1.2	1.2	1.3	1.2	1.3	1.4	1.4
	B0	2.5	2.8	2.7	2.9	2.9	3.2	3.1	3.1	3.2	3.3	3.4	3.3	3.6	3.5	3.5	3.6

器具取付高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単体配置	A1	7.3	7.4	7.5	7.5	7.6	7.6	7.7	7.8	7.8	8.1	8.3	8.5	8.7	8.8	8.9	9.0
	A' 1	3.6	3.7	3.7	3.8	3.9	4.0	4.1	4.1	4.2	4.5	4.8	5.0	5.3	5.4	5.6	5.7
	B1	4.5	4.5	4.6	4.6	4.6	4.6	4.7	4.7	4.7	4.8	4.9	5.0	5.0	5.0	5.0	5.1
直線配置	A2	11.4	11.6	11.8	12.0	12.1	12.3	12.5	12.7	12.8	13.7	14.4	15.1	15.8	16.4	17.0	17.6
	B2	11.1	11.2	11.3	11.4	11.5	11.6	11.7	11.8	11.9	12.3	12.5	13.0	13.1	13.3	13.4	13.5
四角配置	A4	9.9	10.2	10.2	10.6	10.6	11.0	11.2	11.2	11.4	12.3	13.0	14.0	14.5	14.8	15.5	16.0
	B4	10.6	10.6	10.8	10.7	11.0	10.9	11.0	11.2	11.3	11.7	12.2	12.2	12.7	13.2	13.4	13.5
壁からの距離 (最大)	A0	1.4	1.6	1.5	1.8	1.6	1.8	1.8	1.8	1.8	2.0	2.1	2.4	2.2	1.2	1.0	1.1
	B0	3.5	3.6	3.6	3.5	3.7	3.5	3.6	3.6	3.6	3.6	3.7	3.3	3.6	3.7	3.5	3.5

器具取付高さ (m)		8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0						
単体配置	A1	9.0	9.0	8.9	8.8	8.7	8.5	8.1	7.6	6.8	----						
	A' 1	5.7	5.7	5.6	5.5	5.1	4.4	3.7	3.3	3.2	----						
	B1	5.2	4.7	4.6	3.8	3.2	2.8	2.4	2.0	1.6	----						
直線配置	A2	18.1	18.6	19.0	19.3	19.6	19.8	19.9	20.1	20.0	13.6						
	B2	13.6	13.6	13.6	13.5	13.3	13.2	13.0	12.9	12.7	12.0						
四角配置	A4	16.6	17.2	18.0	18.4	19.2	19.5	19.9	20.1	20.0	13.6						
	B4	13.6	13.6	13.6	13.5	13.3	13.2	13.0	12.9	12.6	12.0						
壁からの距離 (最大)	A0	1.1	1.2	1.1	1.1	1.0	1.1	1.0	1.0	1.1	1.0						
	B0	3.3	3.0	2.5	2.4	1.8	1.7	1.0	1.2	1.3	1.0						

階段配置表

器具取付高さ (m)			1.0	1.5	2.0	2.5	3.0	4.0	5.0	6.0	7.0	8.0
Y=1.0 (m)	2.0 Lx	X+	4.1	4.9	5.6	6.2	6.7	7.4	8.0	8.4	8.7	8.8
		X-	1.1	1.5	2.0	2.5	2.9	3.7	4.3	4.8	5.2	5.4
	1.0 Lx	X+	5.1	6.1	6.9	7.6	8.3	9.5	10.1	10.8	11.3	11.8
Y=1.5 (m)	2.0 Lx	X+	3.9	4.7	5.4	6.1	6.6	7.3	7.9	8.3	8.6	8.7
		X-	1.0	1.5	1.9	2.4	2.8	3.5	4.2	4.6	4.9	5.1
	1.0 Lx	X+	4.9	5.9	6.8	7.5	8.2	9.4	10.0	10.7	11.3	11.7
Y=2.0 (m)	2.0 Lx	X+	3.6	4.5	5.2	5.9	6.4	7.1	7.7	8.1	8.4	8.5
		X-	0.7	1.3	1.8	2.2	2.7	3.3	3.9	4.4	4.6	4.7
	1.0 Lx	X+	4.7	5.7	6.6	7.3	8.0	9.3	9.9	10.6	11.2	11.6