

屋外照明器具特性


品番(品名)	XYG0016RK																		
光源	LED2700_70_420 x1 420.0 lm																		
管理番号	K0172105 (5) DR 1																		
JIS C8131-1999 による配光形式																			
器具効率	100.0 %				直下光度				0.0 cd / 1000lm										
上方光束	46.3%				最大光度				107.0 cd / 1000lm										
下方光束	53.7%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
= 0° 鉛直面	0	4	12	22	32	42	52	61	70	78	85	91	96	100	104	105	106	106	105
90°	0	4	12	22	32	42	52	61	70	78	85	91	96	100	104	105	106	106	105
180°	0	4	12	22	32	42	52	61	70	78	85	91	96	100	104	105	106	106	105
270°	0	4	12	22	32	42	52	61	70	78	85	91	96	100	104	105	106	106	105
I _{max} を含む鉛直面	0	4	12	22	32	42	52	61	70	78	85	91	96	100	104	105	106	106	105
配光曲線 cd / 1000 lm					150°				180°				150°				120°		

道路・トンネル照明率曲線

品番(品名)	XYG0016RK	光源	LED2700_70_420 x 1
管理番号	K0172105 (5)DR 1		

— = 0.0°

H: 取付高さ(MOUNTING HEIGHT)

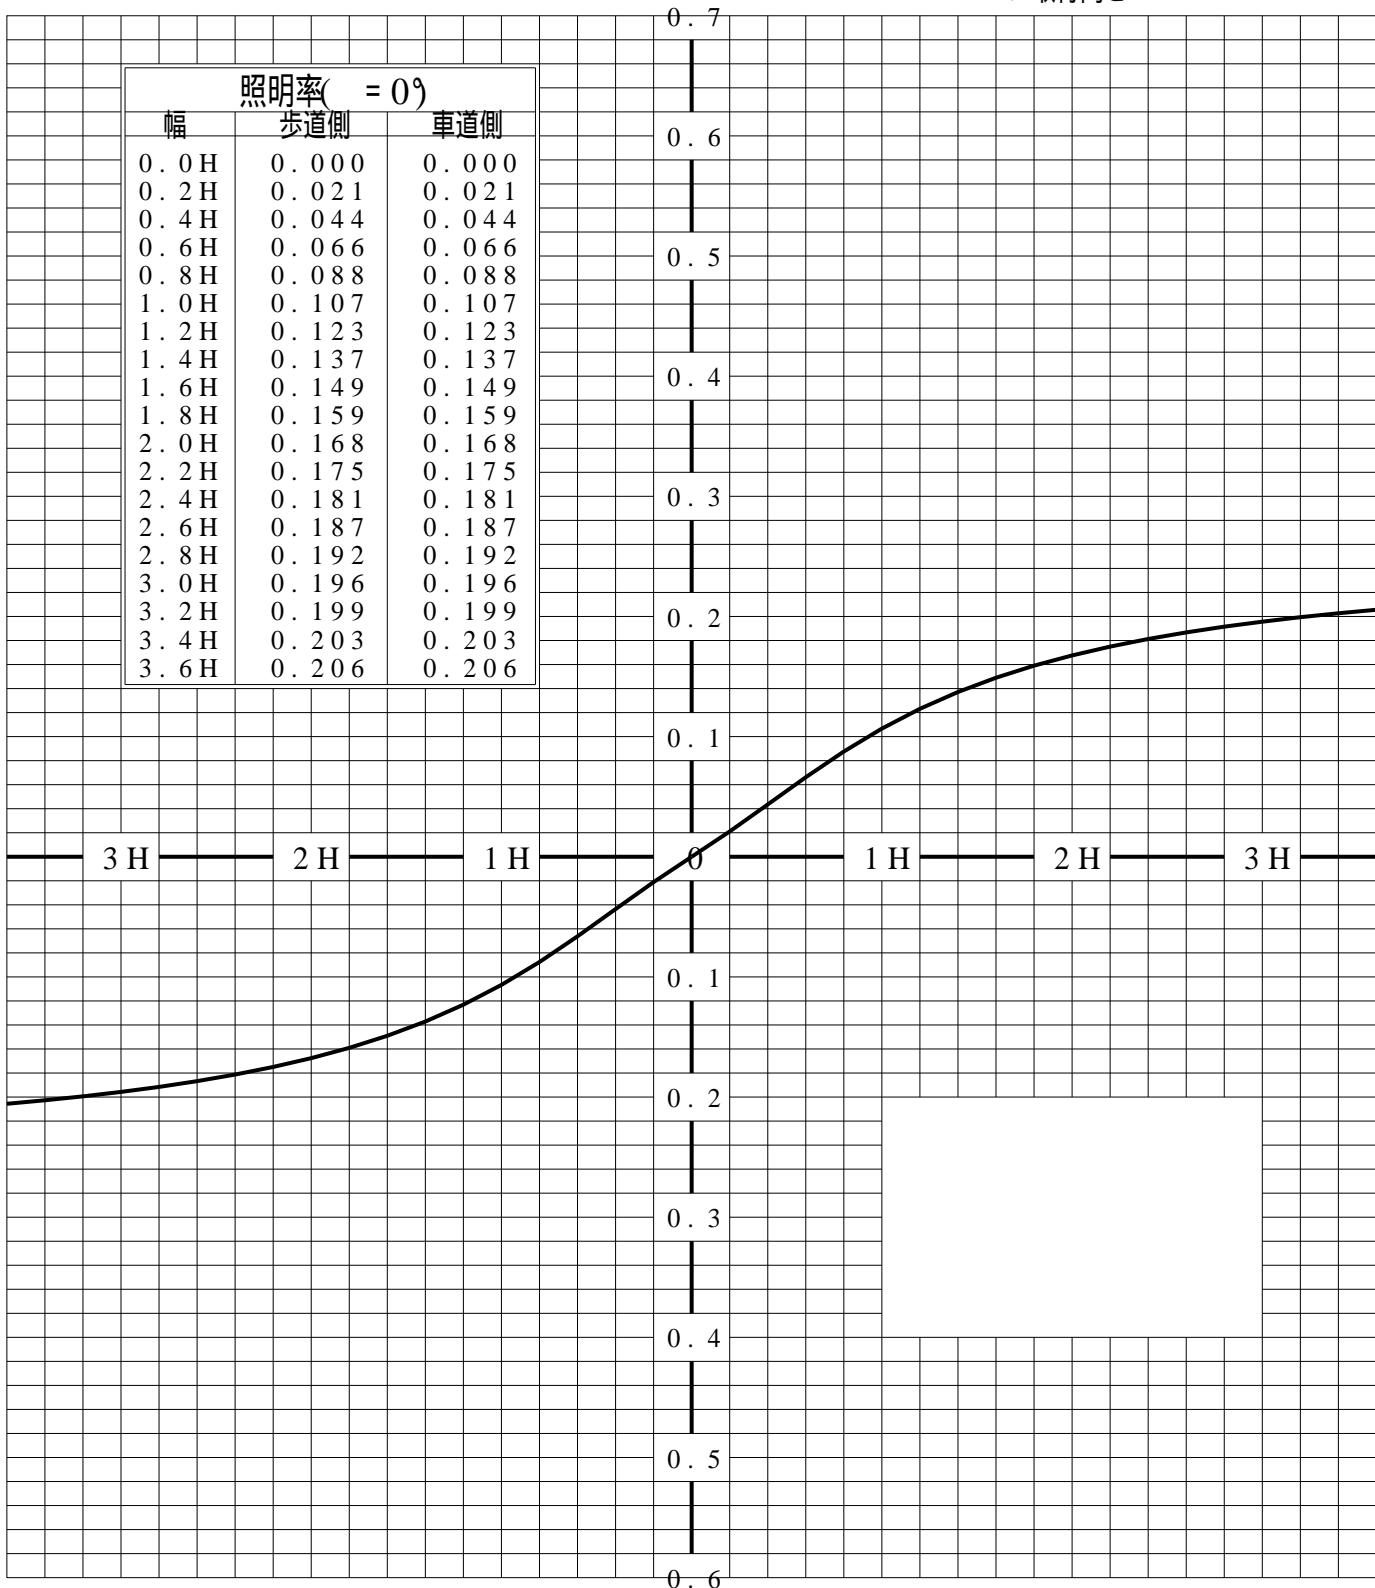


歩道側



車道側

等照度曲線

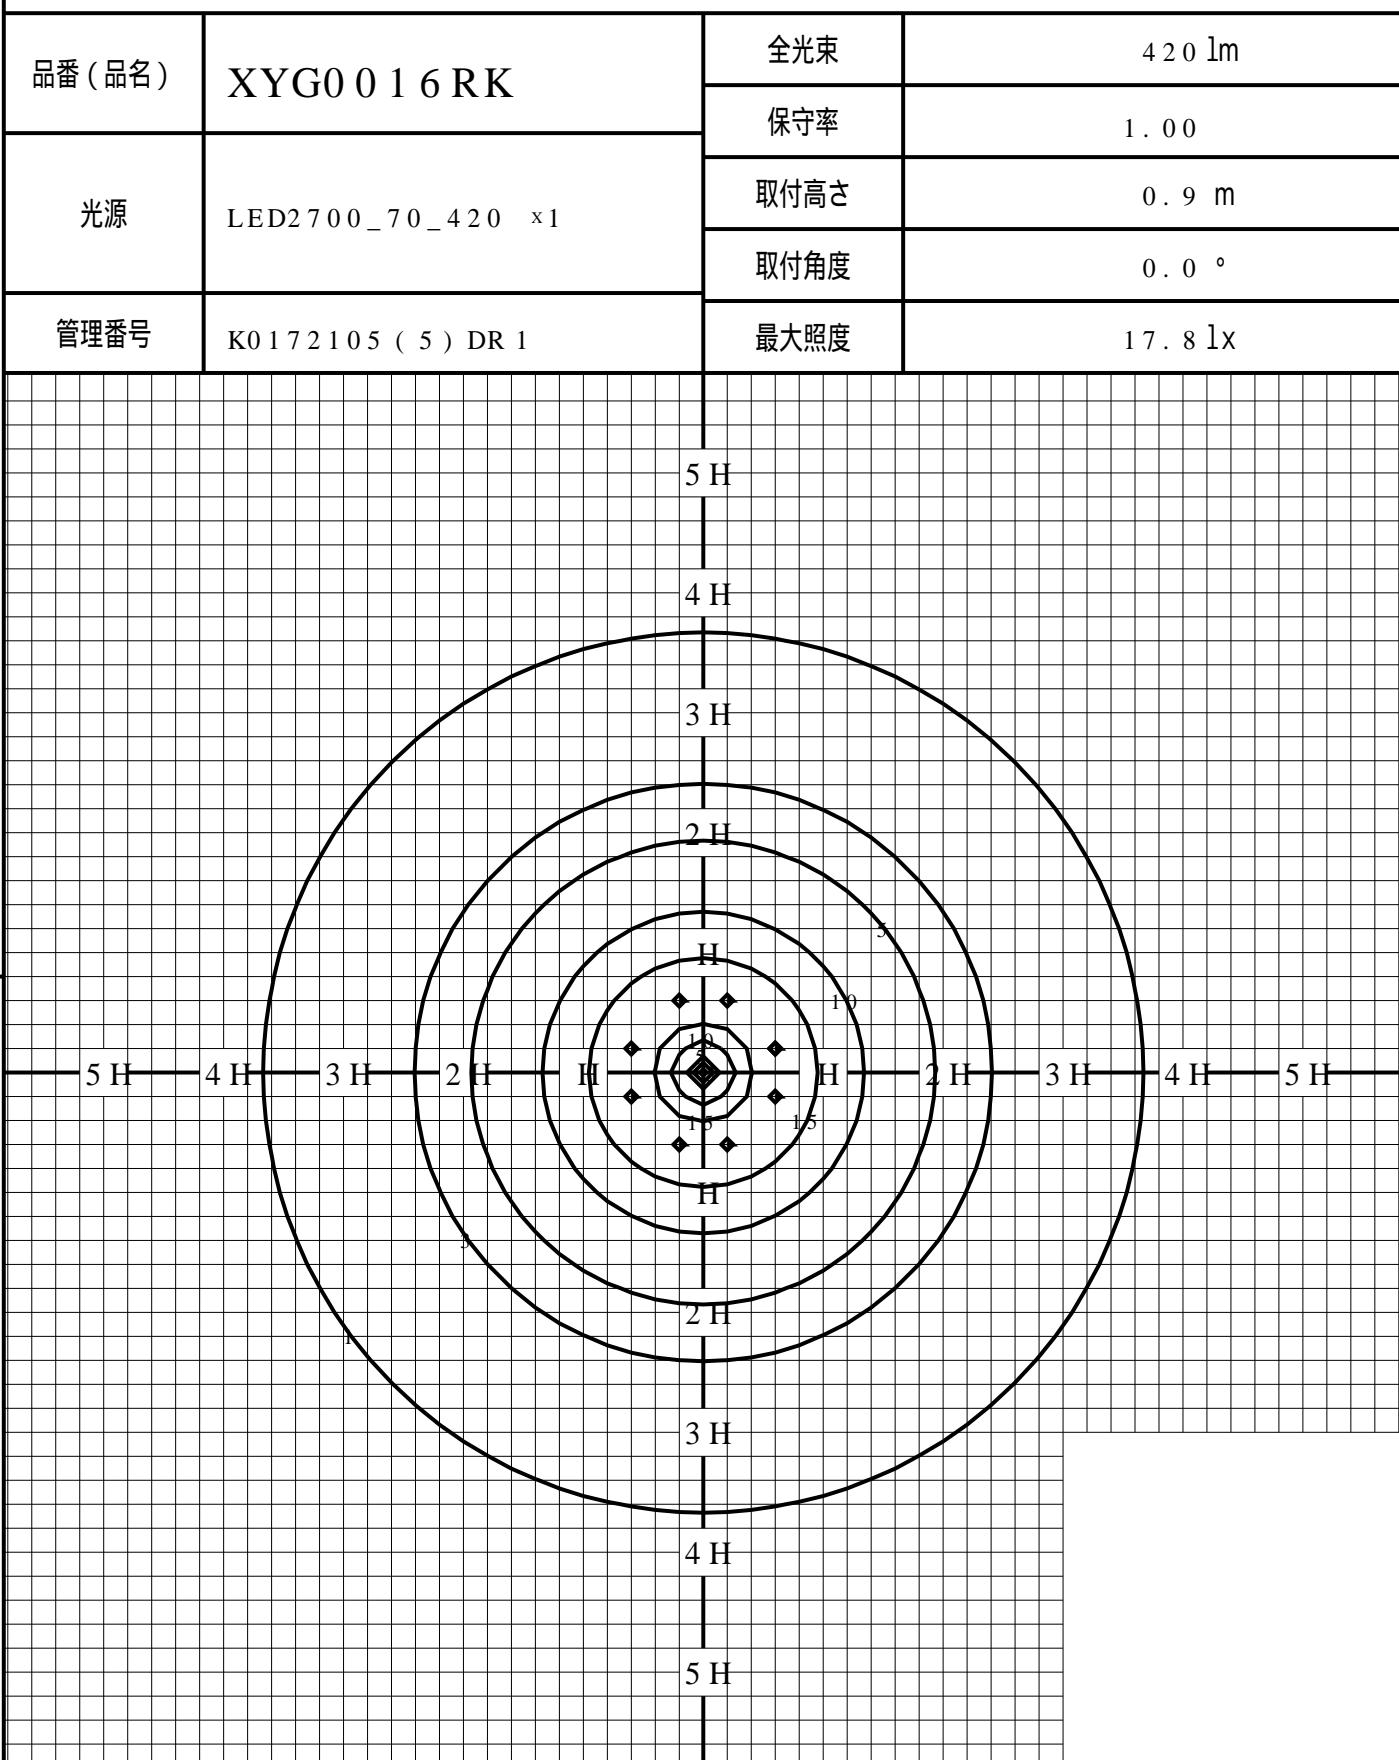

◆ 印は最大照度の位置を示す。

単位：lx

取付高さが異なる場合は照度の値に下表の補正係数を掛けて下さい。

H : 取付高さ

取付高さ	1 m	2 m	3 m	4 m	5 m	6 m	7 m	8 m	9 m	10 m
補正係数	0.810	0.202	0.090	0.050	0.032	0.022	0.016	0.012	0.010	0.008