



投光照明器具特性					
品名 (品番)	YYY3 2 7 3 4 + YYY9 5 0 6 1				
光源	LED3000_70_710 ×1 710.0 lm				
管理番号	K0172120(0)DJ1 XY				



配光の区分・種類	非対称配光	主ビ - ム効率	%			
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.0 %	ビ - ム効率	47.9%	95.8%	97.9%	
最大光度	2164 cd/1000 lm	ビ - ム角 AA' 34.8 BB' 35.8	68.4 73.2	72.5 77.0		

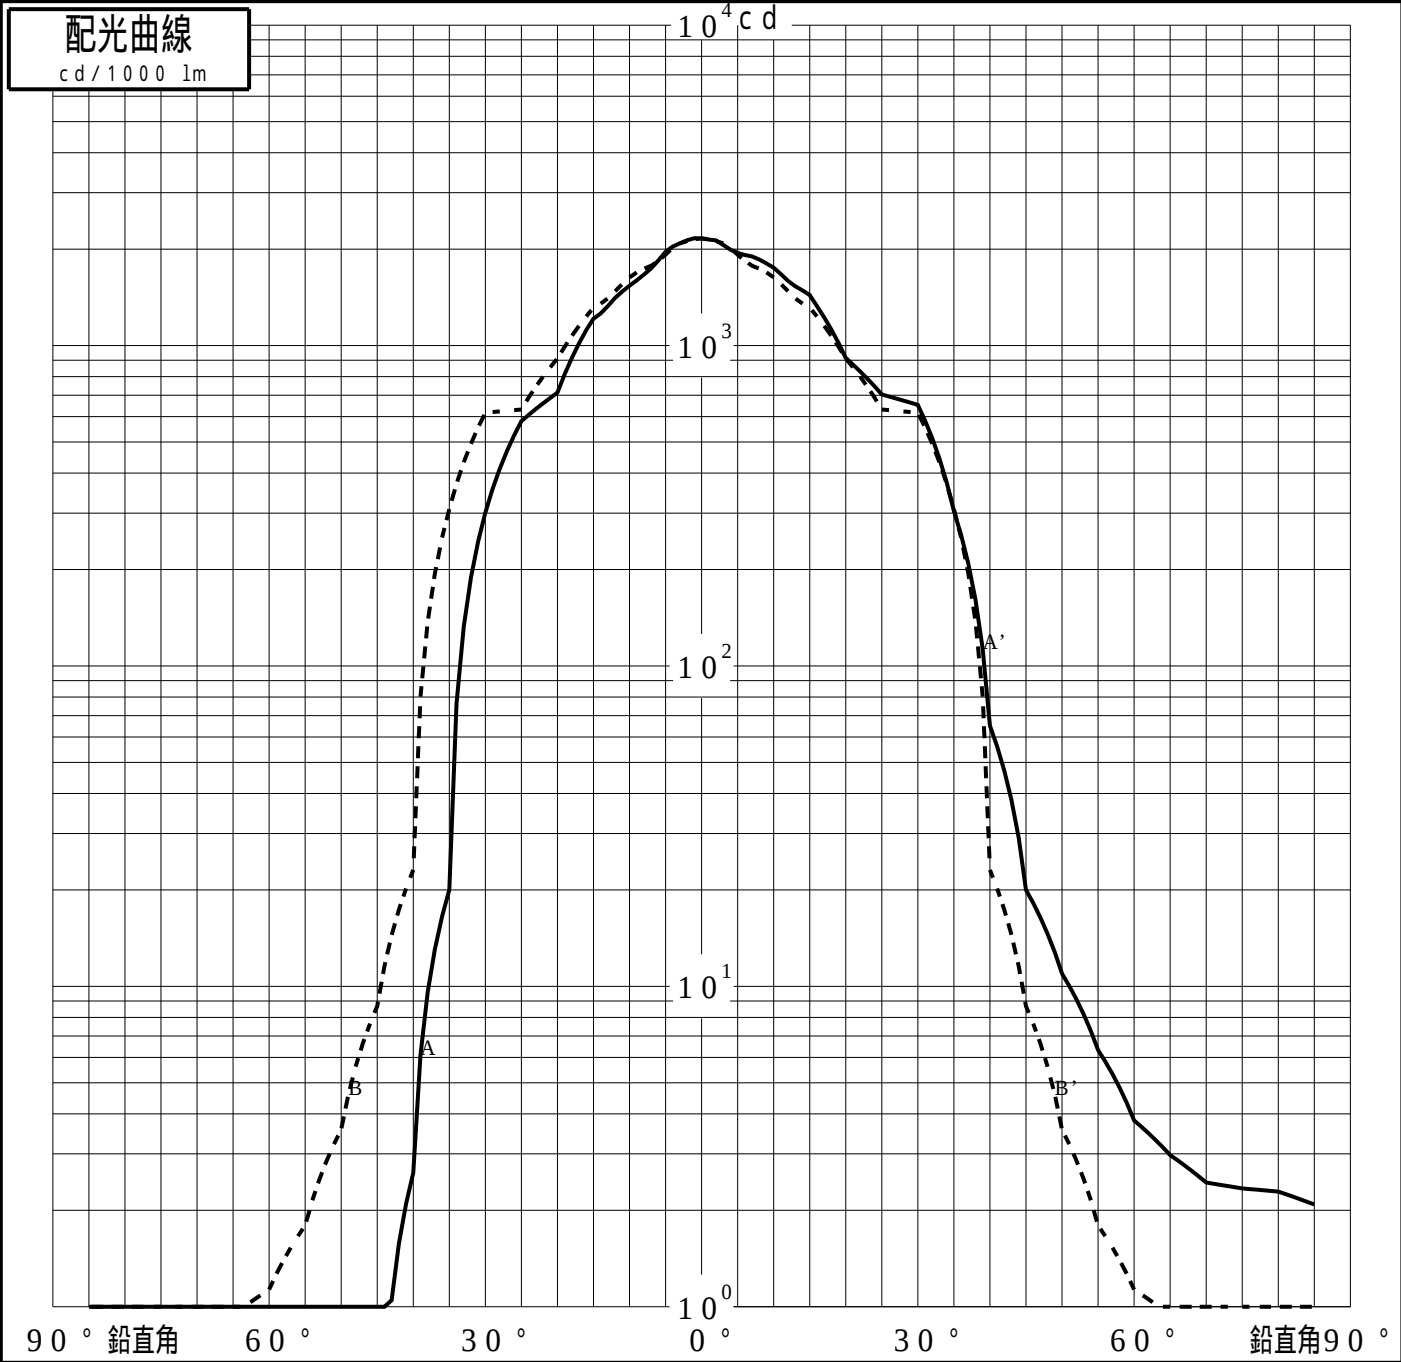

投光照明器具特性

品番 (品名)	YYY32734+YYY95061	光源	LED3000_70_710 ×1
管理番号	K0172120(0)DJ1 XY		

累積光束曲線

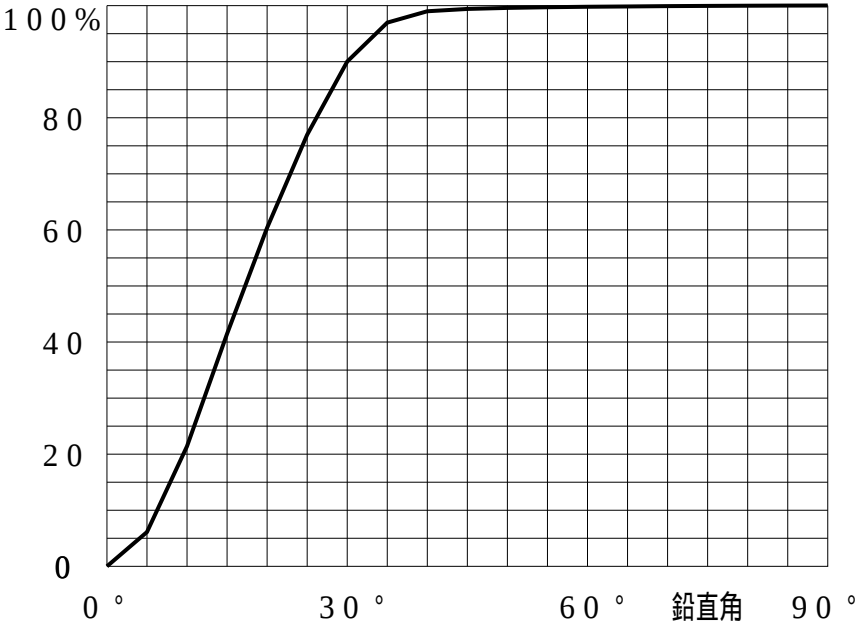

等光度曲線

(αβ座標系)
cd/1000 lm

