


# 屋外照明器具特性

品番(品名)	XY7613K																		
光源	LED3500_70_3500 x2      3500.0 lm																		
管理番号	K0150393(1)DB1																		
JISC8131-1999 による配光形式																			
器具効率	100.0%	直下光度	34.9 cd/1000lm																
上方光束	30.3%	最大光度	143.8 cd/1000lm																
下方光束	69.7%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	34	35	37	43	51	60	69	79	88	98	106	113	120	125	129	132	135	135	130
90°	34	35	37	43	51	60	71	82	92	102	111	118	125	130	135	138	140	139	133
180°	34	35	37	43	51	60	69	79	88	98	106	113	120	125	129	132	135	135	130
270°	34	35	37	43	51	60	71	82	92	102	111	118	125	130	135	138	140	139	133
I <sub>max</sub> を含む鉛直面	34	35	37	43	51	60	70	82	93	104	114	121	128	134	139	142	143	141	135

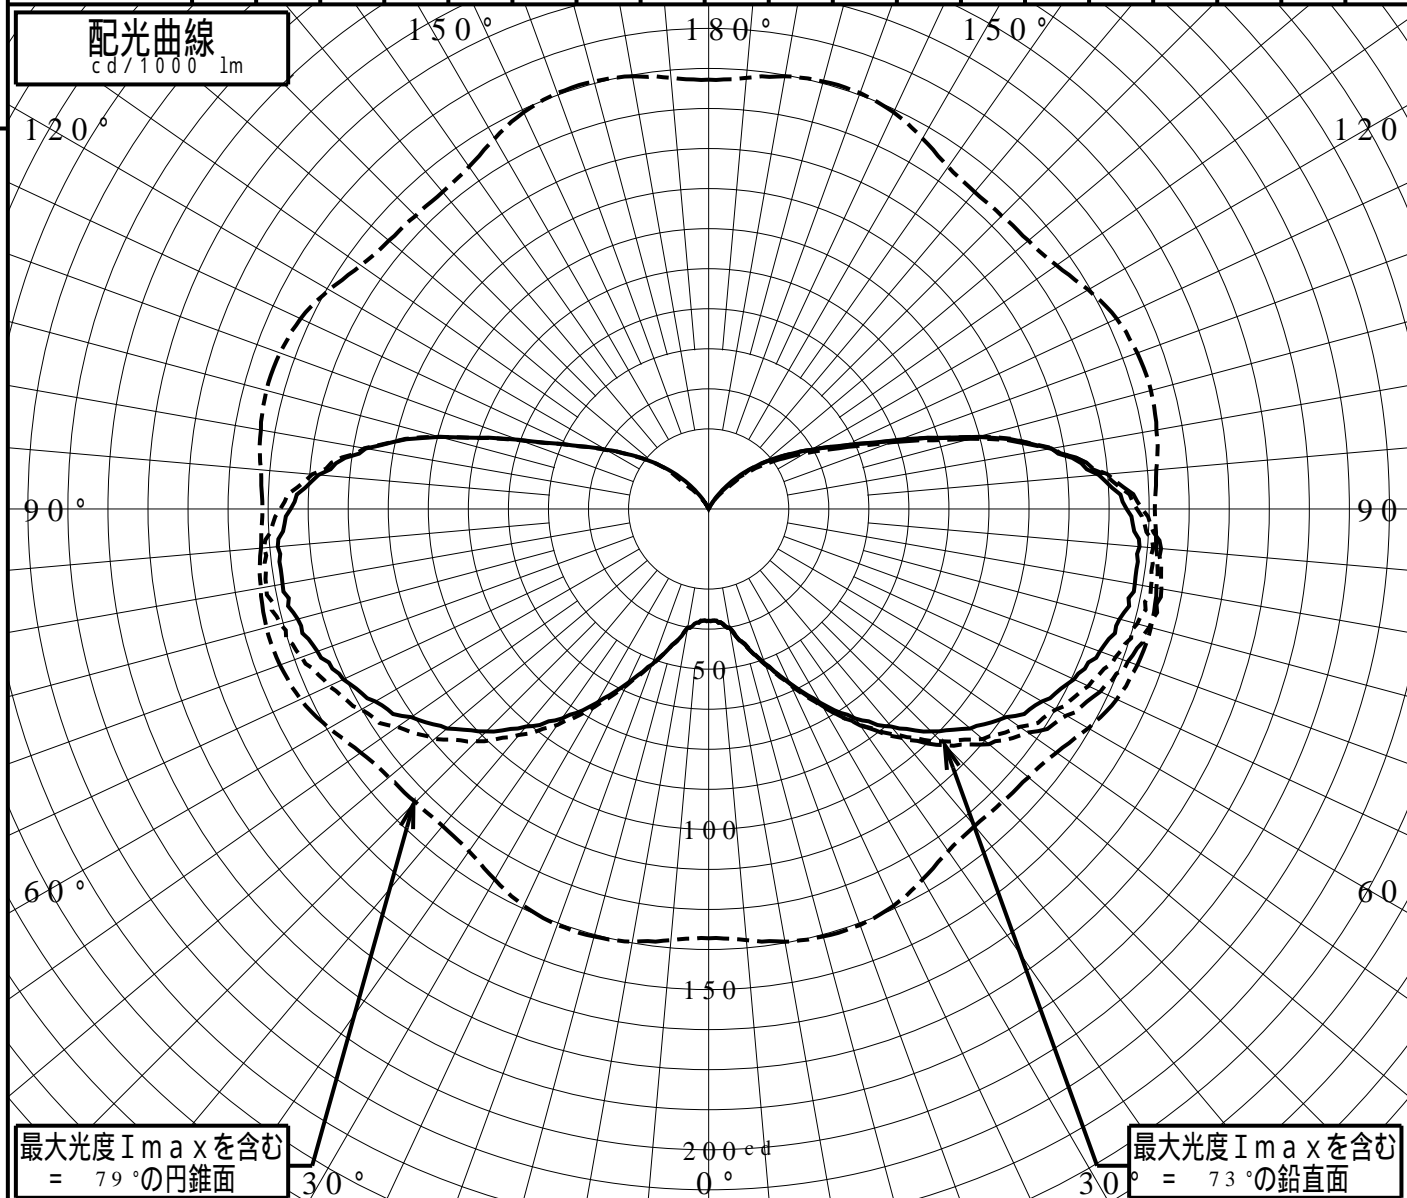

# 正弦等光度曲線

品番(品名)	XY7613K	光源	LED3500_70_3500 x2
管理番号	K0150393(1)DB 1		

