


屋外照明器具特性

品番(品名)	XY7614K																		
光源	LED5000_70_5000 ×2 5000.0 lm																		
管理番号	K0150392(1)DB1																		
JISC8131-1999 による配光形式																			
器具効率	100.0%	直下光度	23.8 cd/1000lm																
上方光束	39.3%	最大光度	137.0 cd/1000lm																
下方光束	60.7%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	23	24	28	35	43	51	59	68	75	83	91	96	102	107	111	113	114	115	113
90°	23	24	27	33	41	50	59	68	78	88	98	106	114	121	127	130	132	133	130
180°	23	24	28	35	43	51	59	68	75	83	91	96	102	107	111	113	114	115	113
270°	23	24	27	33	41	50	59	68	78	88	98	106	114	121	127	130	132	133	130
I _{max} を含む鉛直面	23	24	28	35	43	52	62	72	82	93	103	112	120	127	132	135	136	136	134

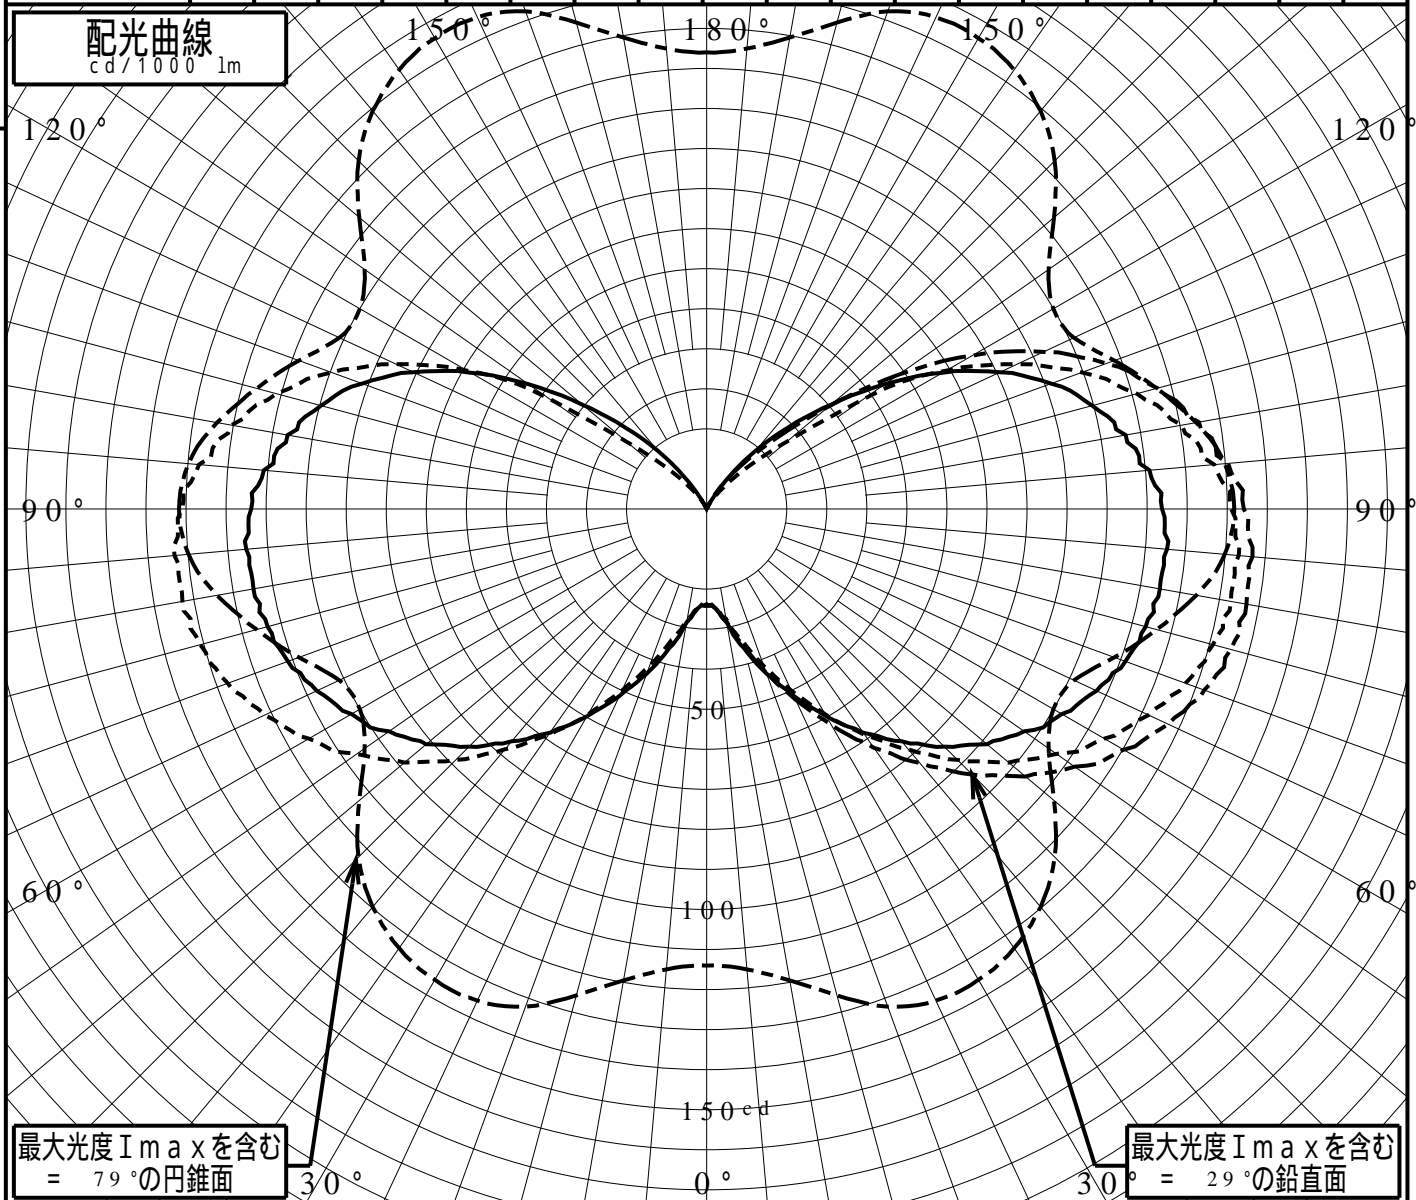

正弦等光度曲線

品番(品名)	XY7614K	光源	LED5000_70_5000 x2
管理番号	K0150392(1)DB 1		

