


屋外照明器具特性

品番(品名)	XY7616K																		
光源	LED5000_70_5400 ×2 5400.0 lm																		
管理番号	K0151451(1)DB1																		
JISC8131-1999 による配光形式																			
器具効率	100.0%	直下光度	32.5 cd/1000lm																
上方光束	37.0%	最大光度	129.9 cd/1000lm																
下方光束	62.9%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	32	33	37	42	49	55	62	71	79	87	95	100	104	106	108	110	110	109	107
90°	32	32	35	41	47	53	61	72	82	92	100	105	110	112	114	116	117	117	115
180°	32	31	33	38	44	50	58	67	77	86	95	100	104	107	109	110	111	110	109
270°	32	32	35	41	47	53	61	72	82	92	100	105	110	112	114	116	117	117	115
I _{max} を含む鉛直面	32	32	35	41	48	56	66	77	87	98	107	114	120	123	126	129	129	128	126

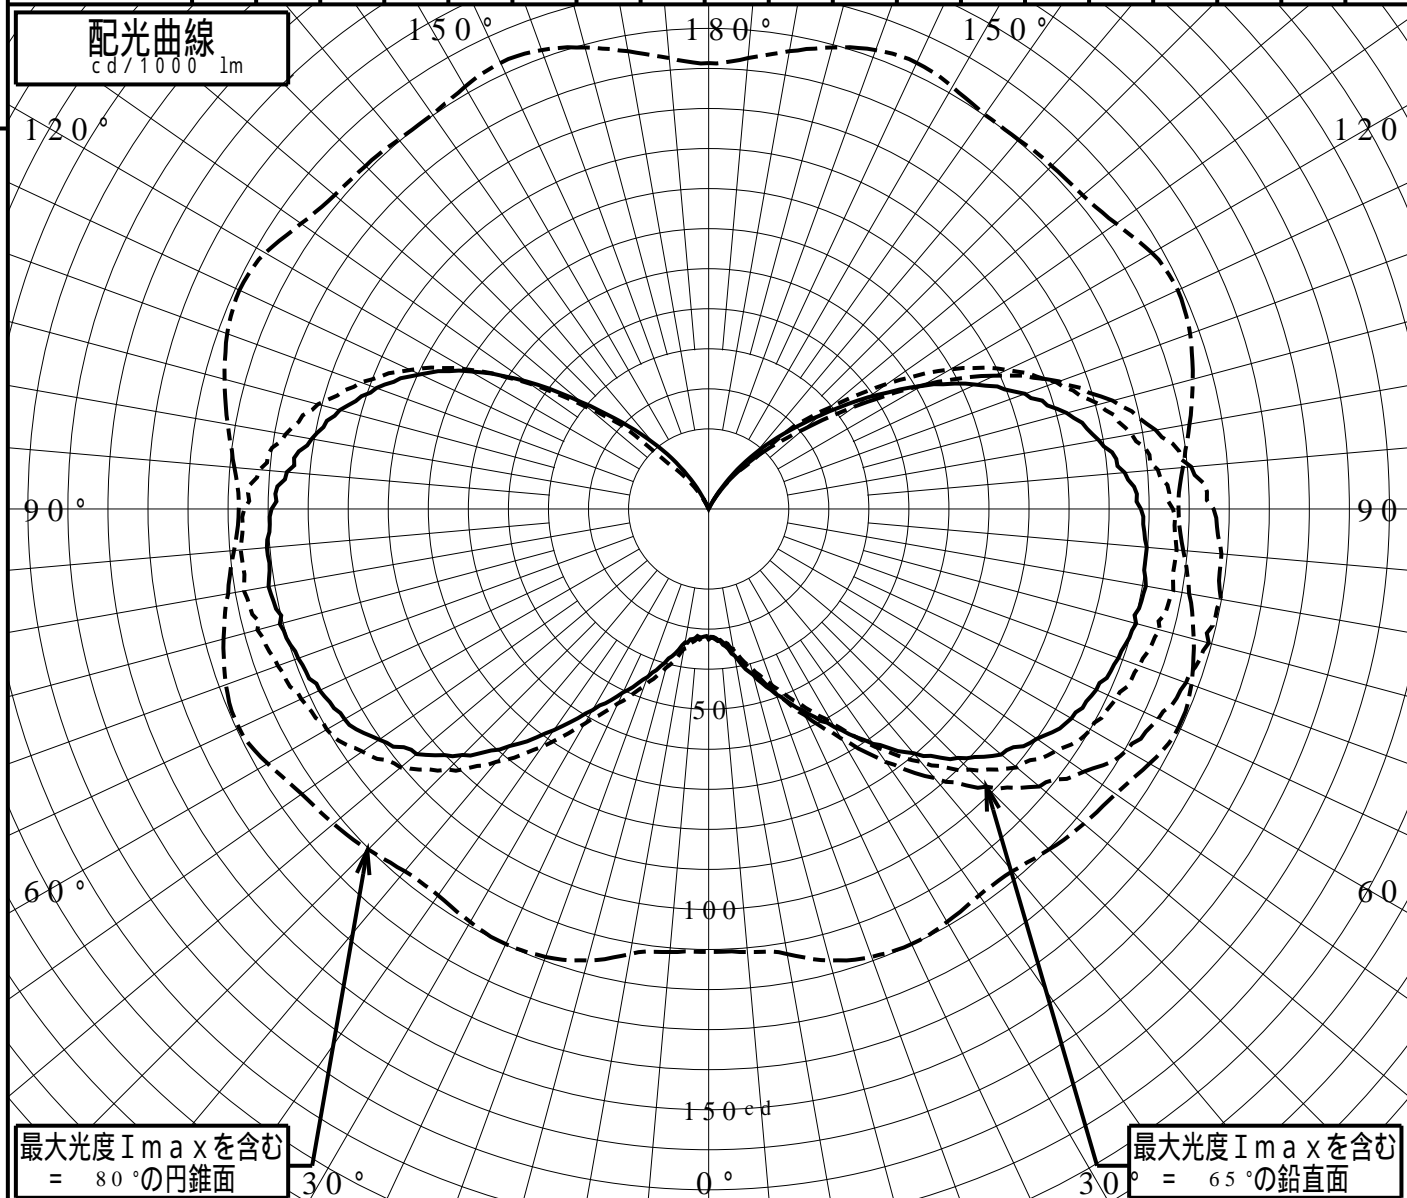

正弦等光度曲線

品番(品名)	XY7616K	光源	LED5000_70_5400 x2
管理番号	K0151451(1)DB 1		

