



投光照明器具特性		
品名（品番）	XND2 5 2 0 WN	
光源	LED5000_85_2430 ×1 2430.0 l m	
管理番号	K0199065(1) DB1 TF	

配光の区分・種類	軸対称配光 広角形	主ビ - ム効率	86.9 %			
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.0 %	ビ - ム効率	80.2%	96.6%	98.4%	
最大光度	627 cd/1000 lm	ビ - ム角	82.9	109.5	118.1	

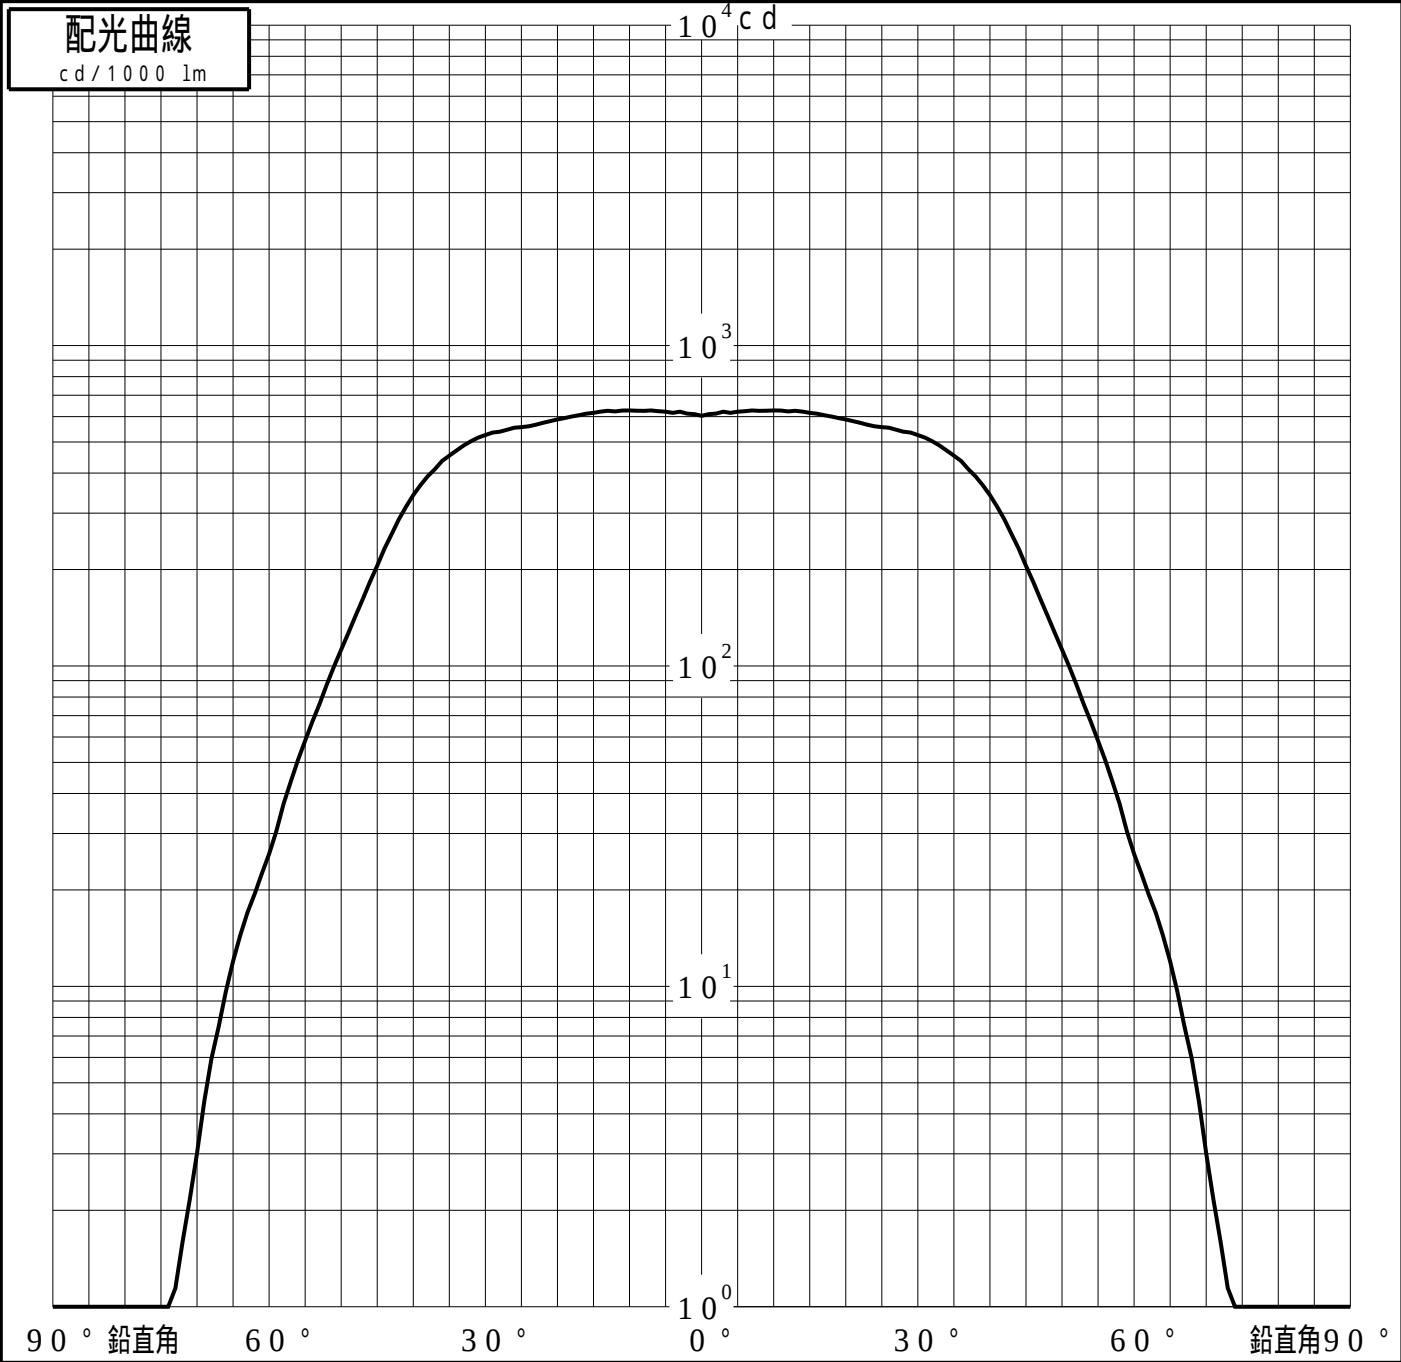

投光照明器具特性

品番(品名)

XND2 5 2 0 WN


光源

LED5000_85_2430 ×1

管理番号


K0199065(1) DB1 TF

累積光束曲線

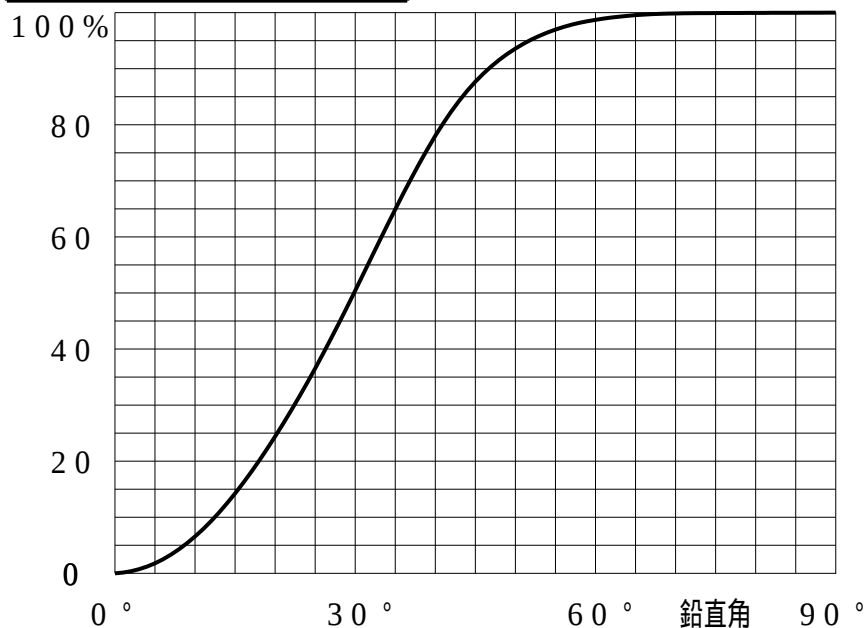

等光度曲線

(αβ座標系)
cd/1000 lm

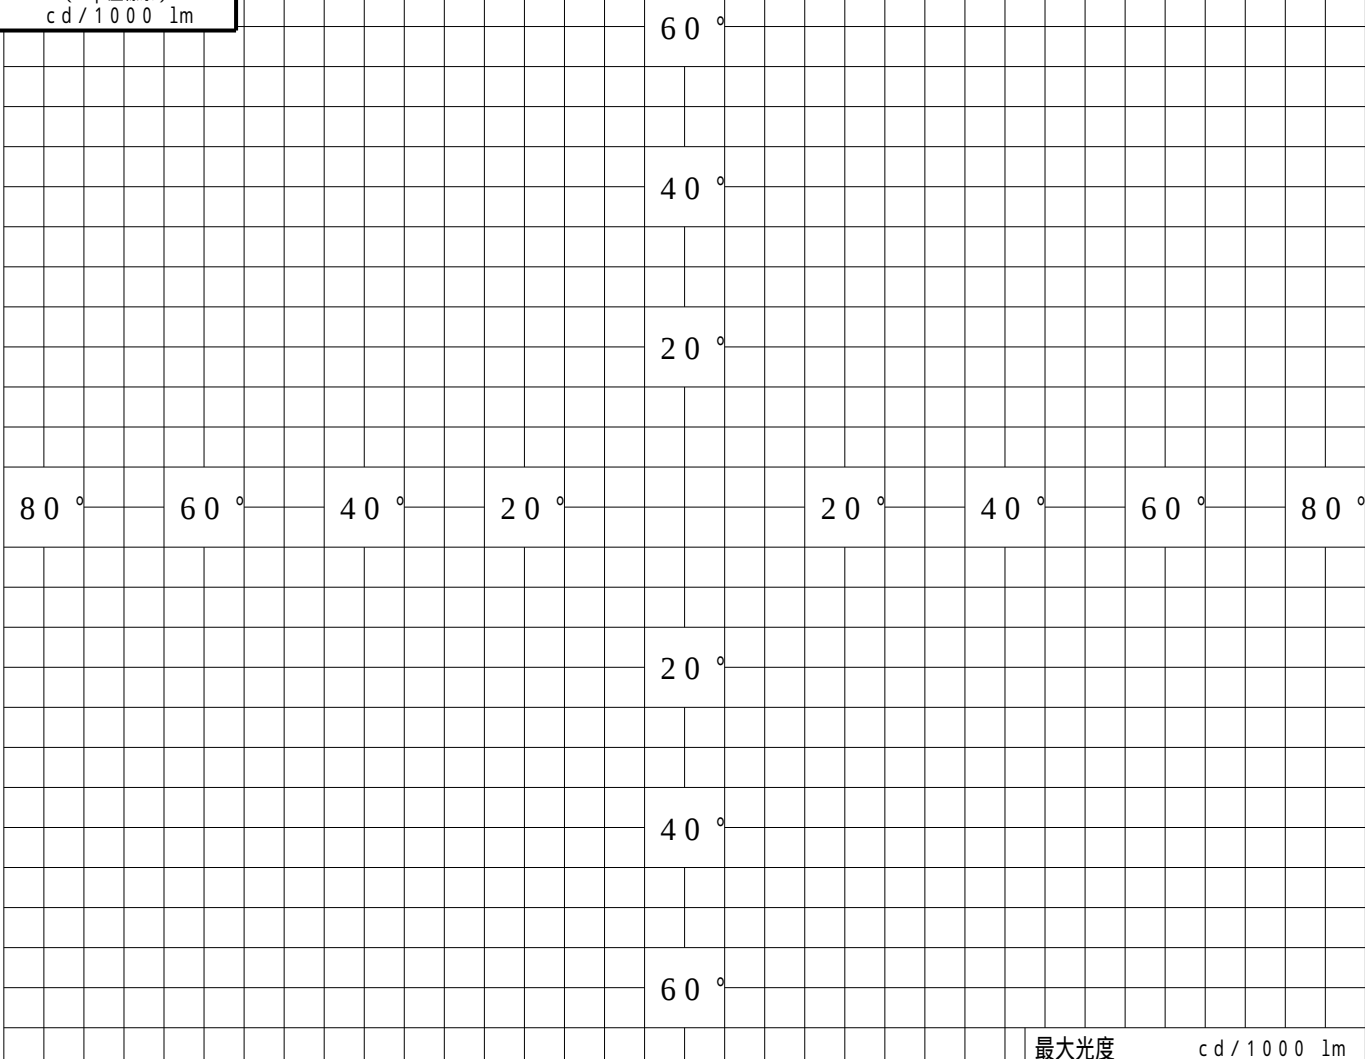

最大光度

cd/1000 lm