


屋外照明器具特性

品番(品名)	YYY86244																			
光源	LED3000_85_190 x1	190.0 lm																		
管理番号	K0172284(0)DB1																			
JISC8131-1999 による配光形式																				
器具効率	99.9%	直下光度	0.0 cd/1000lm																	
上方光束	2.9%	最大光度	1129.4 cd/1000lm																	
下方光束	97.0%																			
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	
=0°鉛直面	0	0	115	329	553	748	930	1059	1124	1110	919	650	317	197	119	78	55	39	24	
90°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
270°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
I _{max} を含む鉛直面	0	0	114	327	550	747	929	1061	1129	1119	931	660	336	203	124	81	57	39	25	

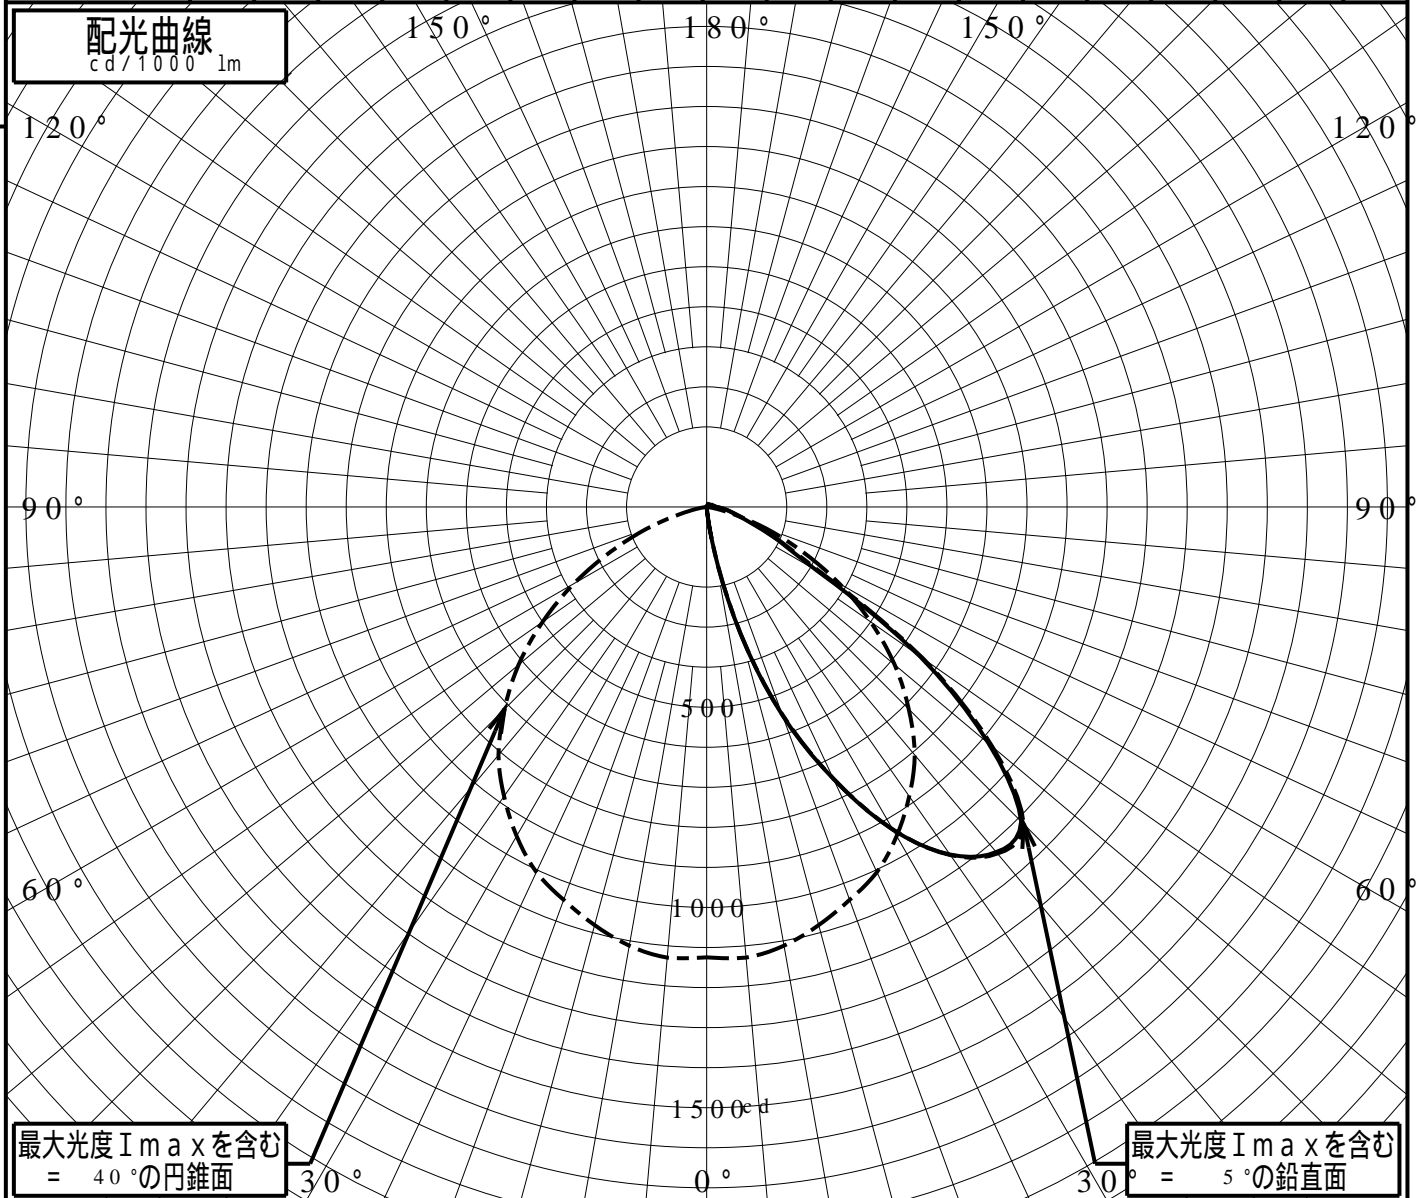

道路・トンネル照明率曲線

品番(品名)

YYY86244

光源

LED3000_85_190 ×1


管理番号

K0172284 (0)DB 1

= 0.0°

H: 取付高さ

照明率(= 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.000	0.004
0.4H	0.000	0.085
0.6H	0.000	0.237
0.8H	0.000	0.407
1.0H	0.000	0.559
1.2H	0.000	0.677
1.4H	0.000	0.760
1.6H	0.000	0.815
1.8H	0.000	0.851
2.0H	0.000	0.874
2.2H	0.000	0.891
2.4H	0.000	0.903
2.6H	0.000	0.912
2.8H	0.000	0.919
3.0H	0.000	0.924
3.2H	0.000	0.929
3.4H	0.000	0.932
3.6H	0.000	0.935

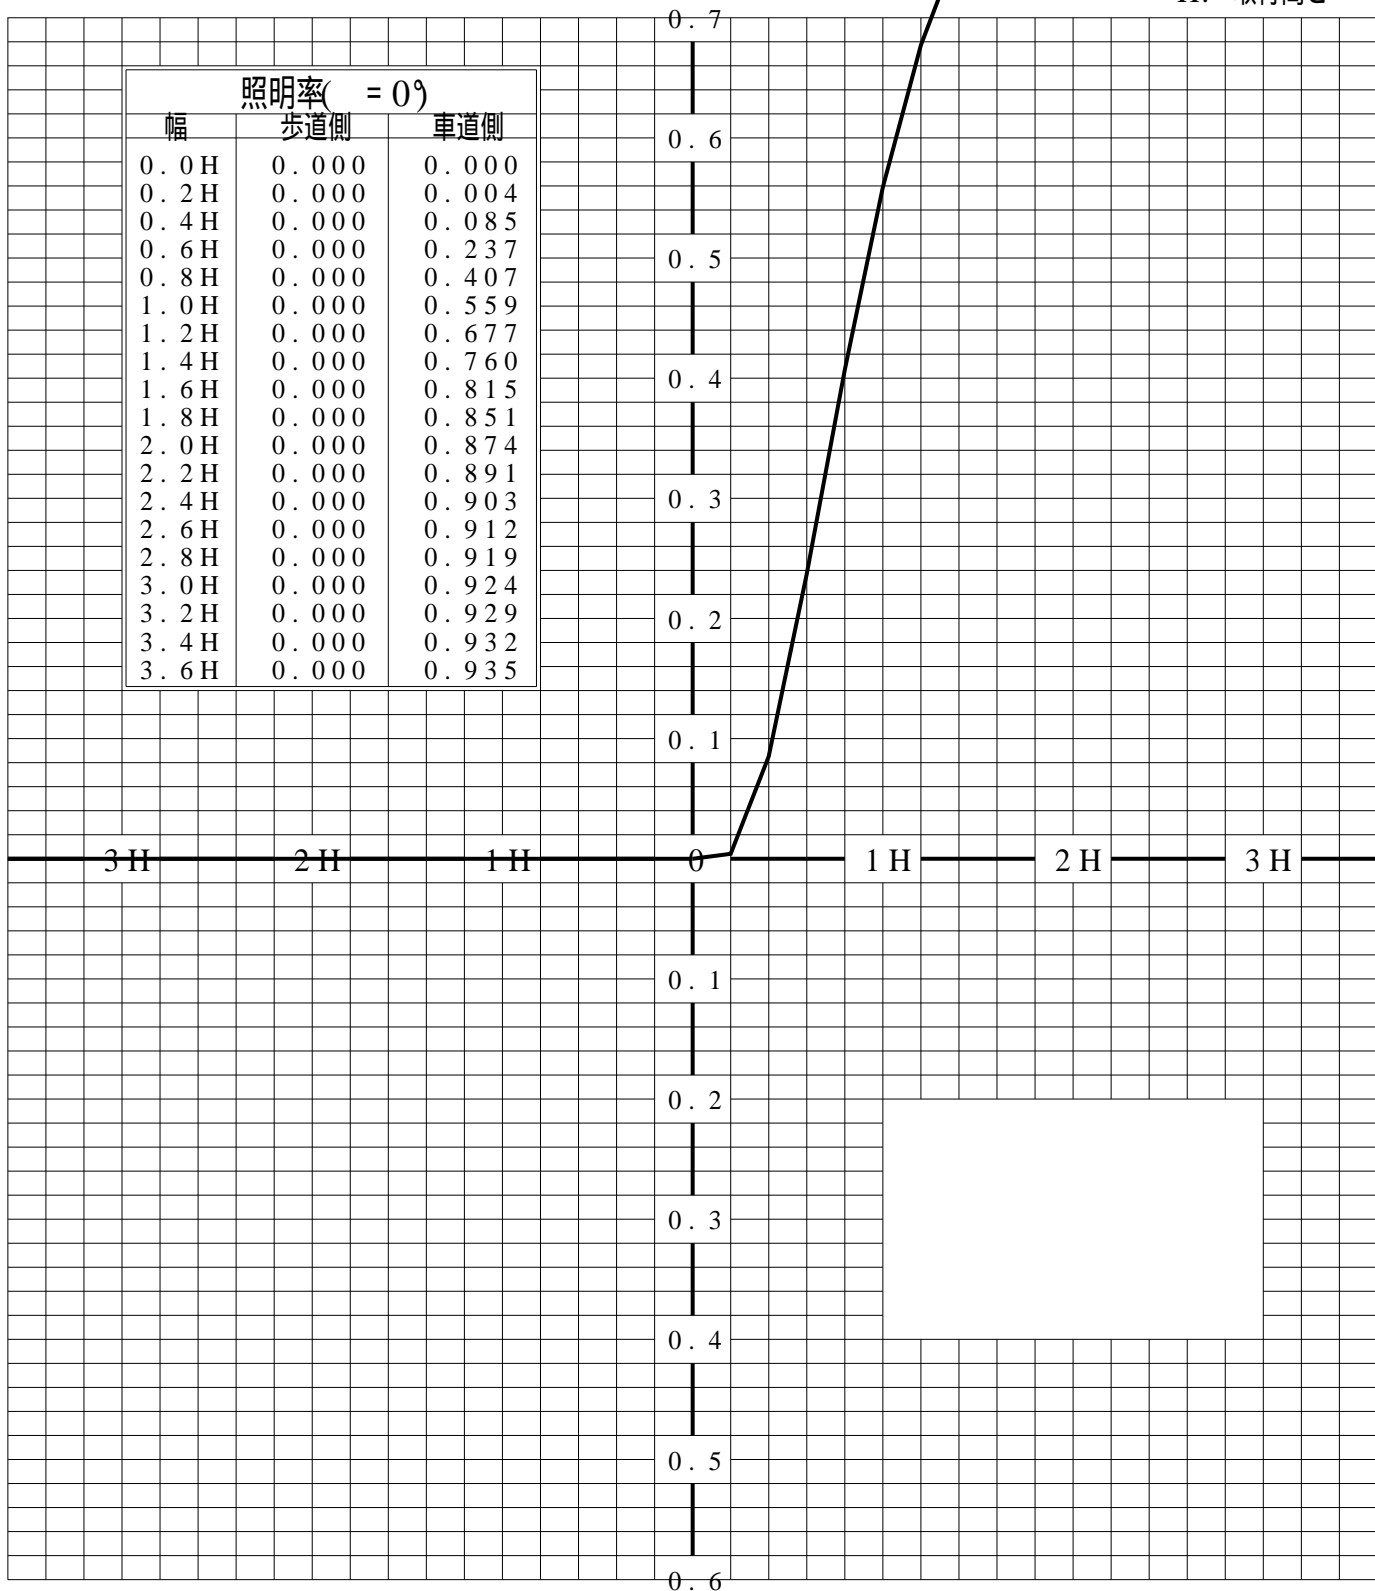

歩道側 ← → 車道側

正弦等光度曲線

品番(品名)	YYY86244	光源	LED3000_85_190 ×1
管理番号	K0172284(0)DB 1		

