


# 屋外照明器具特性

品番(品名)	YYY86542																			
光源	LED4000_85_520 x1	520.0 lm																		
管理番号	K0172284(0)DB1																			
JISC8131-1999 による配光形式																				
器具効率	99.9%	直下光度	0.0 cd/1000lm																	
上方光束	2.9%	最大光度	1129.4 cd/1000lm																	
下方光束	97.0%																			
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	
=0°鉛直面	0	0	115	329	553	748	930	1059	1124	1110	919	650	317	197	119	78	55	39	24	
90°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
270°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
I <sub>max</sub> を含む鉛直面	0	0	114	327	550	747	929	1061	1129	1119	931	660	336	203	124	81	57	39	25	

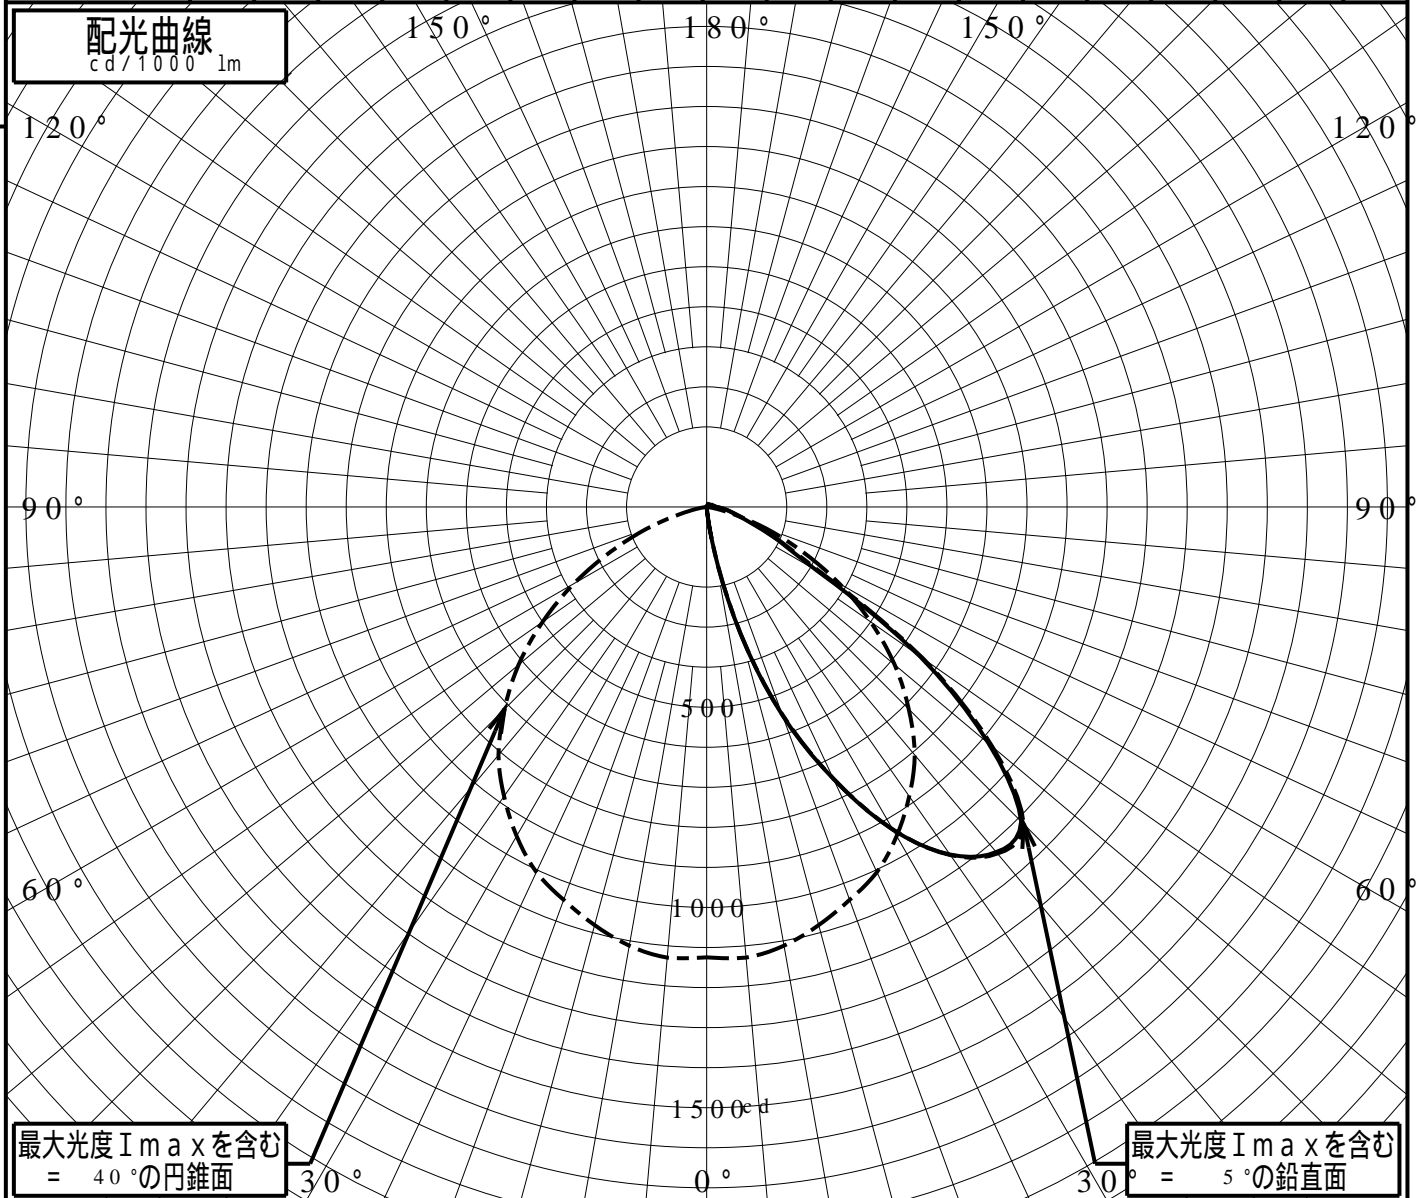

# 道路・トンネル照明率曲線

品番(品名)

YYY86542

光源

LED4000\_85\_520 ×1


管理番号

K0172284 (0)DB 1

= 0.0°

H: 取付高さ

照明率( = 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.000	0.004
0.4H	0.000	0.085
0.6H	0.000	0.237
0.8H	0.000	0.407
1.0H	0.000	0.559
1.2H	0.000	0.677
1.4H	0.000	0.760
1.6H	0.000	0.815
1.8H	0.000	0.851
2.0H	0.000	0.874
2.2H	0.000	0.891
2.4H	0.000	0.903
2.6H	0.000	0.912
2.8H	0.000	0.919
3.0H	0.000	0.924
3.2H	0.000	0.929
3.4H	0.000	0.932
3.6H	0.000	0.935

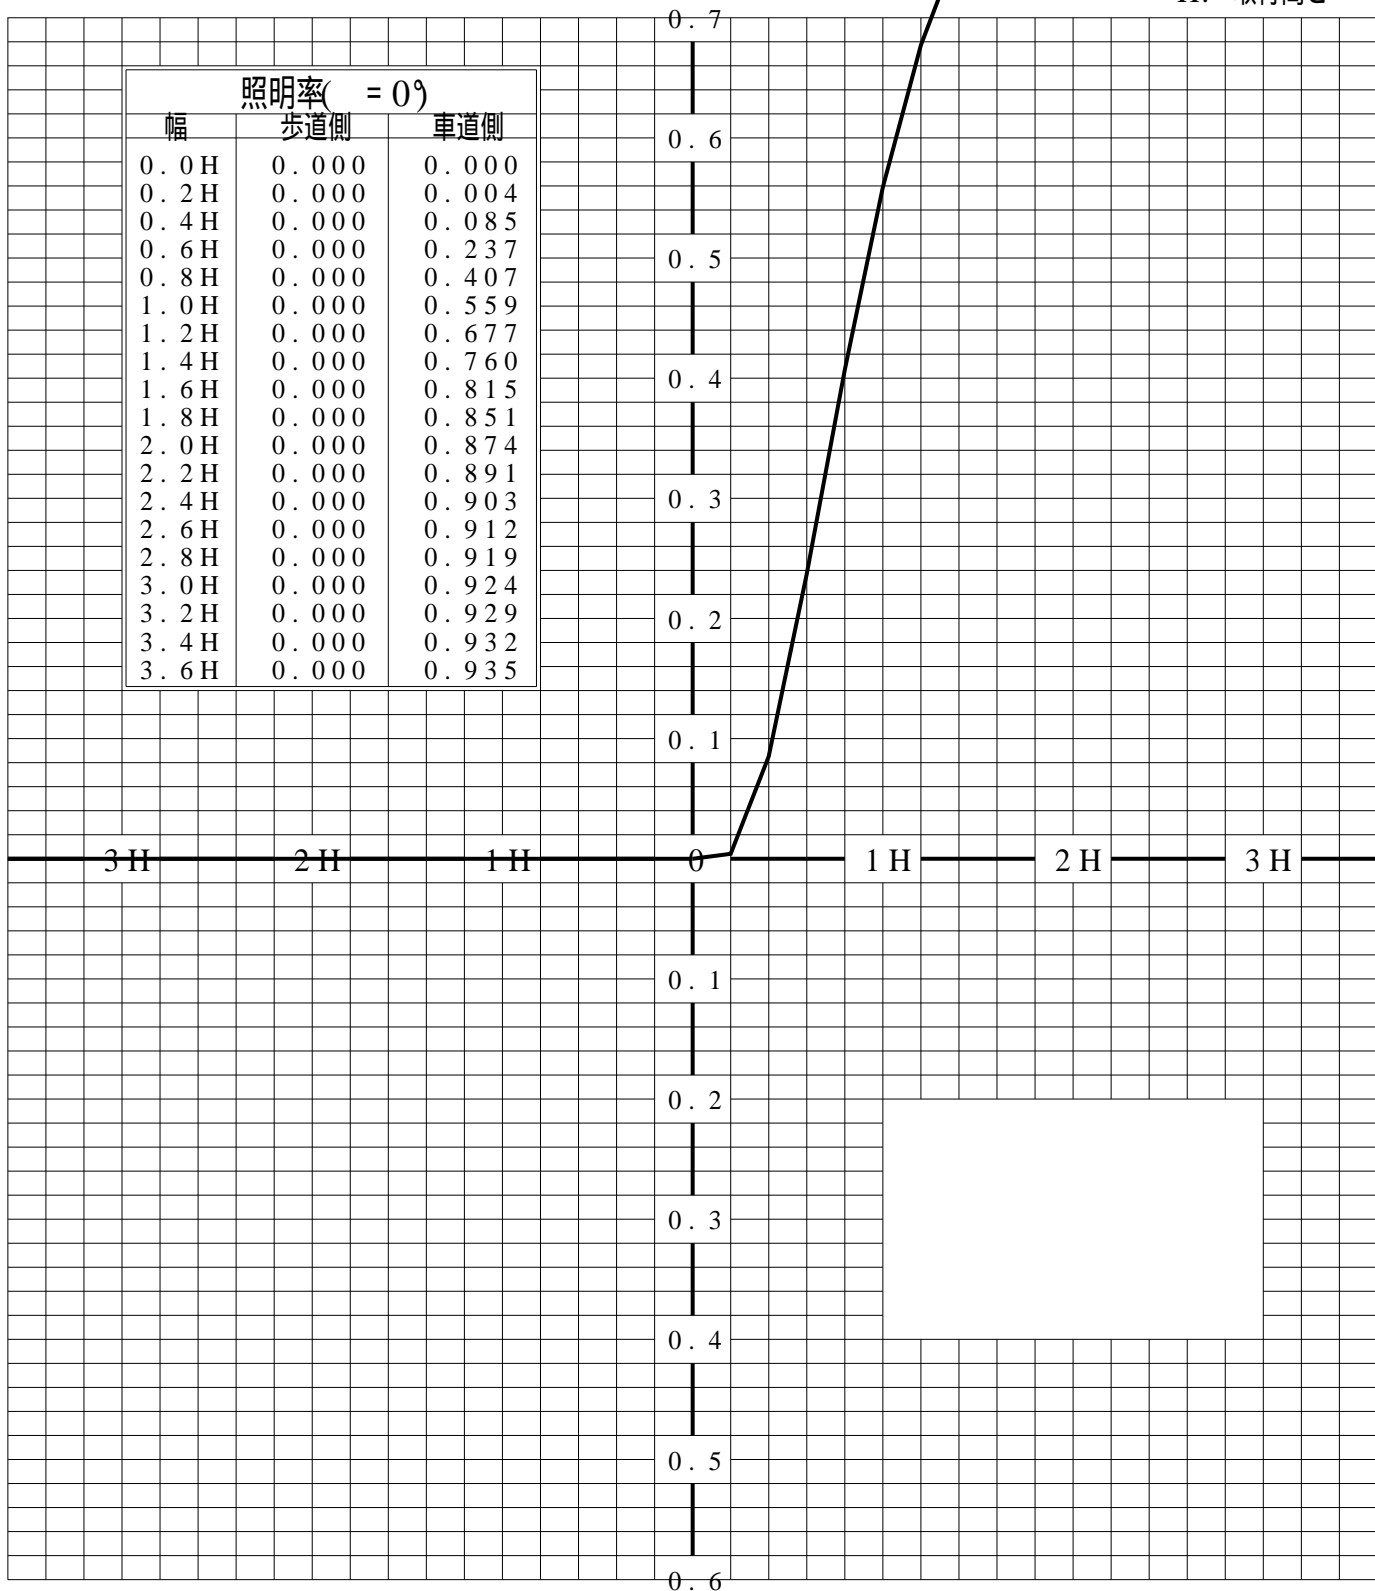

歩道側



車道側

# 正弦等光度曲線

品番(品名)	YYY86542	光源	LED4000_85_520 ×1
管理番号	K0172284(0)DB 1		

