


# 屋外照明器具特性

品番(品名)	YYY80282																			
光源	LED4000_85_180 x1	180.0 lm																		
管理番号	K0172281(0)DB1																			
JISC8131-1999 による配光形式																				
器具効率	99.5%	直下光度	0.0 cd/1000lm																	
上方光束	3.7%	最大光度	1098.0 cd/1000lm																	
下方光束	95.7%																			
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	
=0°鉛直面	0	7175	4076	6047	7739	9101	10361	10981	10778	8736	6042	2891	1800	1127	7855	3925				
90°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
270°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
I <sub>max</sub> を含む鉛直面	0	7175	4076	6047	7739	9101	10361	10981	10778	8736	6042	2891	1800	1127	7855	3925				

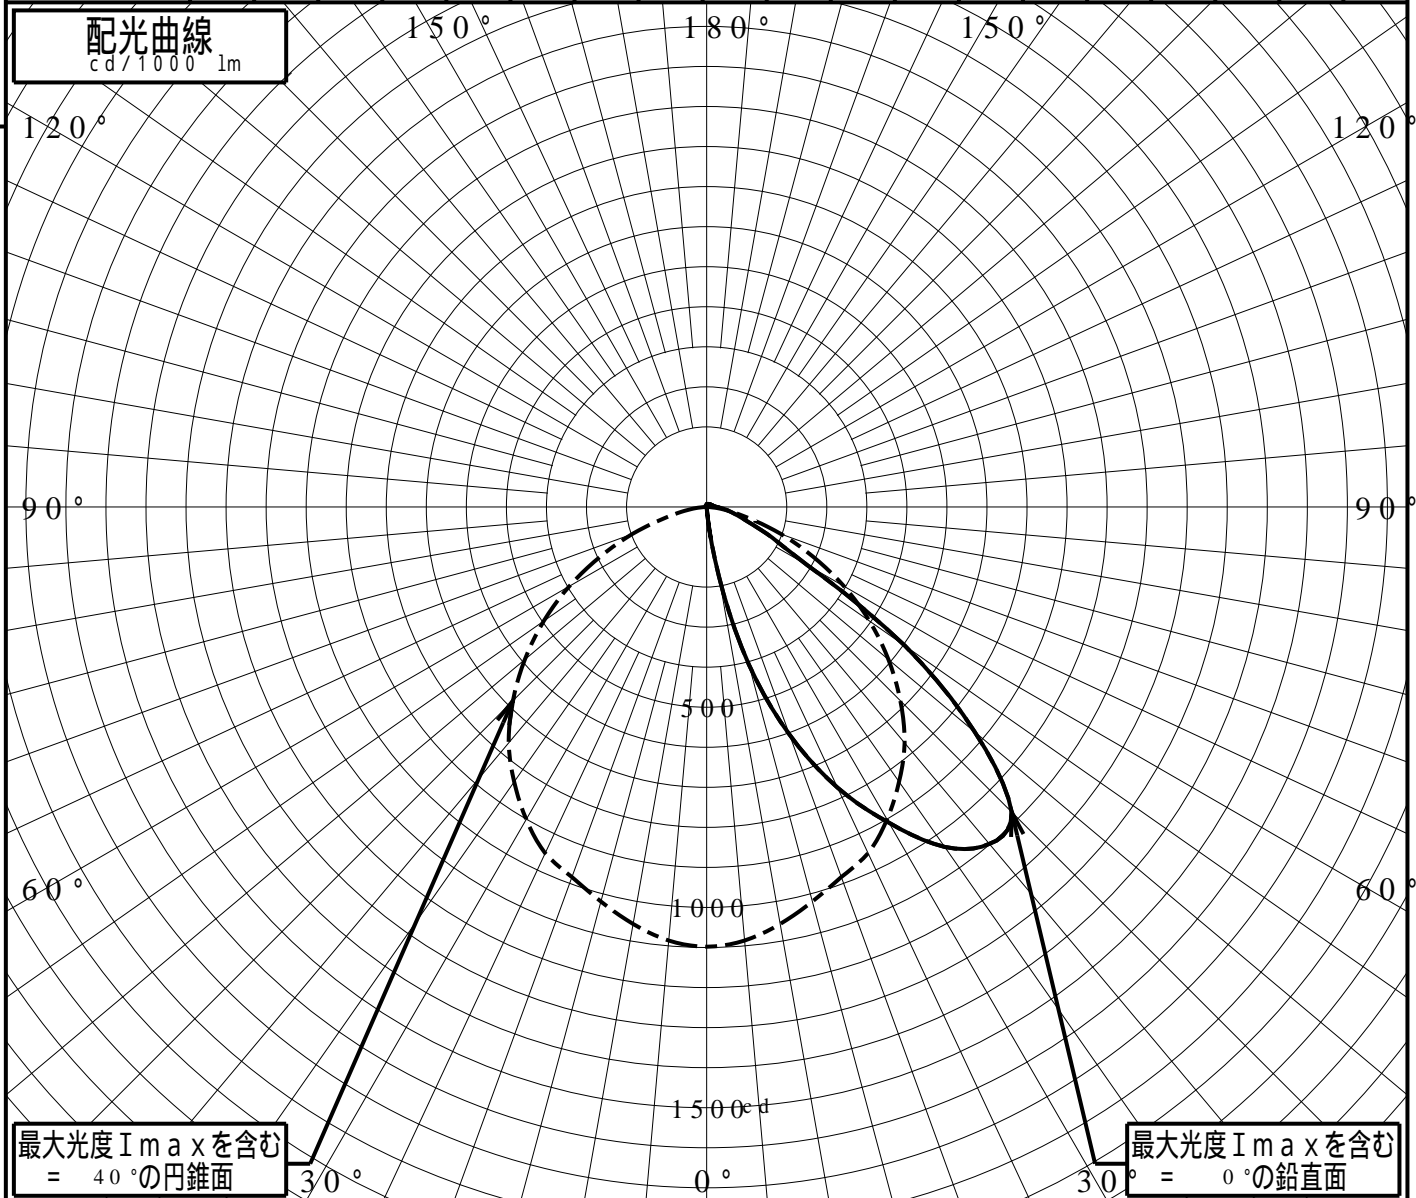

# 道路・トンネル照明率曲線

品番(品名)

YYY80282

光源

LED4000\_85\_180 x1


管理番号

K0172281 (0)DB 1

= 0.0°

H: 取付高さ

照明率( = 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.000	0.013
0.4H	0.000	0.108
0.6H	0.000	0.260
0.8H	0.000	0.424
1.0H	0.000	0.568
1.2H	0.000	0.678
1.4H	0.000	0.755
1.6H	0.000	0.806
1.8H	0.000	0.840
2.0H	0.000	0.862
2.2H	0.000	0.878
2.4H	0.000	0.890
2.6H	0.000	0.899
2.8H	0.000	0.906
3.0H	0.000	0.912
3.2H	0.000	0.916
3.4H	0.000	0.920
3.6H	0.000	0.923

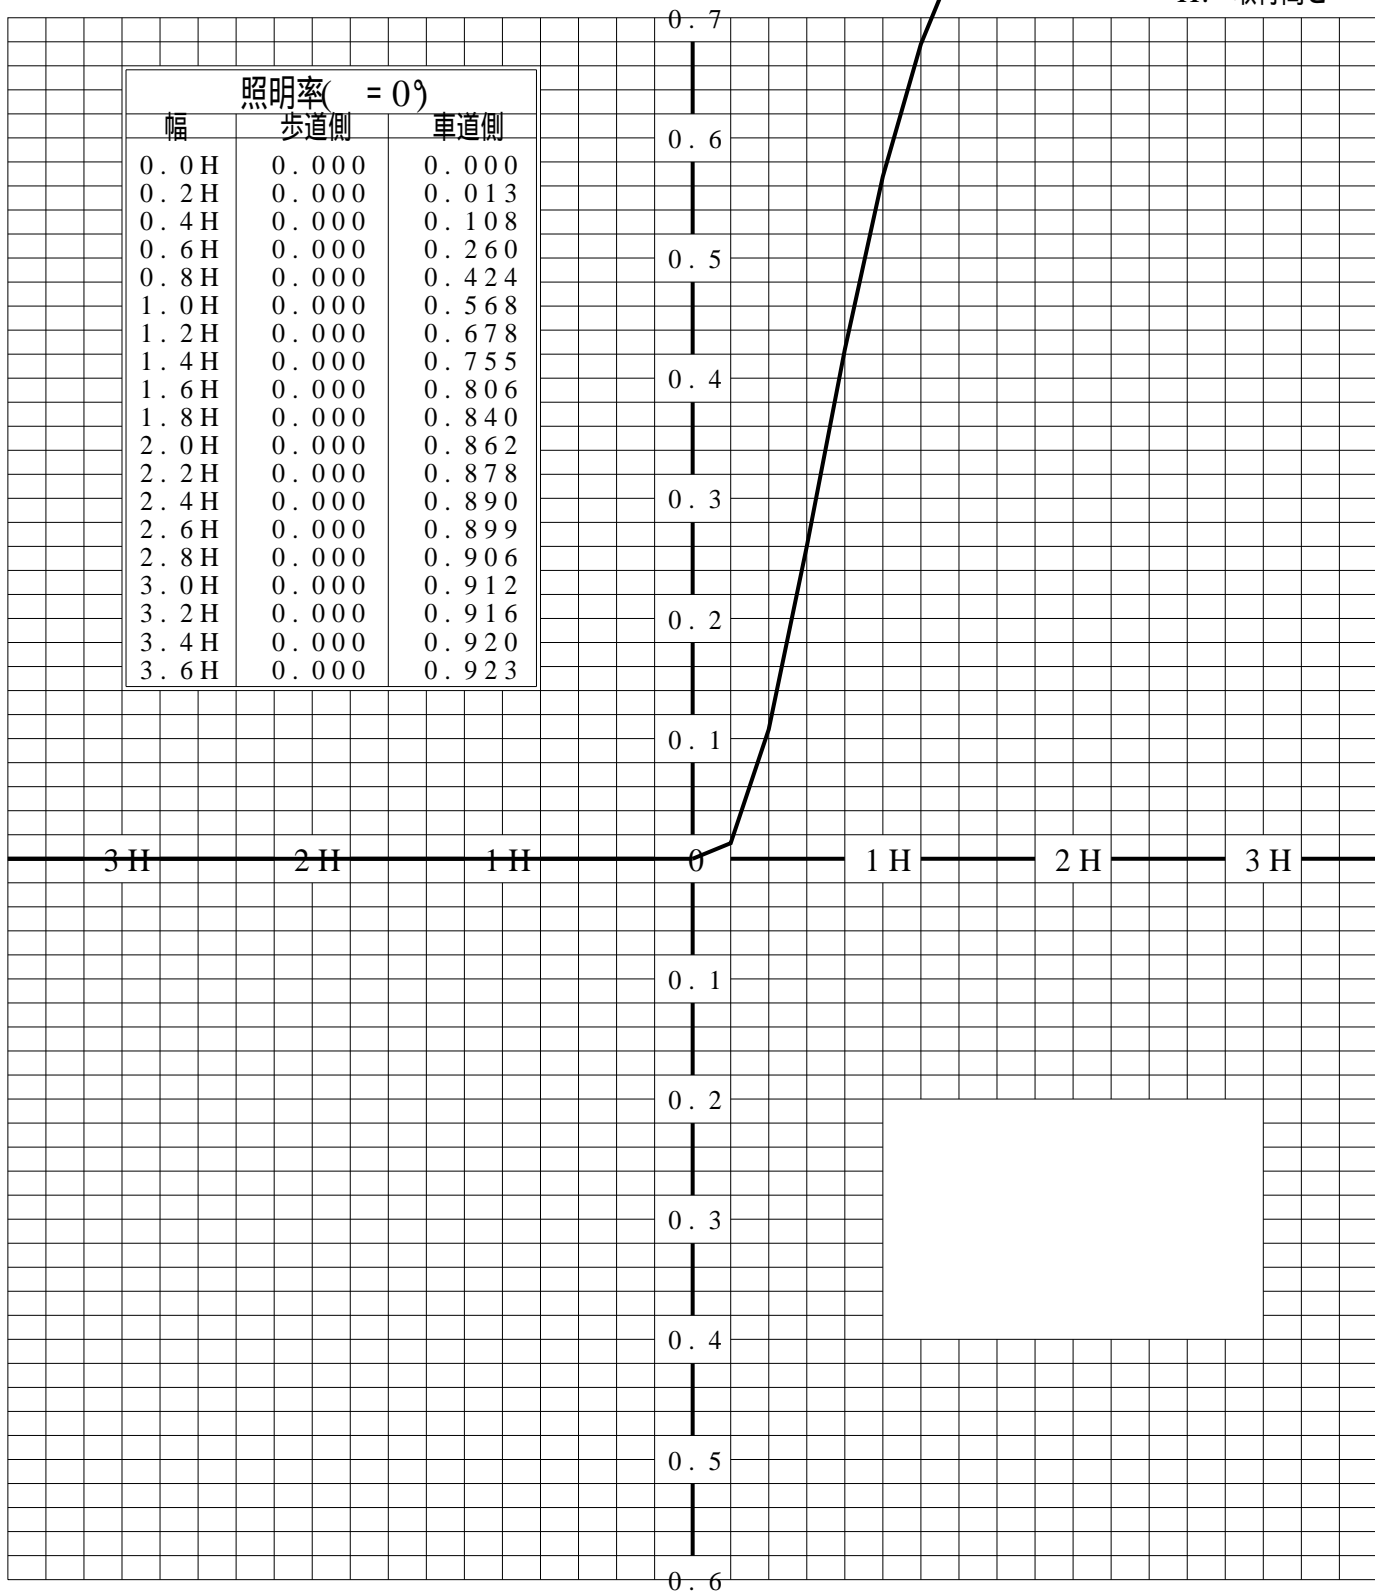

歩道側



車道側

# 正弦等光度曲線

品番(品名)	YYY80282	光源	LED4000_85_180 ×1
管理番号	K0172281(0)DB 1		

