


屋外照明器具特性

品番(品名)	YYY80284																			
光源	LED3000_85_170 x1	170.0 lm																		
管理番号	K0172281(0)DB1																			
JISC8131-1999 による配光形式																				
器具効率	99.5%	直下光度	0.0 cd/1000lm																	
上方光束	3.7%	最大光度	1098.0 cd/1000lm																	
下方光束	95.7%																			
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	
=0°鉛直面	0	7.175	4.07	6.04	7.73	9.10	10.36	10.98	10.77	8.73	6.04	2.89	1.80	1.12	0.78	0.55	0.39	0.25		
90°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
270°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
I _{max} を含む鉛直面	0	7.175	4.07	6.04	7.73	9.10	10.36	10.98	10.77	8.73	6.04	2.89	1.80	1.12	0.78	0.55	0.39	0.25		

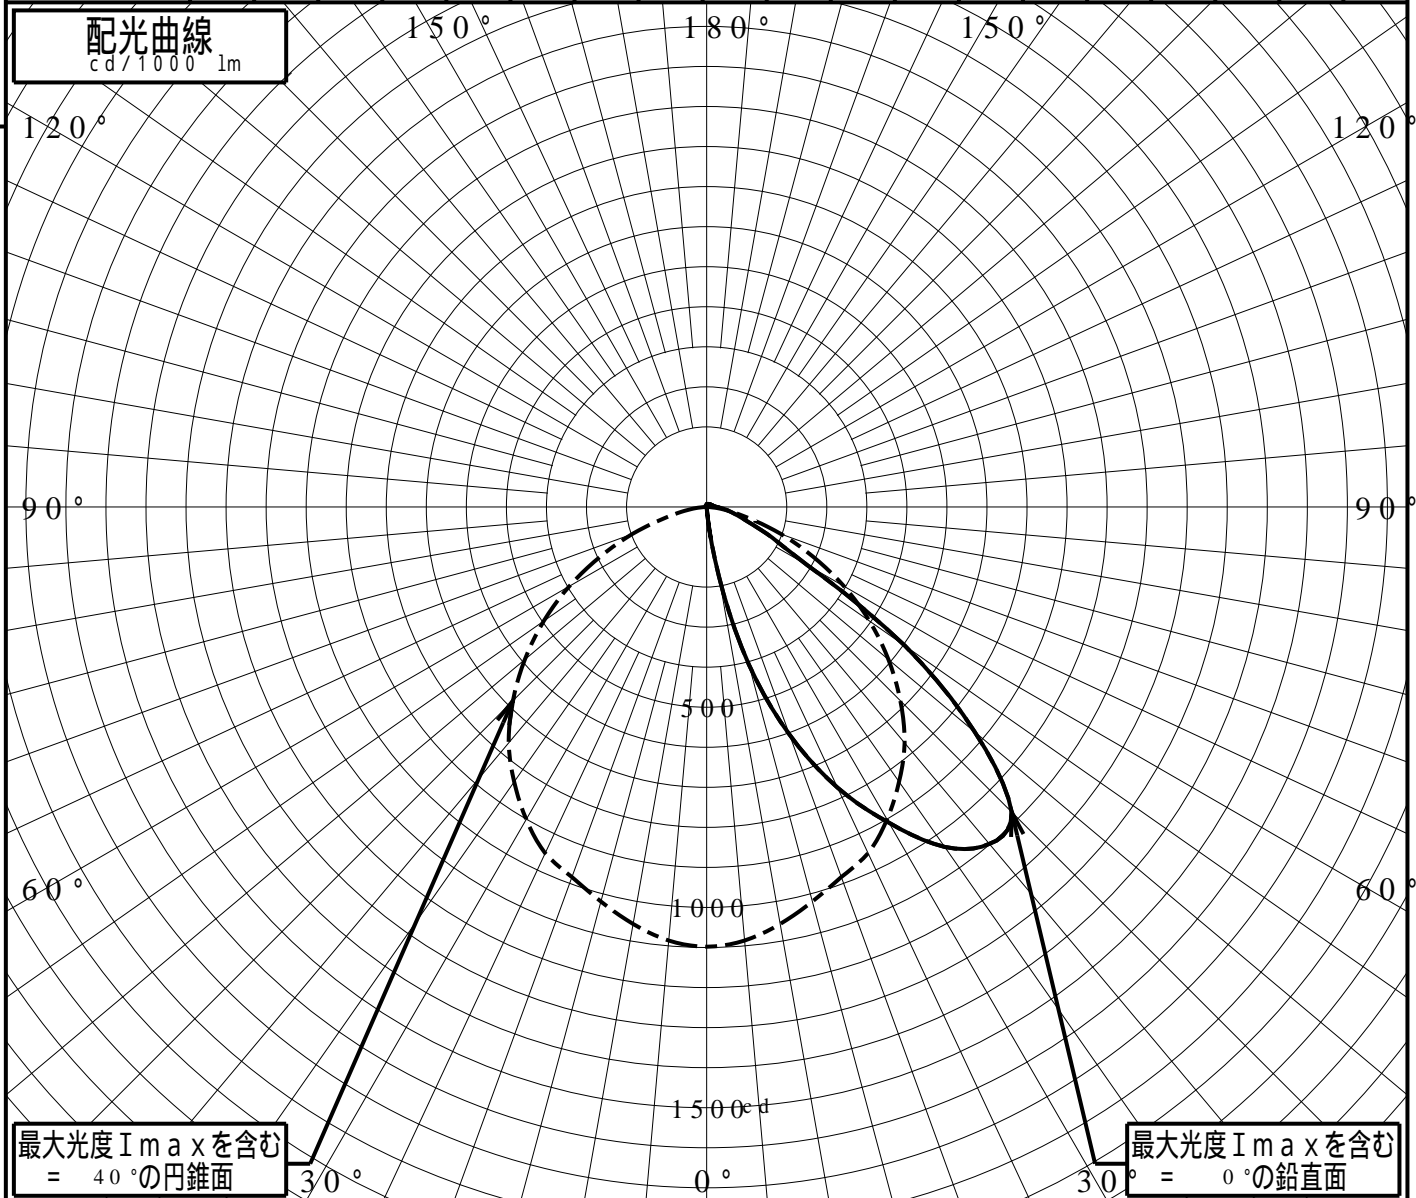

道路・トンネル照明率曲線

品番(品名)

YYY80284

光源

LED3000_85_170 x1


管理番号

K0172281 (0)DB 1

= 0.0°

H: 取付高さ

照明率(= 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.000	0.013
0.4H	0.000	0.108
0.6H	0.000	0.260
0.8H	0.000	0.424
1.0H	0.000	0.568
1.2H	0.000	0.678
1.4H	0.000	0.755
1.6H	0.000	0.806
1.8H	0.000	0.840
2.0H	0.000	0.862
2.2H	0.000	0.878
2.4H	0.000	0.890
2.6H	0.000	0.899
2.8H	0.000	0.906
3.0H	0.000	0.912
3.2H	0.000	0.916
3.4H	0.000	0.920
3.6H	0.000	0.923

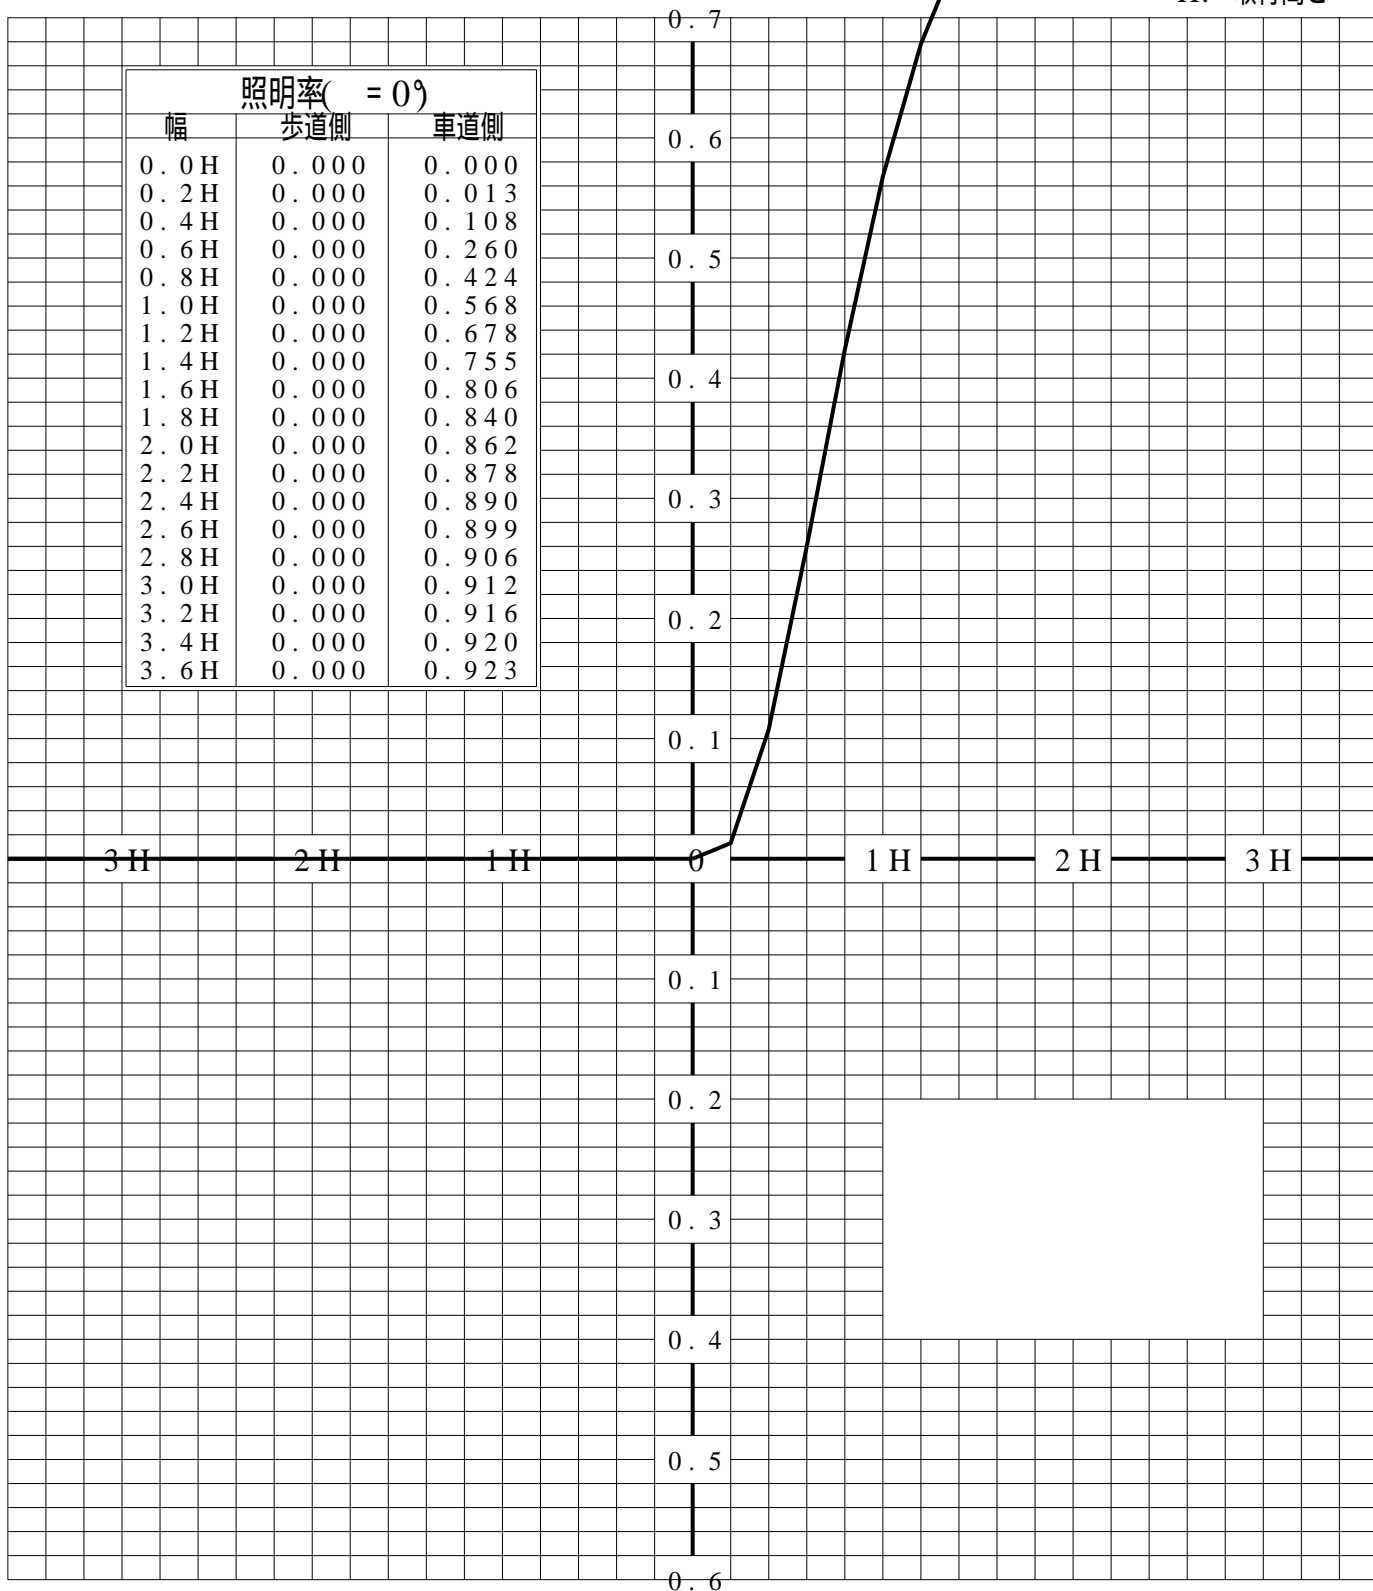

歩道側 ← → 車道側

正弦等光度曲線

品番(品名)	YYY80284	光源	LED3000_85_170 ×1
管理番号	K0172281(0)DB 1		

