


屋外照明器具特性

品番(品名)	YYY81282																			
光源	LED4000_85_190 x1	190.0 lm																		
管理番号	K0172274(0)DB1																			
JISC8131-1999 による配光形式																				
器具効率	100.0%	直下光度	0.4 cd/1000lm																	
上方光束	3.3%	最大光度	866.4 cd/1000lm																	
下方光束	96.7%																			
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	
=0°鉛直面	0	0	52	185	346	515	665	775	842	853	701	487	203	116	66	48	36	26	18	
90°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180°	0	0	55	250	376	468	487	253	186	139	102	70	40	26	16	12	9	8	5	
270°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
I _{max} を含む鉛直面	0	0	52	182	346	518	670	784	853	866	719	502	210	119	67	48	36	26	18	

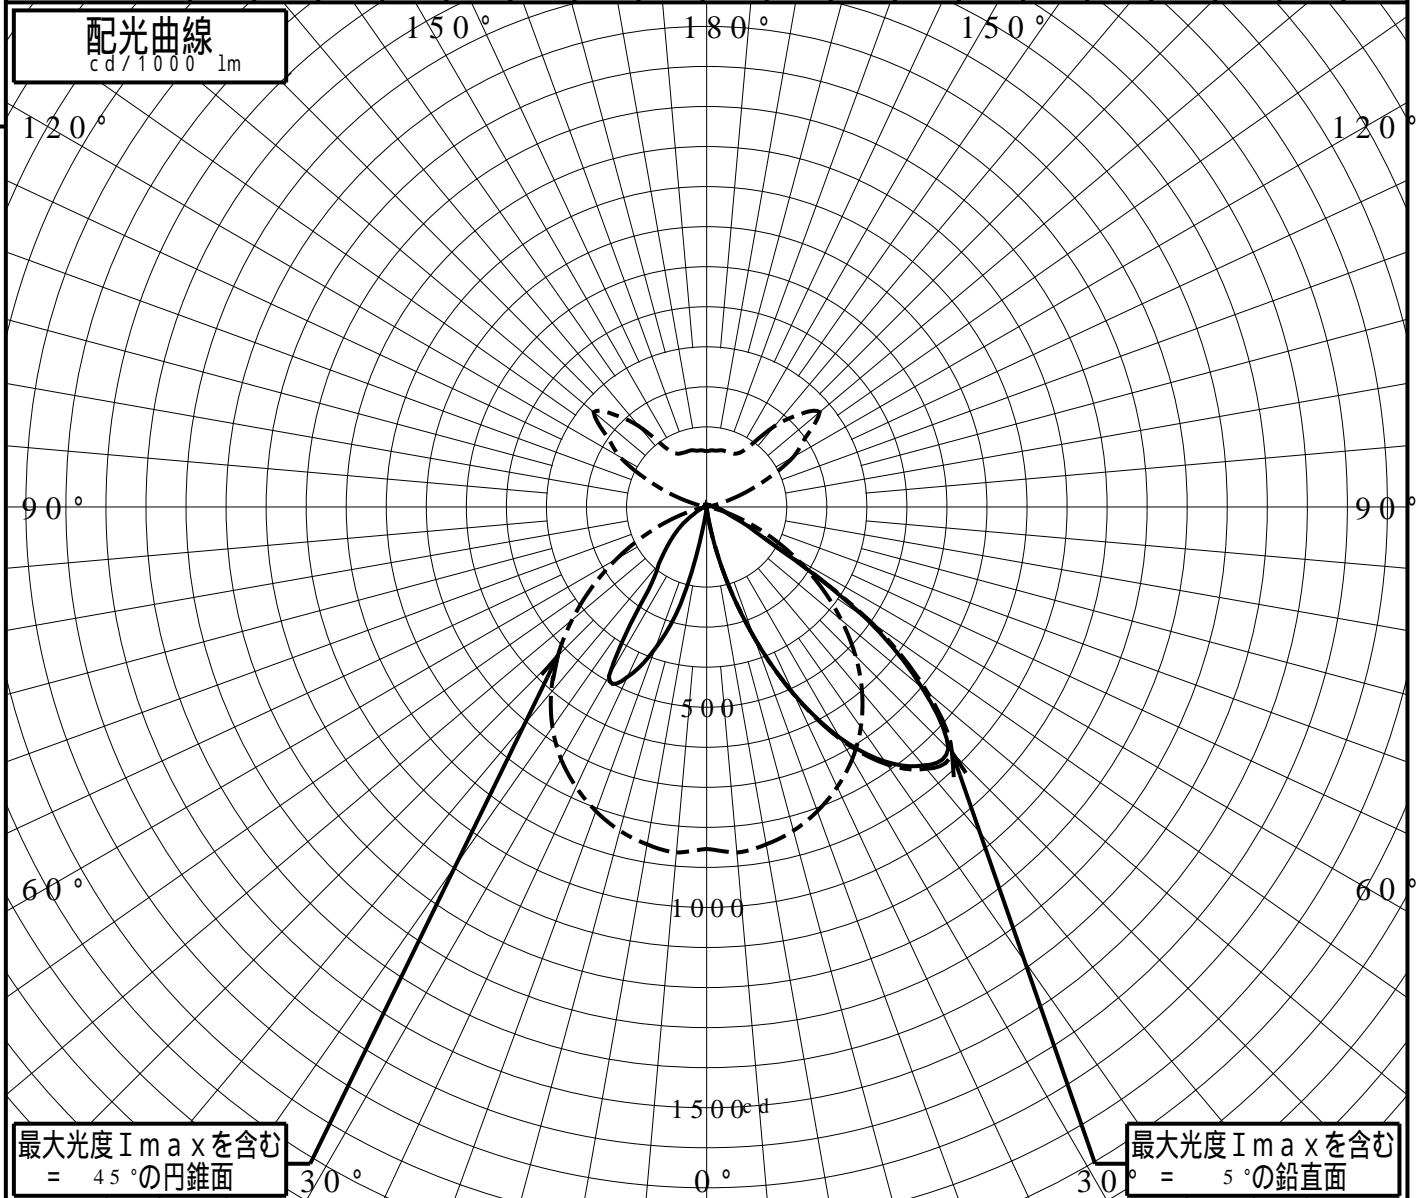


道路・トンネル照明率曲線

品番(品名)	YYY81282	光源	LED4000_85_190 ×1
管理番号	K0172274 (0)DB 1		

————— = 0.0°

H: 取付高さ

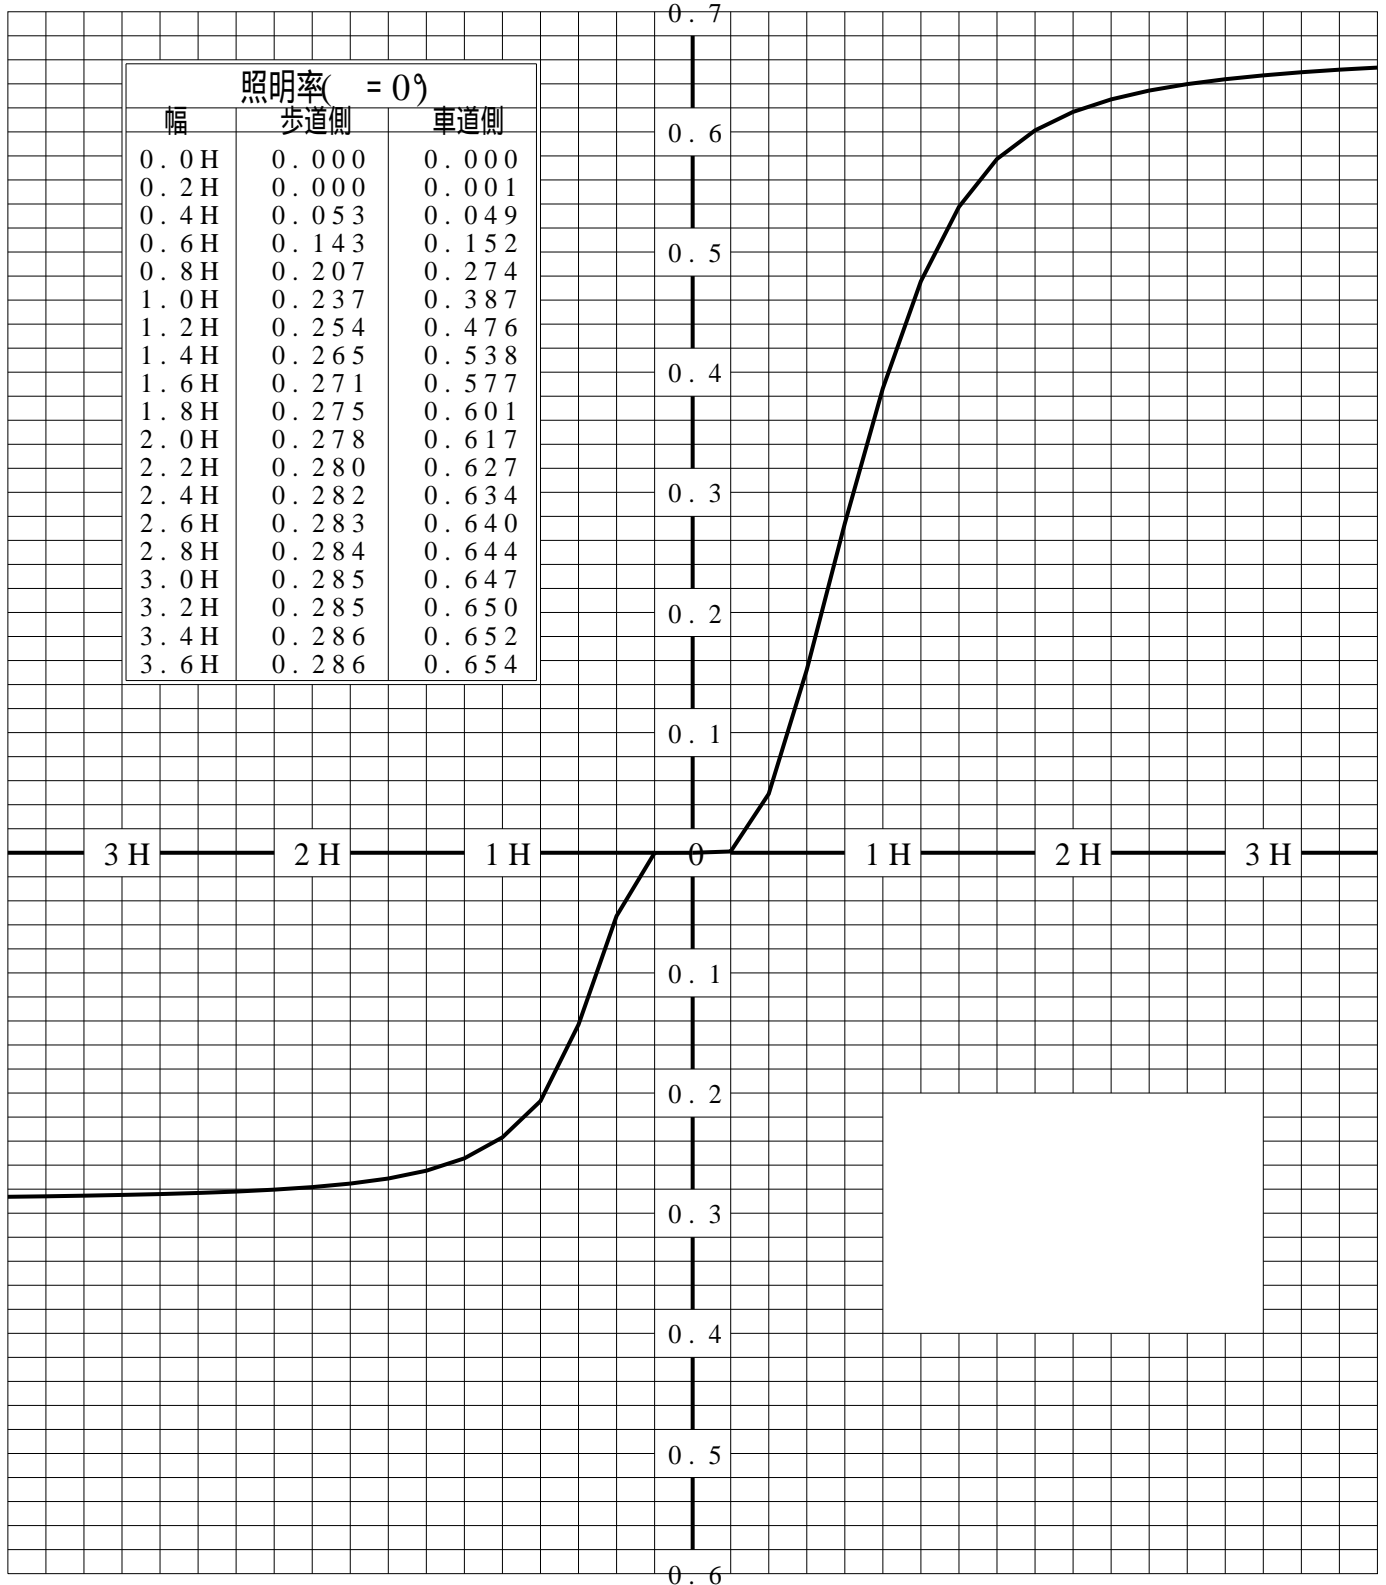

歩道側 ← → 車道側

正弦等光度曲線

品番(品名)	YYY81282	光源	LED4000_85_190 ×1
管理番号	K0172274(0)DB 1		

