


屋外照明器具特性

| | | | | | | | | | | | | | | | | | | | |
|--------------------------|----------------------------|----|------|------|------|------|------|-------|-------|-------|------|------|------|------|------|-----|-----|-----|------------------|
| 品番(品名) | YYY80244 | | | | | | | | | | | | | | | | | | |
| 光源 | LED3000_85_170 x1 170.0 lm | | | | | | | | | | | | | | | | | | |
| 管理番号 | K0172281(0)DB1 | | | | | | | | | | | | | | | | | | |
| JISC8131-1999 による配光形式 | | | | | | | | | | | | | | | | | | | |
| 器具効率 上方光束 下方光束 | 99.5% | | | | | | | | | 直下光度 | | | | | | | | | 0.0 cd/1000lm |
| | 3.7% | | | | | | | | | 最大光度 | | | | | | | | | 1098.0 cd/1000lm |
| 鉛直角 | 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° |
| =0°鉛直面 | 0 | 7 | 17.5 | 40.7 | 60.4 | 77.3 | 91.0 | 103.6 | 109.8 | 107.7 | 87.3 | 60.4 | 28.9 | 18.0 | 11.2 | 7.8 | 5.5 | 3.9 | 2.5 |
| 90° | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 180° | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 270° | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| I _{max} を含む鉛直面 | 0 | 7 | 17.5 | 40.7 | 60.4 | 77.3 | 91.0 | 103.6 | 109.8 | 107.7 | 87.3 | 60.4 | 28.9 | 18.0 | 11.2 | 7.8 | 5.5 | 3.9 | 2.5 |

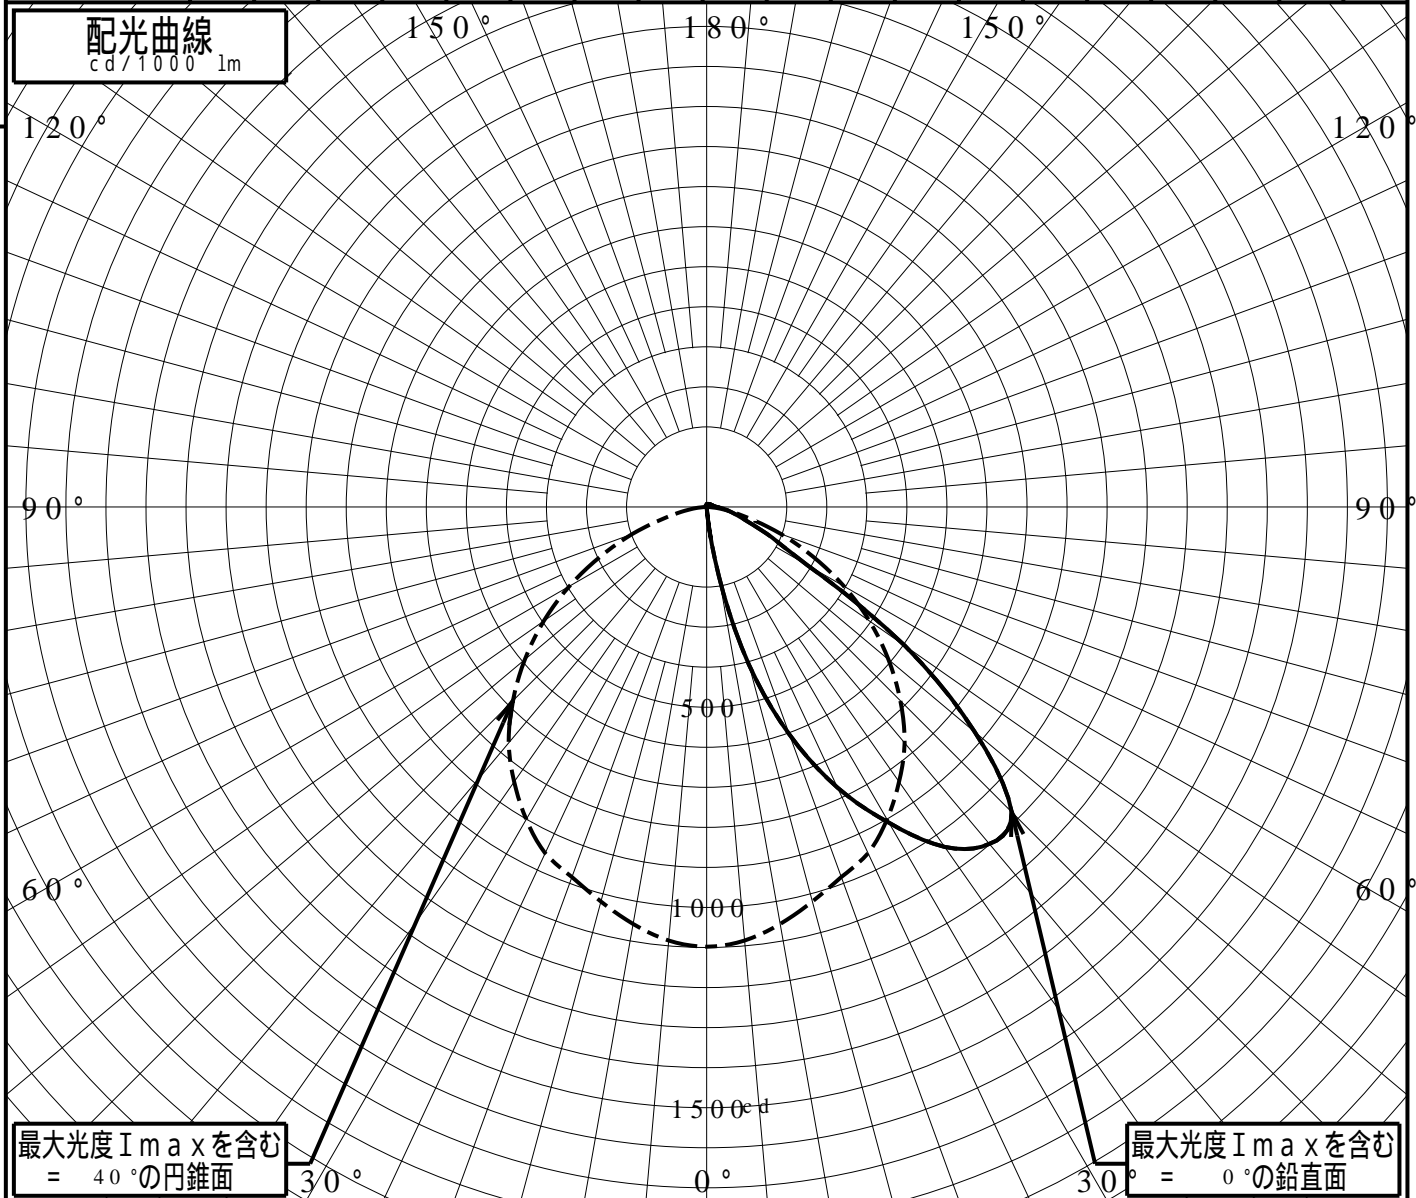

道路・トンネル照明率曲線

品番(品名)

YYY80244

光源

LED3000_85_170 x1


管理番号

K0172281 (0)DB 1

= 0.0°

H: 取付高さ

| 照明率(= 0°) | | |
|------------|-------|-------|
| 幅 | 歩道側 | 車道側 |
| 0.0H | 0.000 | 0.000 |
| 0.2H | 0.000 | 0.013 |
| 0.4H | 0.000 | 0.108 |
| 0.6H | 0.000 | 0.260 |
| 0.8H | 0.000 | 0.424 |
| 1.0H | 0.000 | 0.568 |
| 1.2H | 0.000 | 0.678 |
| 1.4H | 0.000 | 0.755 |
| 1.6H | 0.000 | 0.806 |
| 1.8H | 0.000 | 0.840 |
| 2.0H | 0.000 | 0.862 |
| 2.2H | 0.000 | 0.878 |
| 2.4H | 0.000 | 0.890 |
| 2.6H | 0.000 | 0.899 |
| 2.8H | 0.000 | 0.906 |
| 3.0H | 0.000 | 0.912 |
| 3.2H | 0.000 | 0.916 |
| 3.4H | 0.000 | 0.920 |
| 3.6H | 0.000 | 0.923 |

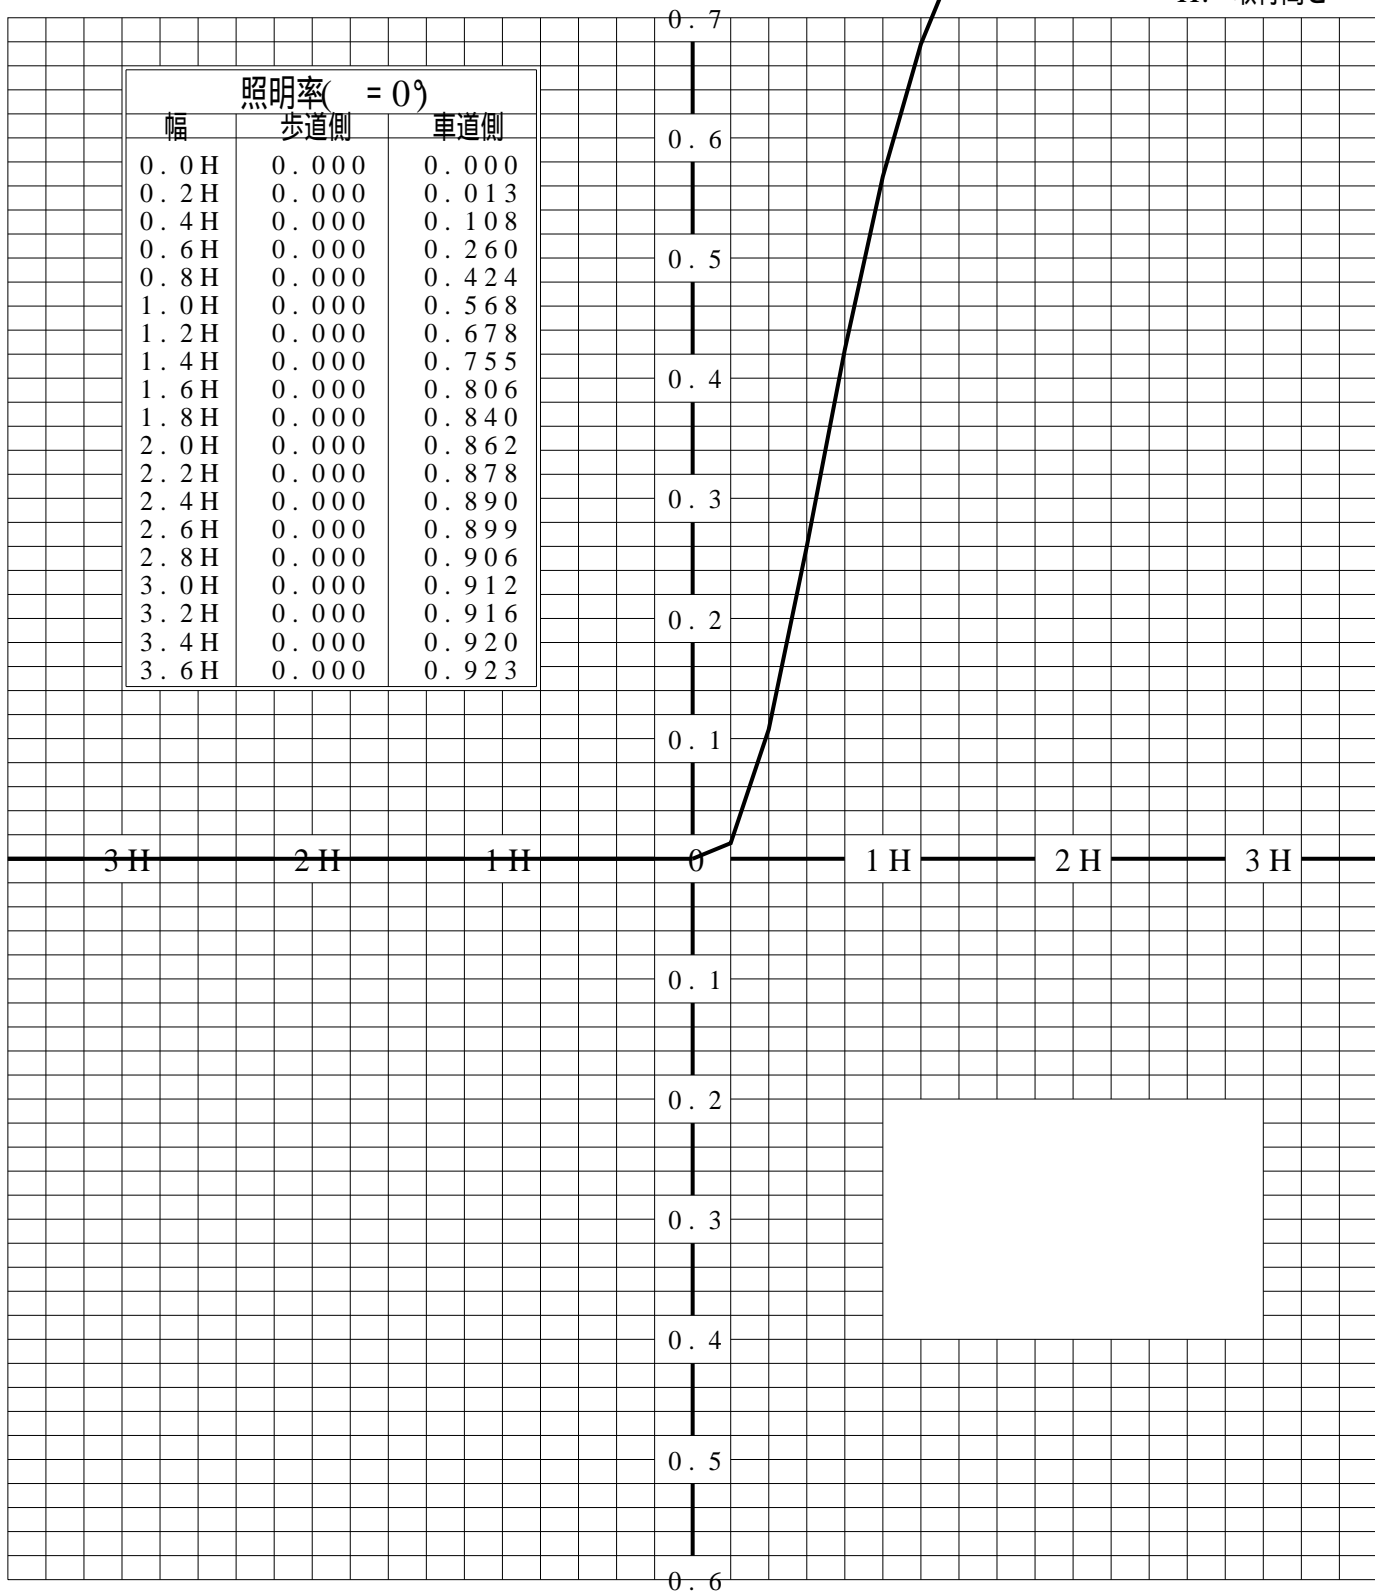

歩道側 ← → 車道側

