



投光照明器具特性					
品名 (品番)	YYY3 1 1 2 4 + YYY9 5 0 6 1				
光源	LED3000_70_1135 ×1 1135.0 lm				
管理番号	K0172184(0)DJ1 XY				



配光の区分・種類	非対称配光	主ビ - ム効率	%			
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.0 %	ビ - ム効率	34.9%	90.6%	94.6%	
最大光度	4857 cd/1000 lm	ビ - ム角 AA' 20.5 BB' 20.3				

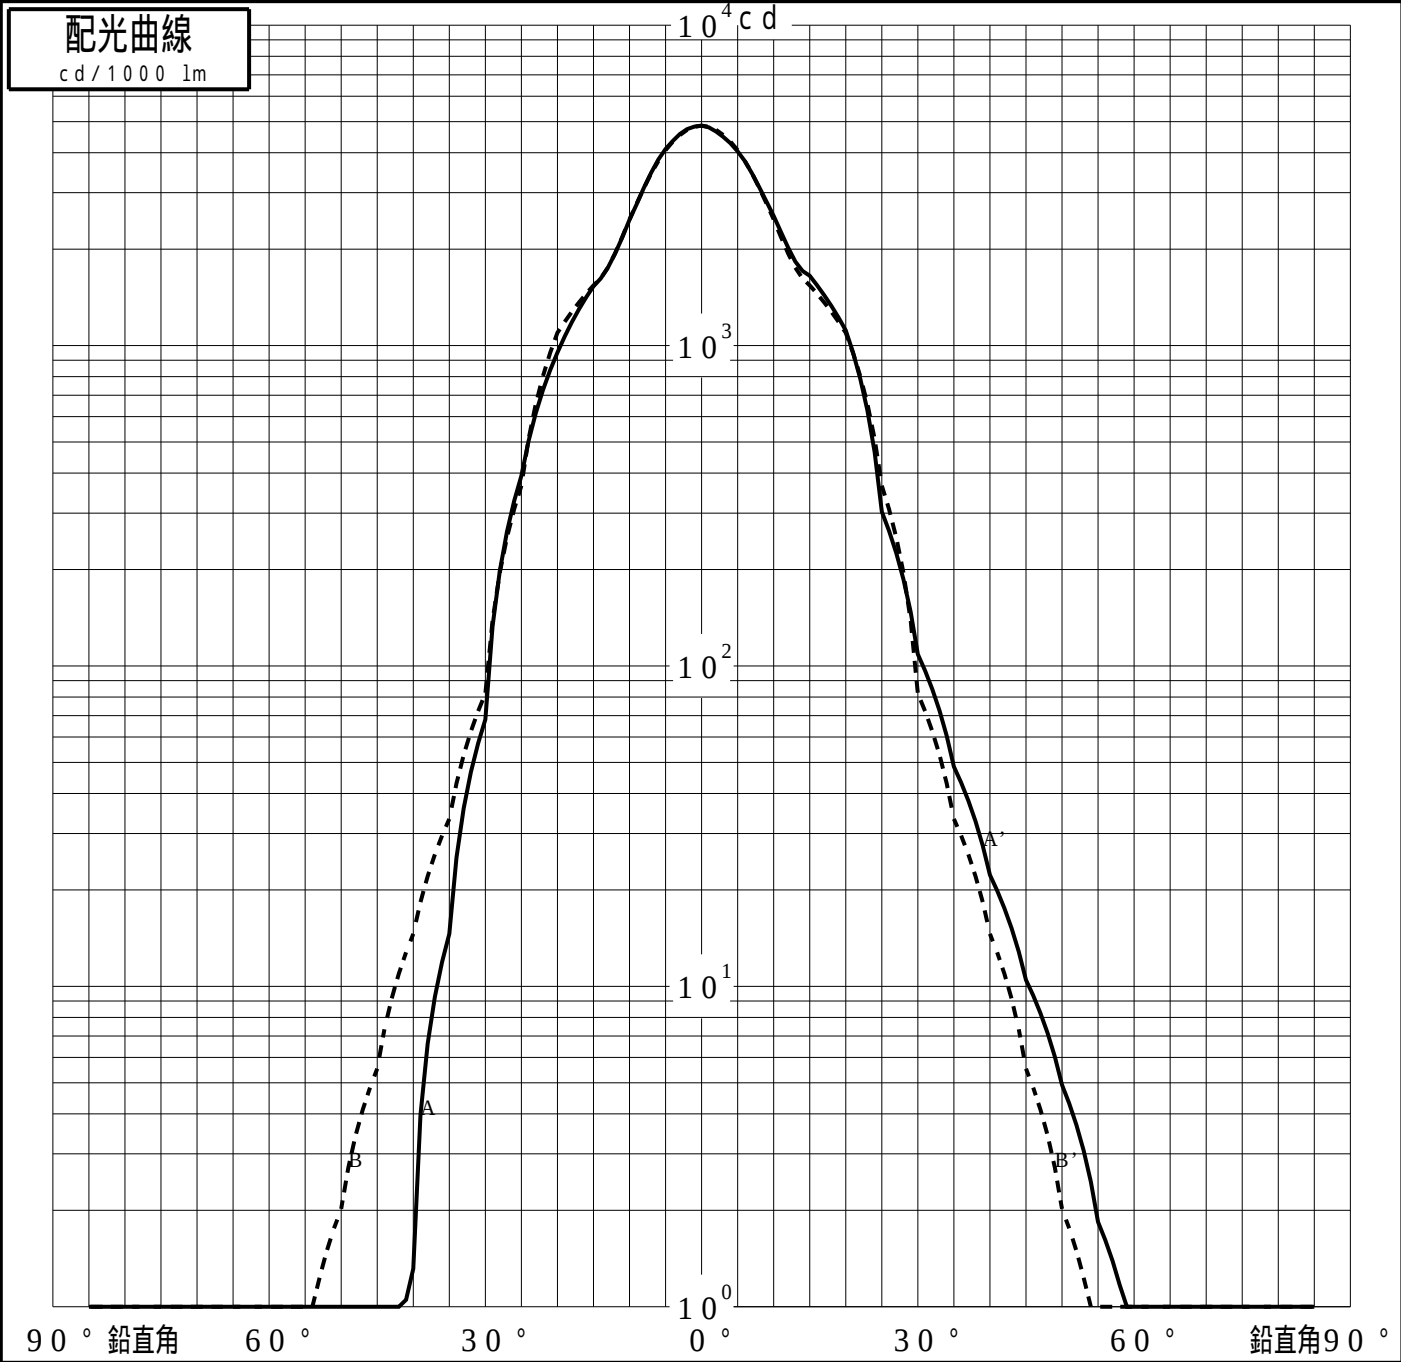

投光照明器具特性

品番 (品名)	YYY3 1 1 2 4 + YYY9 5 0 6 1	光源	LED3 0 0 0 _ 7 0 _ 1 1 3 5 × 1
管理番号	K0 1 7 2 1 8 4 (0) DJ 1 XY		

累積光束曲線

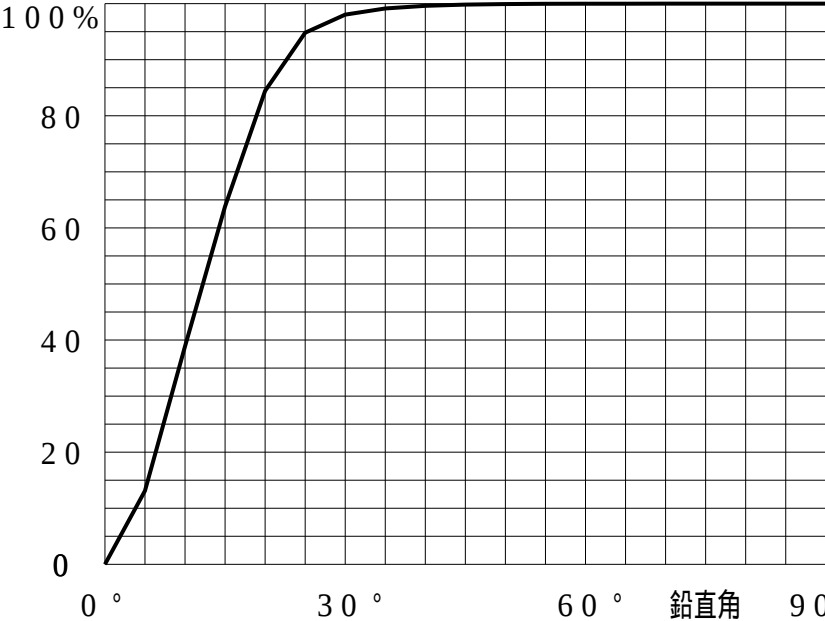

等光度曲線

(α β 座標系)
cd / 1 0 0 0 lm

