
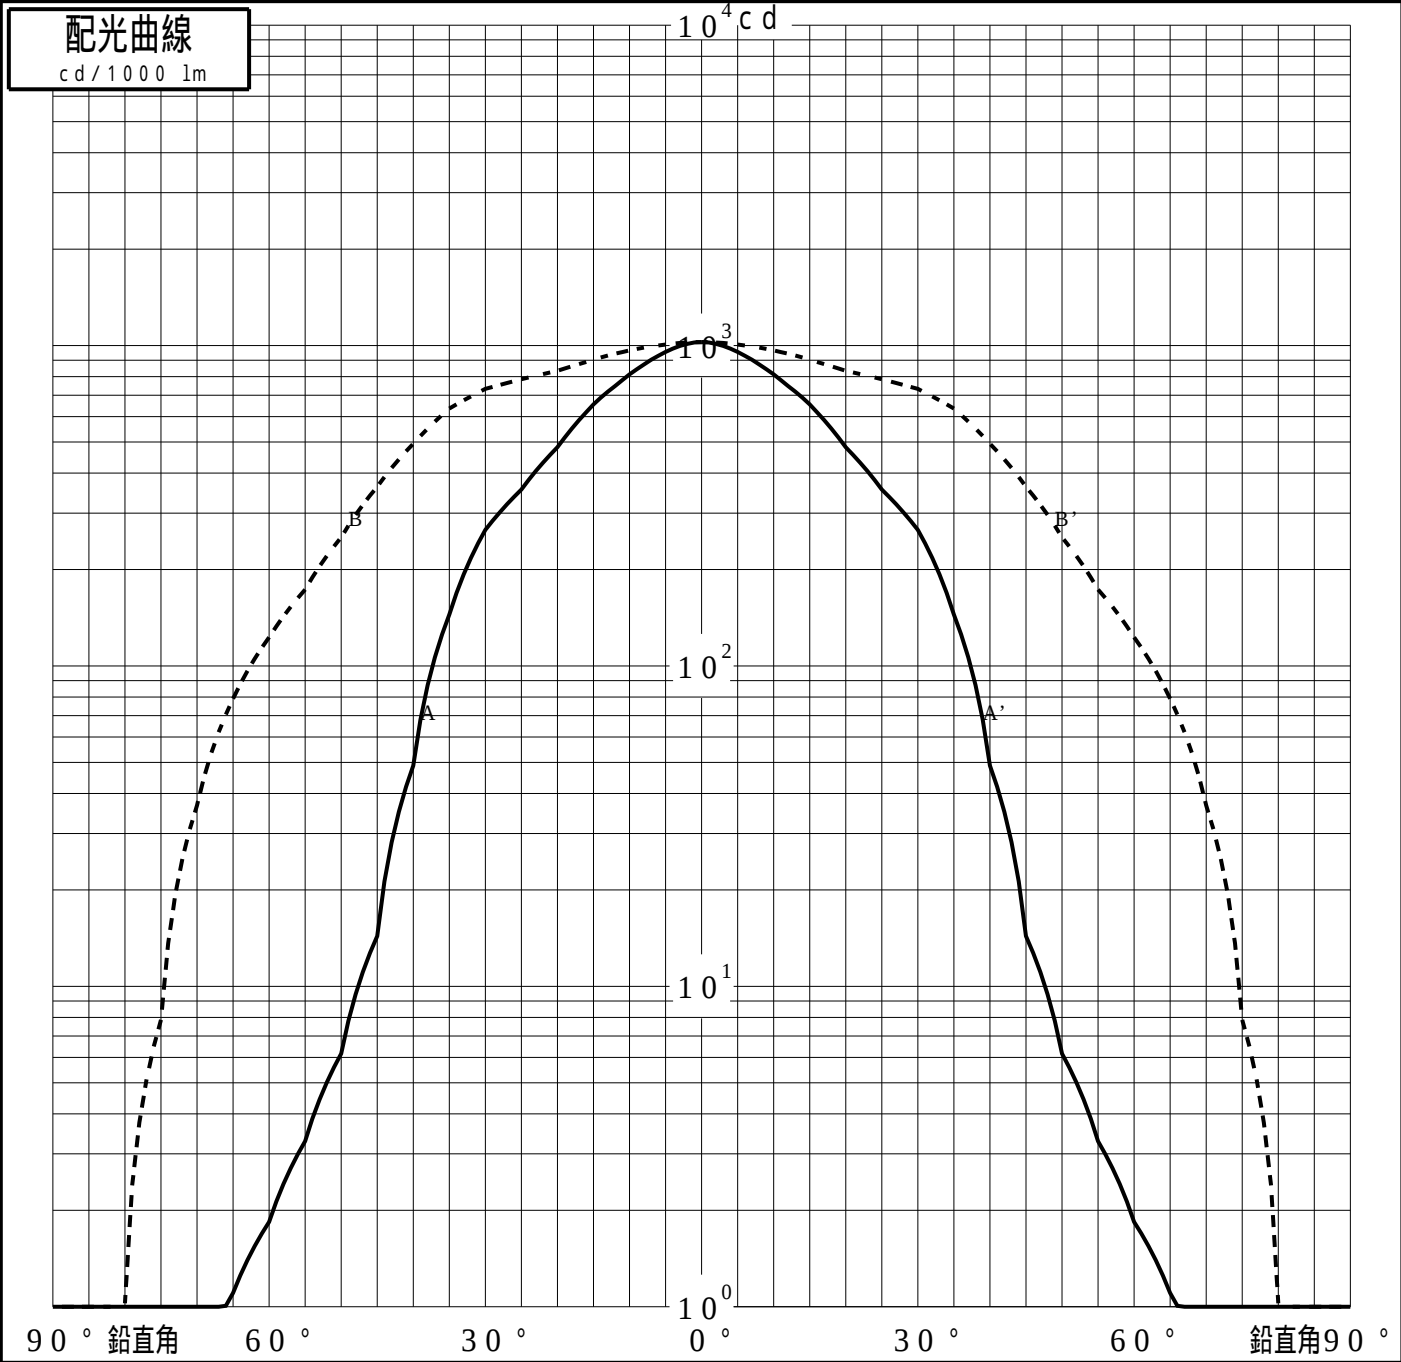


投光照明器具特性		
品名(品番)	YYY3 3 1 3 2 + YYY9 5 0 6 5	
光源	LED4000_70_960 x1 960.0 l m	
管理番号	K0177490(0) DJ 1 XY	



配光の区分・種類	非対称配光	主ビ - ム効率	%		
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20
器具効率	100.0 %	ビ - ム効率	52.9%	94.6%	97.8%
最大光度	1026 cd/1000 lm	ビ - ム角	AA' 38.2	74.4	79.8
			BB' 78.7	124.6	136.6



投光照明器具特性

品番 (品名)	YYY33132+YYY95065	光源	LED4000_70_960 ×1
管理番号	K0177490(0)DJ1 XY		

累積光束曲線

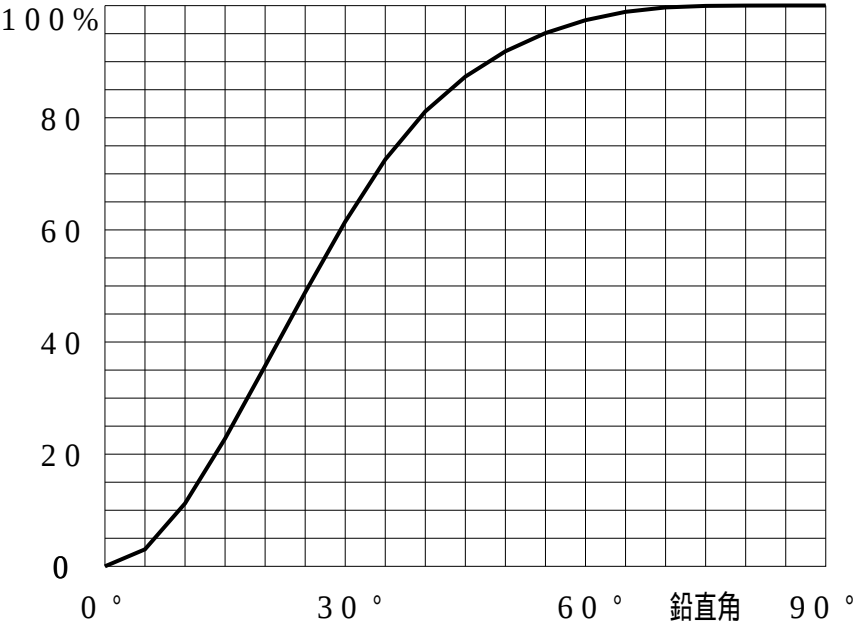

等光度曲線

(αβ座標系)
cd/1000 lm

