


投光照明器具特性		
品名(品番)	YYY66005+YYY96228	
光源	LED3000_70_395.7 ×1 395.7 l m	
管理番号	K0144291(0)DJ1 XY	



配光の区分・種類	非対称配光	主ビ - ム効率	%			
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.0 %	ビ - ム効率	42.9%	84.6%	94.9%	
最大光度	2234 cd / 1000 l m	ビ - ム角 AA' 33.0 BB' 33.7	68.8 69.4	84.9 85.8		

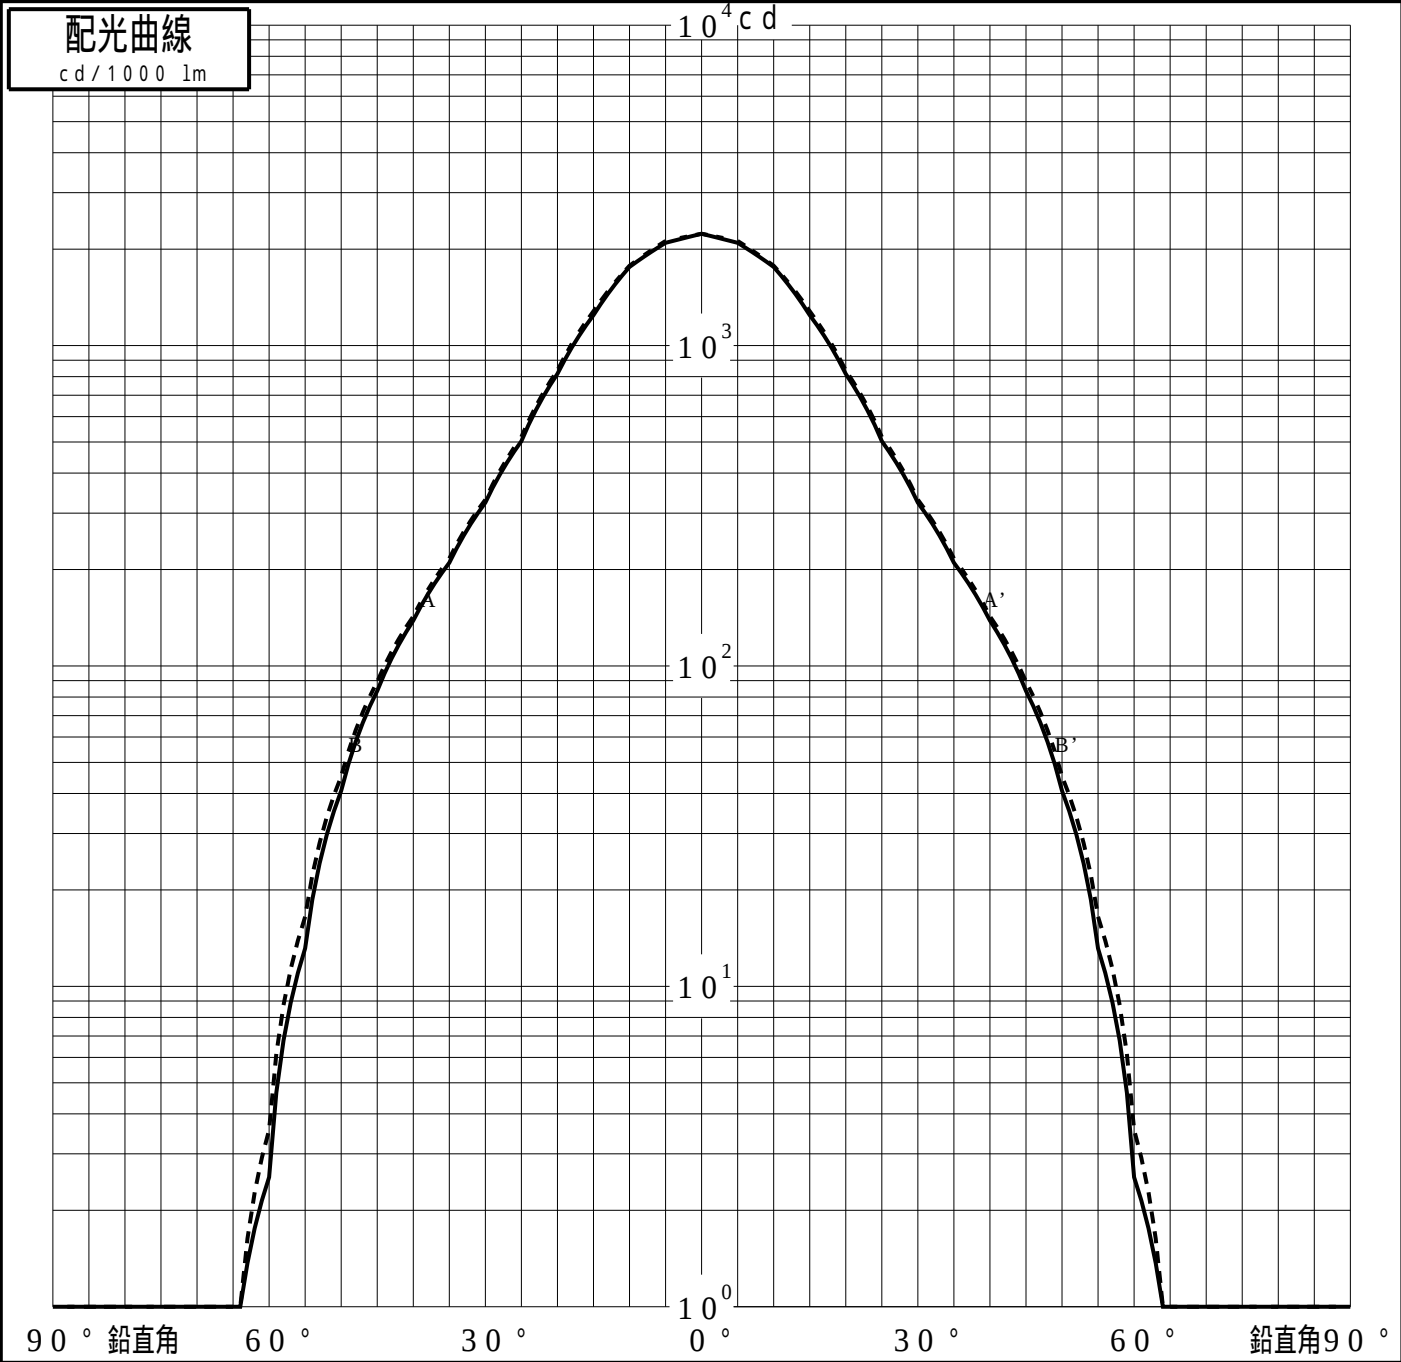

投光照明器具特性

品番 (品名)	YYY66005+YYY96228	光源	LED3000_70_395.7 ×1
管理番号	K0144291(0)DJ1 XY		

累積光束曲線

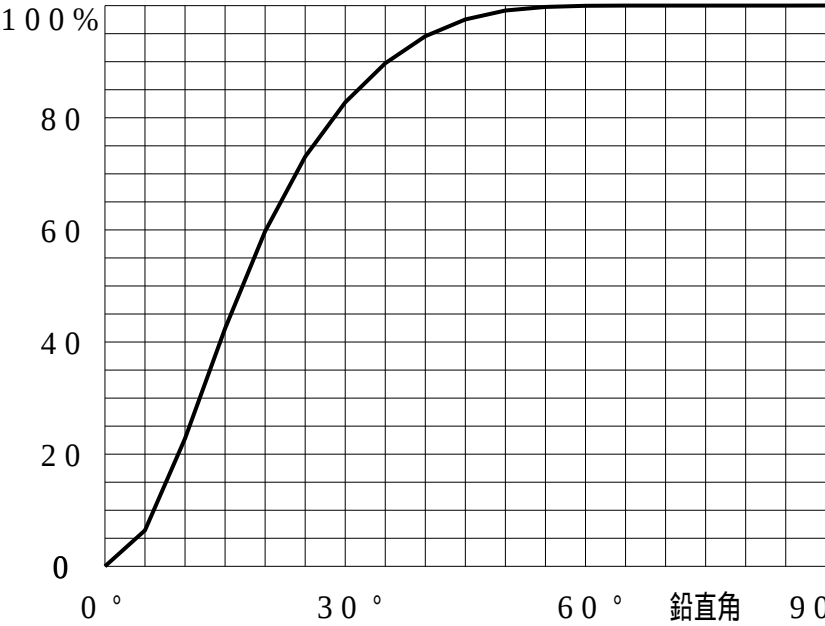

等光度曲線

(αβ座標系)
cd/1000 lm

