


投光照明器具特性		
品名（品番）	YYY6 6 0 0 5 K	
光源	LED3000_70_593 ×1 593.0 l m	
管理番号	K0195591(0) DR1 XY	



配光の区分・種類	非対称配光	主ビ - ム効率	%			
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	101.0 %	ビ - ム効率	54.9%	90.5%	96.9%	
最大光度	1791 cd/1000 lm	ビ - ム角 AA' 39.9° BB' 42.0°	72.5	85.5		

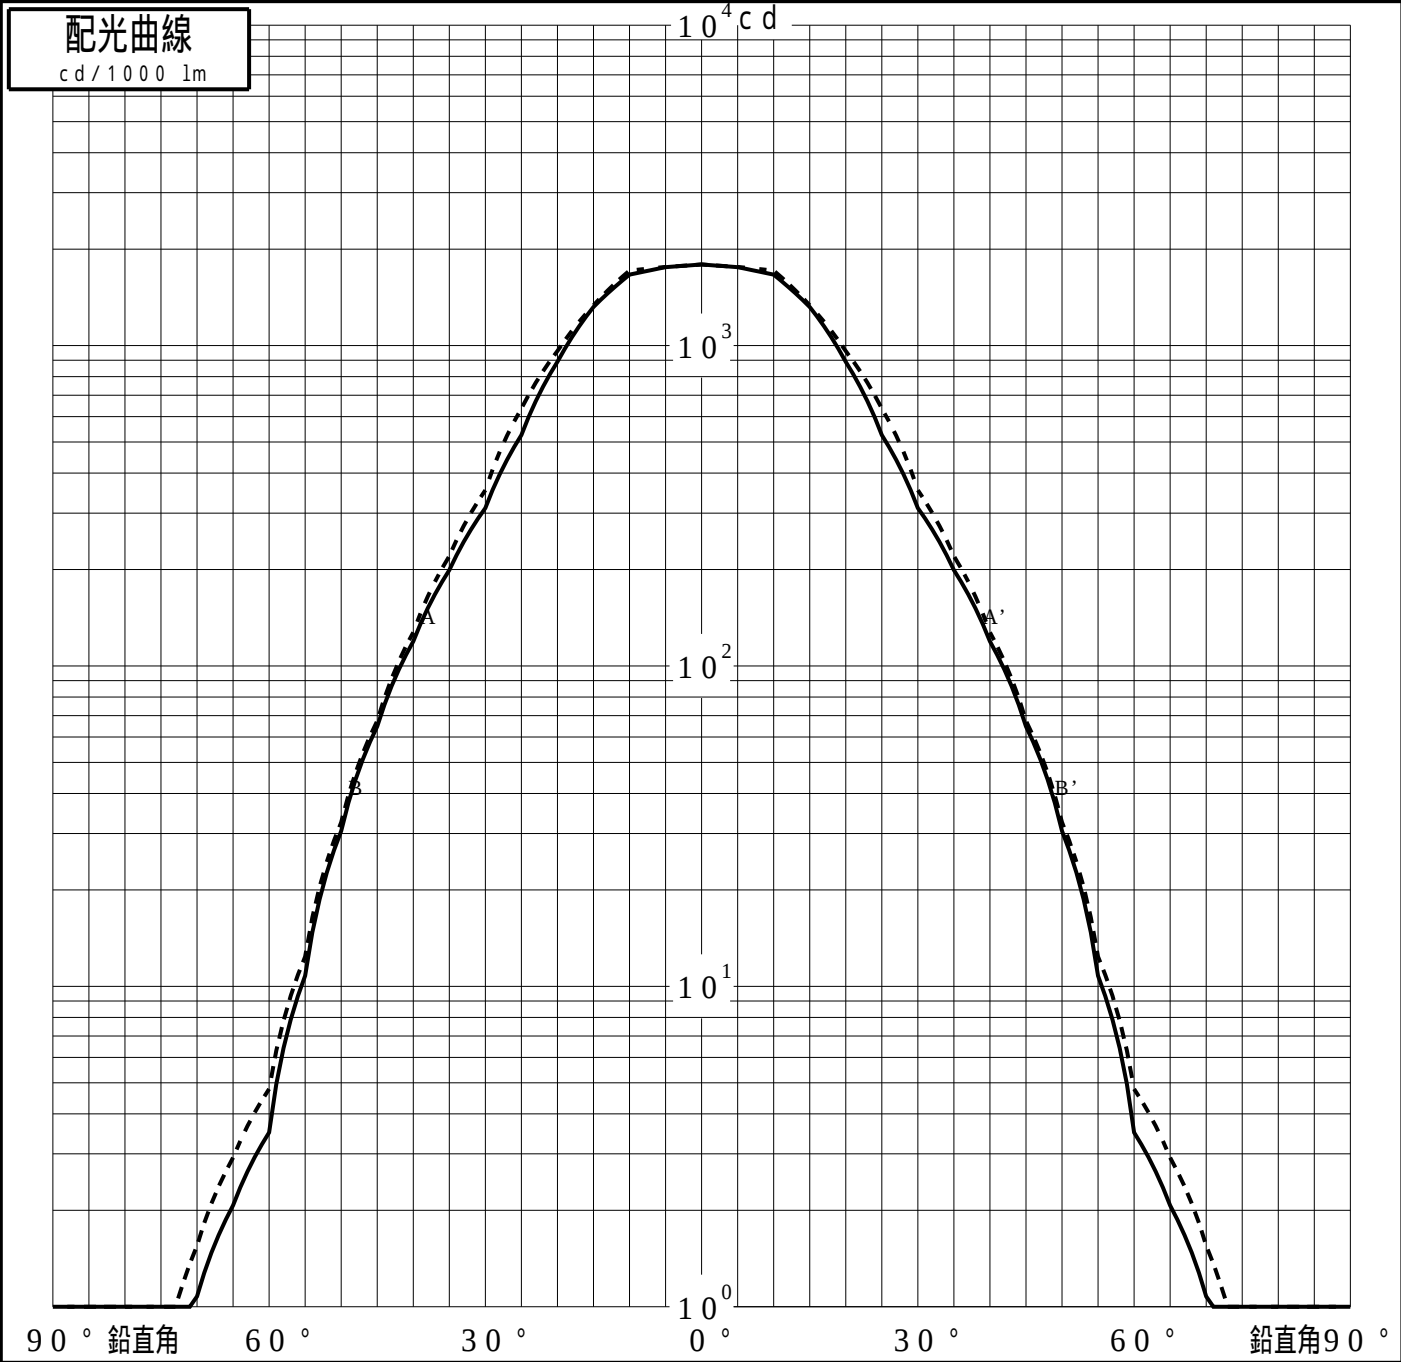

投光照明器具特性

品番 (品名)	YYY6 6 0 0 5 K	光源	LED3 0 0 0 _ 7 0 _ 5 9 3 × 1
管理番号	K0 1 9 5 5 9 1 (0) DR1 XY		

累積光束曲線

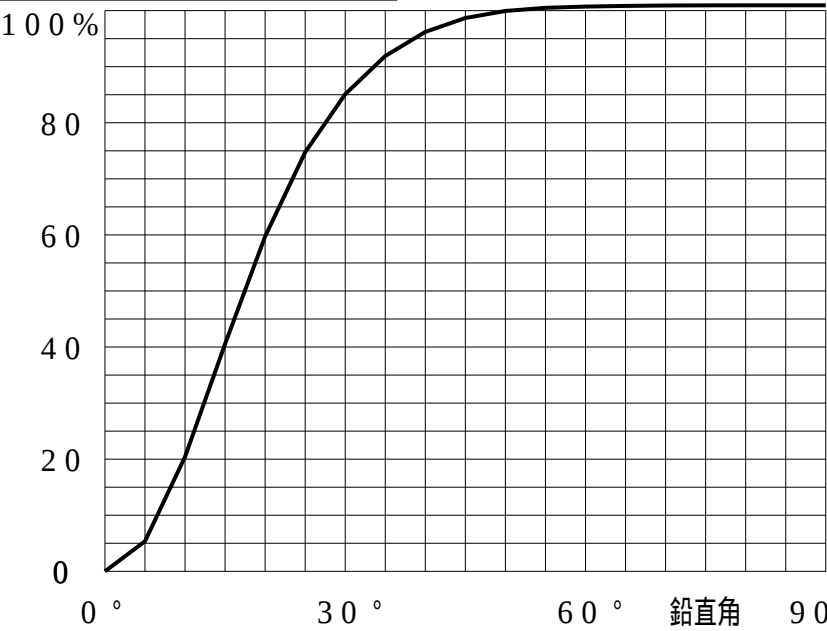

等光度曲線

(α β 座標系)
cd / 1 0 0 0 lm

