


投光照明器具特性	
品名（品番）	YYY6 6 0 0 5 K+ YYY9 6 2 2 0
光源	LED3 0 0 0 _ 7 0 _ 2 0 9 x1 2 0 9 . 0 l m
管理番号	K0 1 9 5 6 0 0 (0) DR1 XY



配光の区分・種類	非対称配光	主ビーム効率	%			
器具点灯角度		ビーム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	102.3 %	ビーム効率	45.7%	86.9%	94.0%	
最大光度	4353 cd/1000 lm	ビーム角 AA' 25.1 BB' 25.5	47.4	47.6	56.6 57.2	

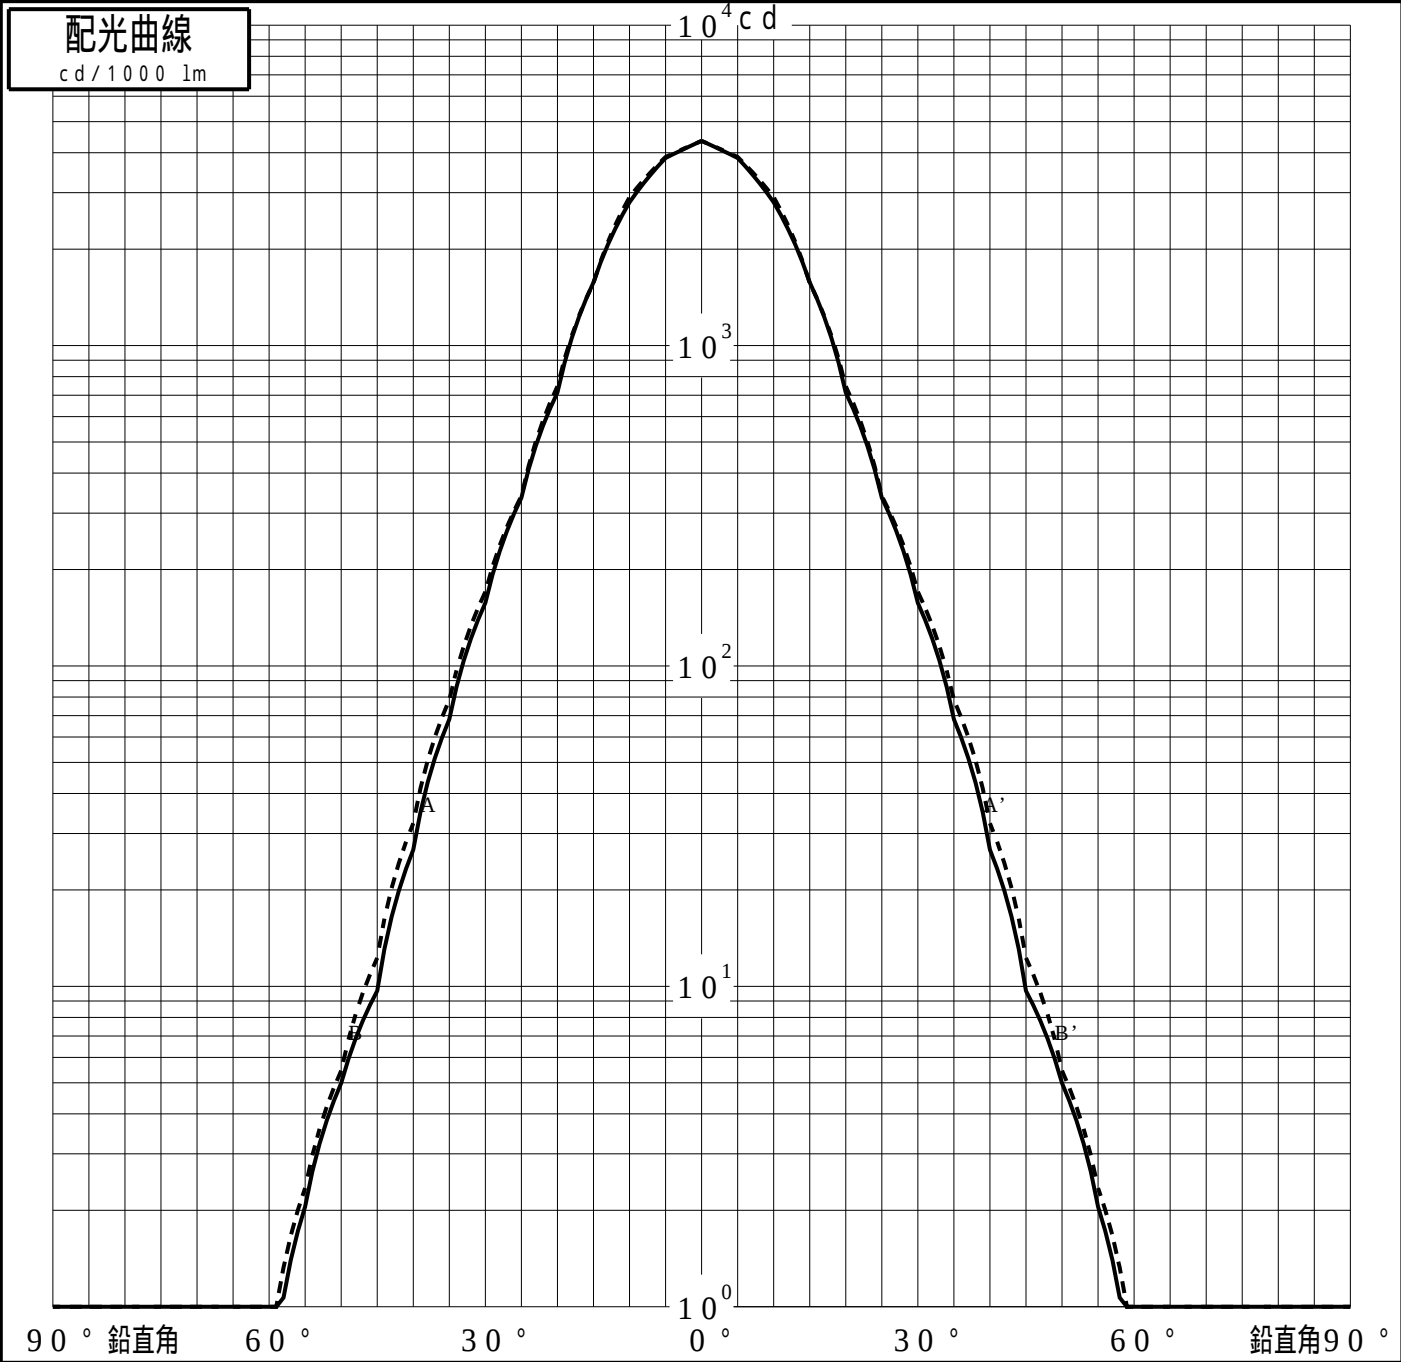

投光照明器具特性

品番 (品名)	YYY66005K+YYY96220	光源	LED3000_70_209 ×1
管理番号	K0195600(0)DR1 XY		

累積光束曲線

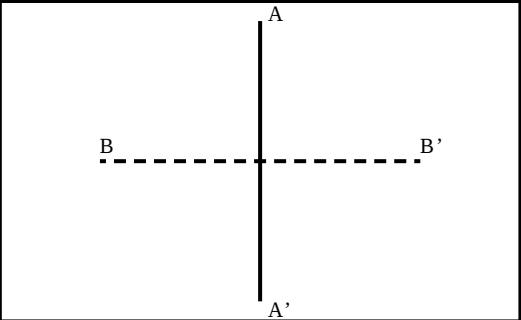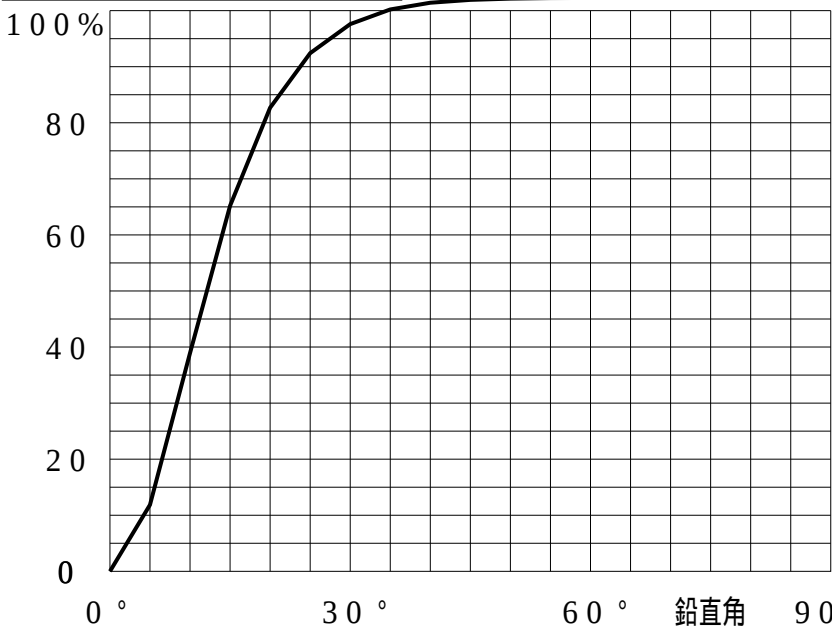

等光度曲線
(αβ座標系)
cd/1000 lm

