


投光照明器具特性				
品名（品番）	YYY66005K+YYY96224			
光源	LED3000_70_290 ×1 290.0 lm			
管理番号	K0195589(0)DR1 XY			



配光の区分・種類	非対称配光	主ビーム効率	%			
器具点灯角度		ビーム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.9 %	ビーム効率	45.7%	88.2%	95.9%	
最大光度	1805 cd/1000 lm	ビーム角 AA' 44.4° BB' 32.9°	84.2° 71.0°	97.4° 86.6°		

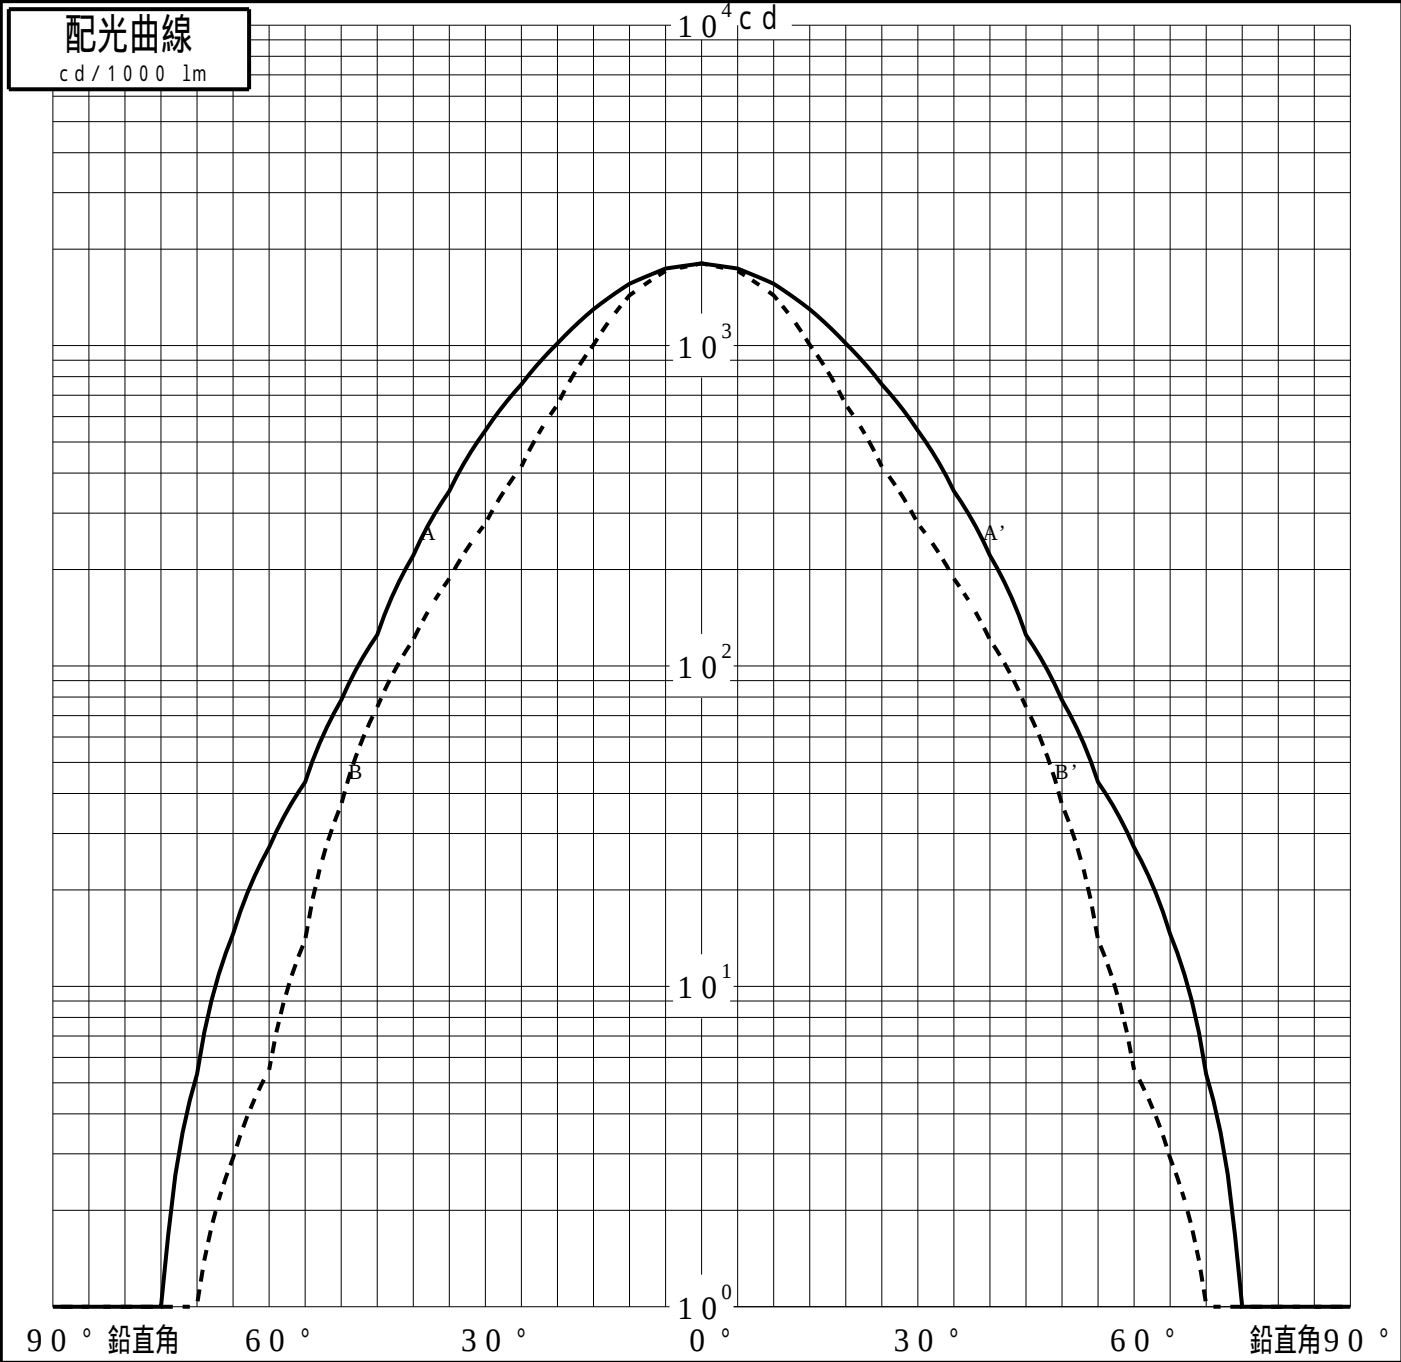

投光照明器具特性


品番 (品名)	YYY6 6 0 0 5 K+ YYY9 6 2 2 4	光源	LED3 0 0 0 _ 7 0 _ 2 9 0 ×1
管理番号	K0 1 9 5 5 8 9 (0) DR1 XY		

累積光束曲線

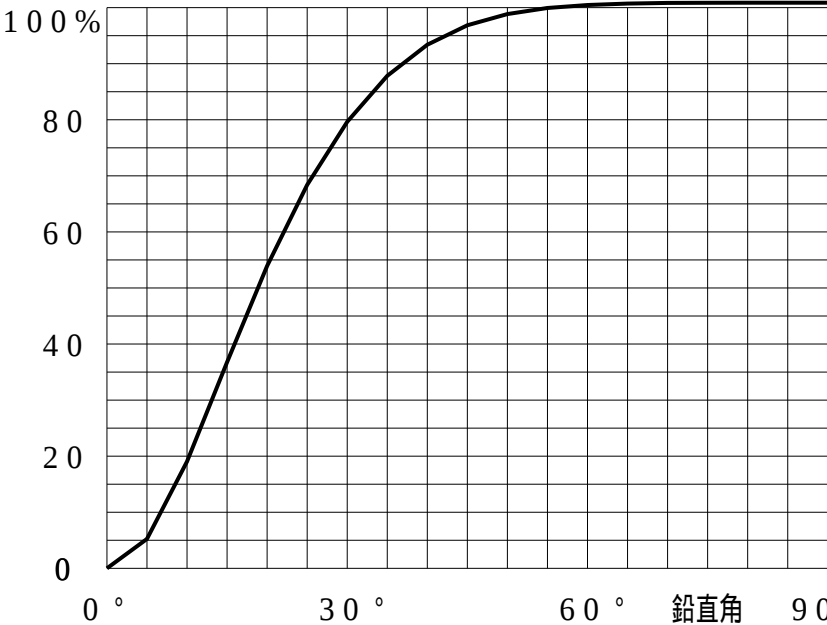

等光度曲線

(αβ座標系)
cd / 1000 lm

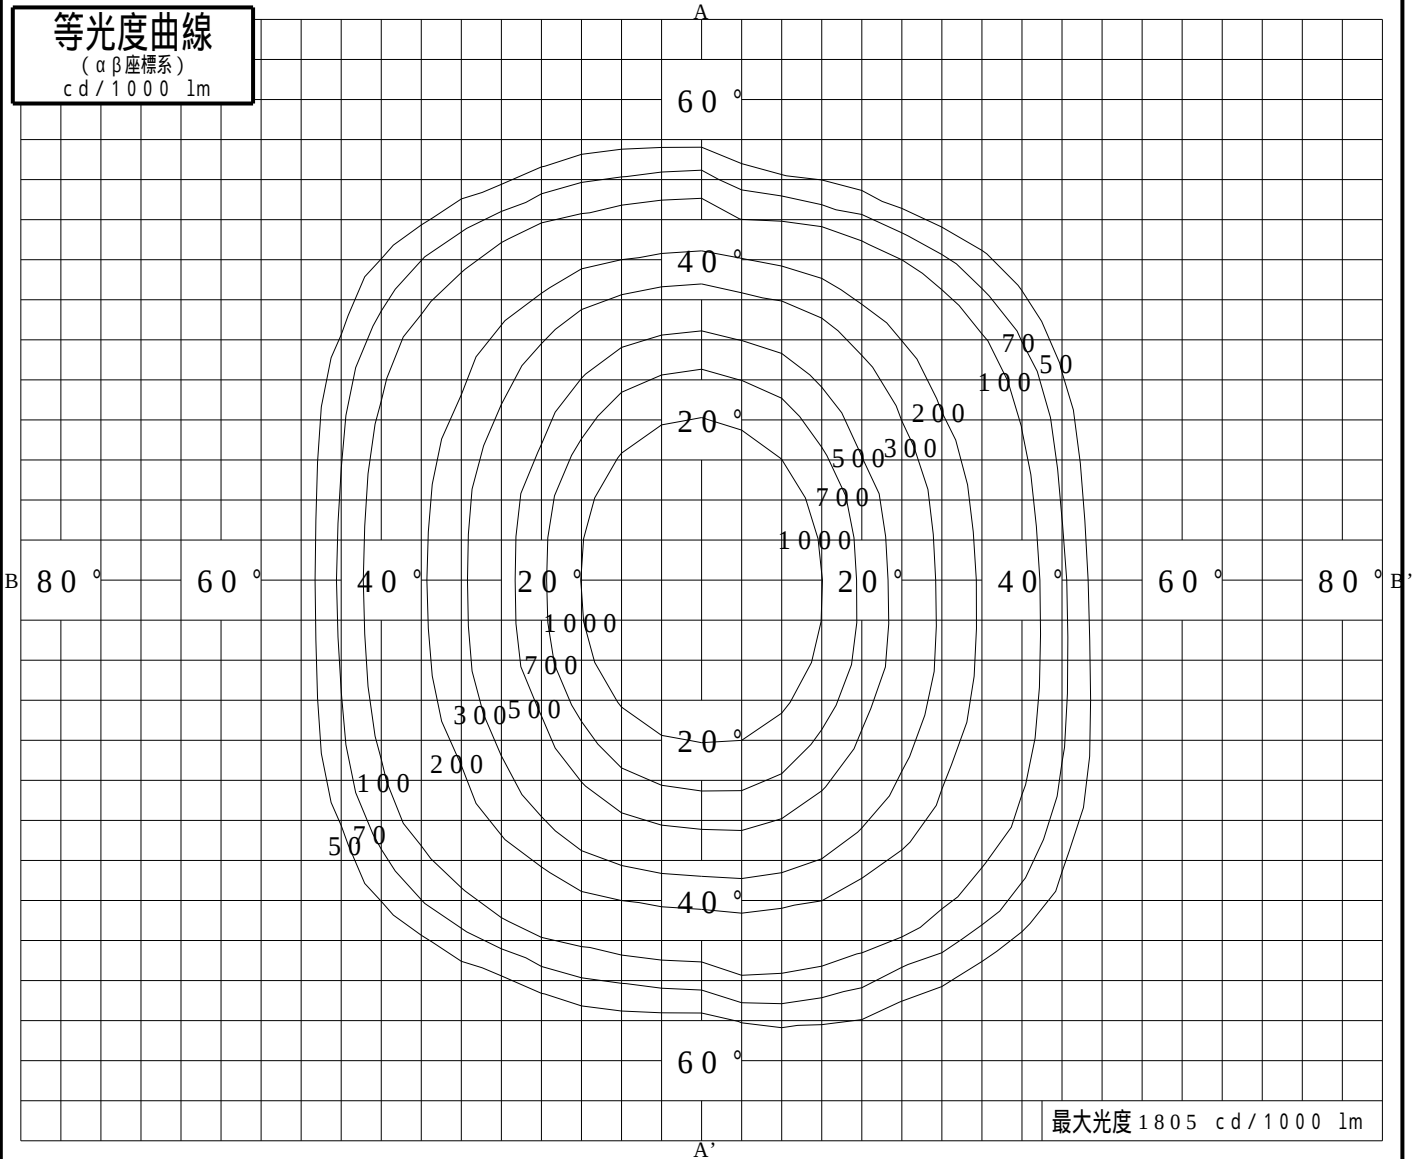

最大光度 1805 cd / 1000 lm