


投光照明器具特性					
品名（品番）	YYY66005K+YYY96228				
光源	LED3000_70_387 ×1 387.0 lm				
管理番号	K0195590(0)DR1 XY				



配光の区分・種類	非対称配光	主ビ - ム効率	%			
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	101.1 %	ビ - ム効率	44.9%	85.2%	94.4%	
最大光度	2185 cd/1000 lm	ビ - ム角 AA' 34.0 BB' 34.4	69.0 69.4	84.9 86.0		

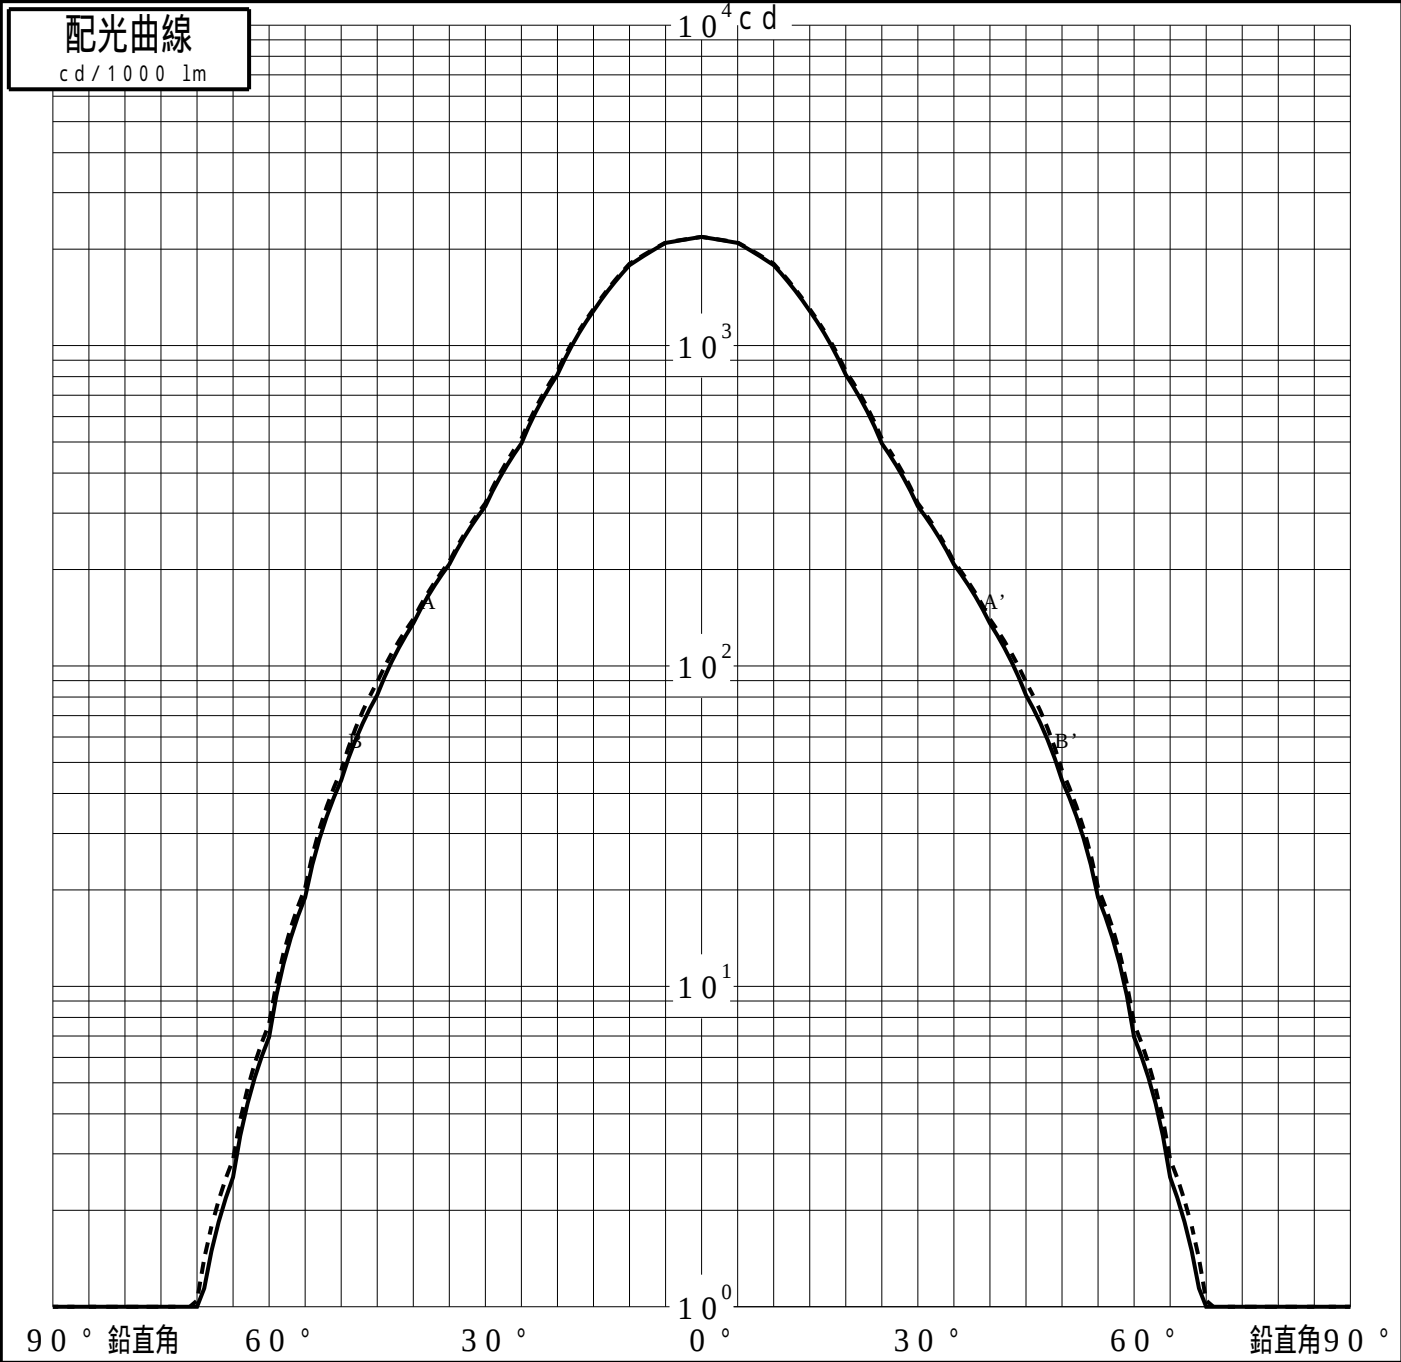

投光照明器具特性


品番 (品名)	YYY66005K+YYY96228	光源	LED3000_70_387 x1
管理番号	K0195590(0)DR1 XY		

累積光束曲線

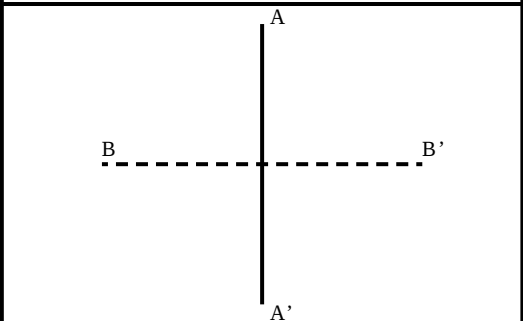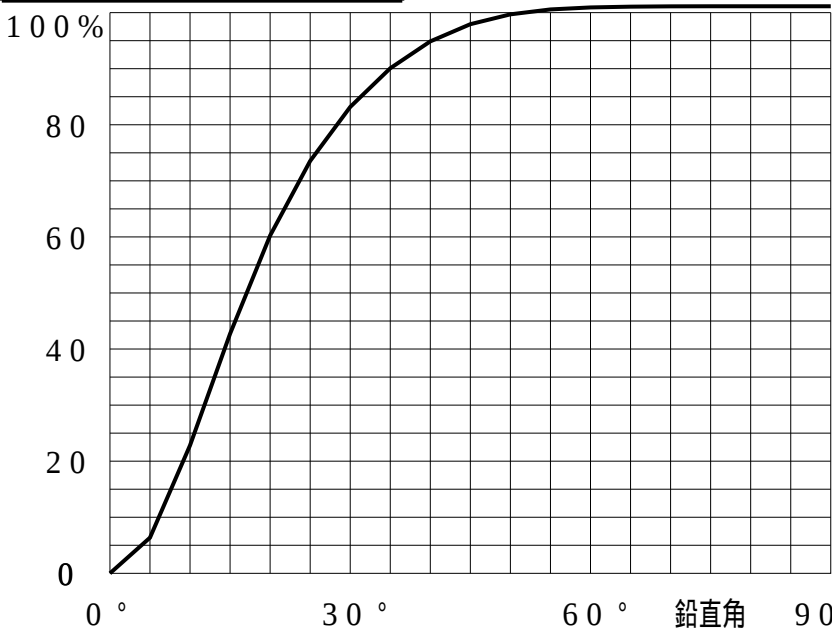

等光度曲線
($\alpha\beta$ 座標系)
cd/1000 lm

(α β 座標系)

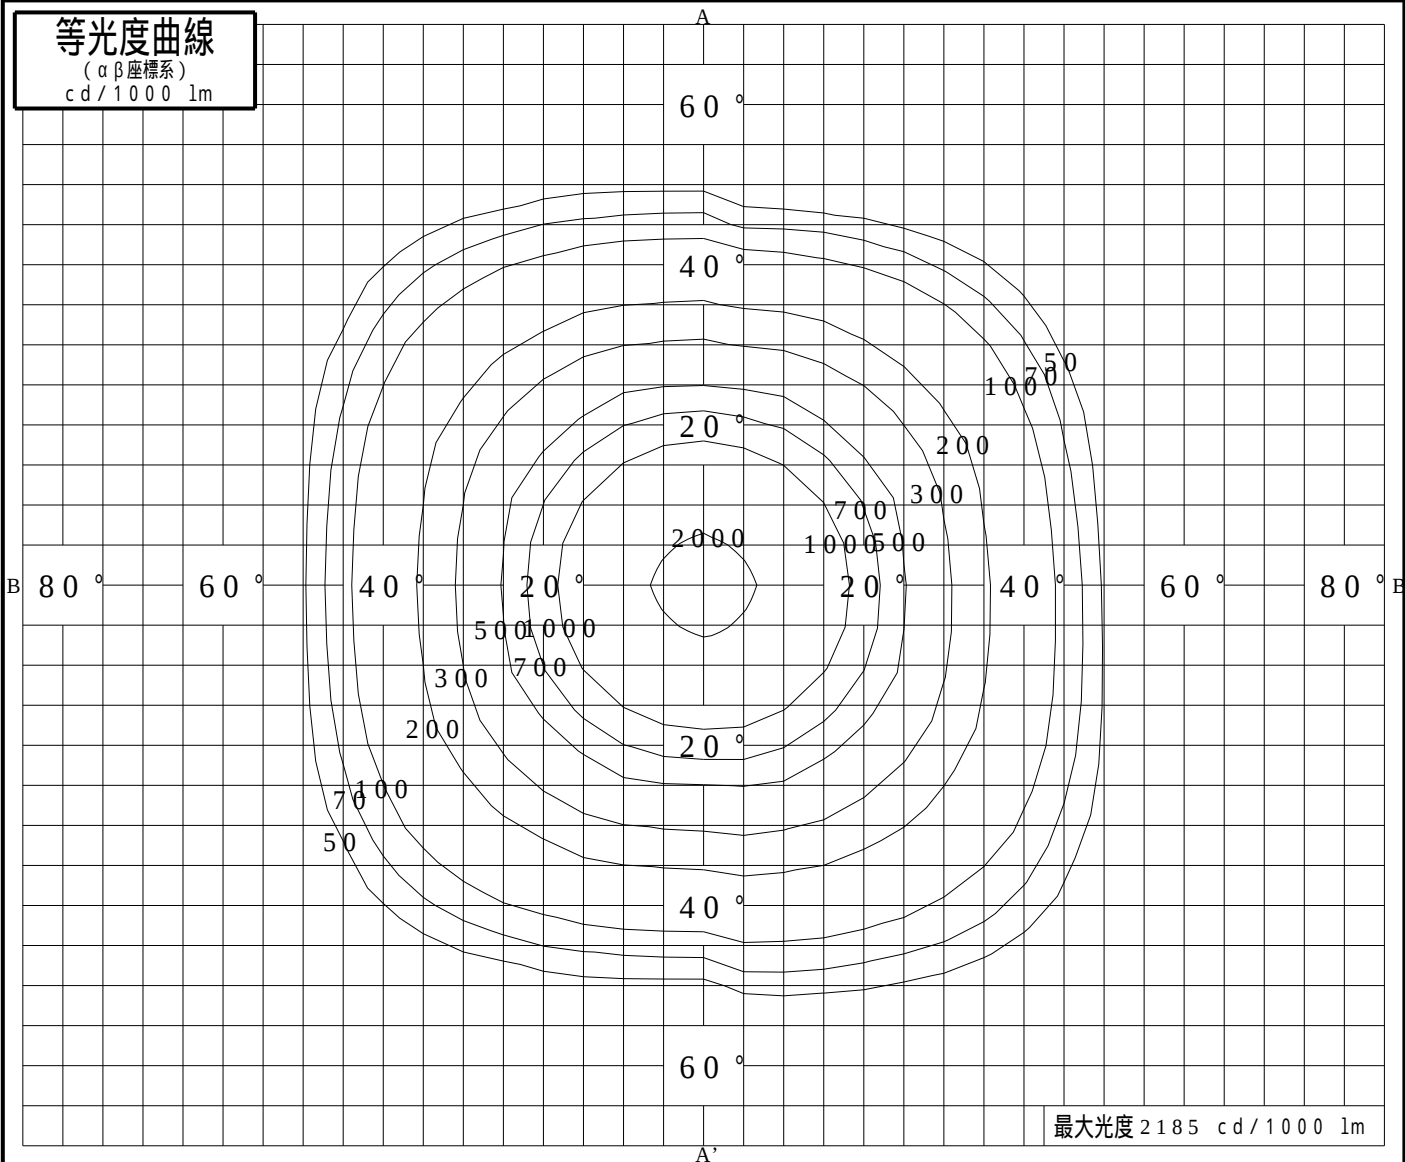

最大光度 2185 cd/1000 lm