


投光照明器具特性		
品名(品番)	YYY6 6 0 5 1 + YYY9 6 2 2 0	
光源	LED3 0 0 0 _ 7 0 _ 4 3 0 . 4 ×1	



配光の区分・種類	非対称配光	主ビ - ム効率	%			
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.0 %	ビ - ム効率	26.4%	69.6%	83.4%	
最大光度	10101 cd/1000 lm	ビ - ム角 AA' 12.4 BB' 12.5	32.8	32.9	43.5	

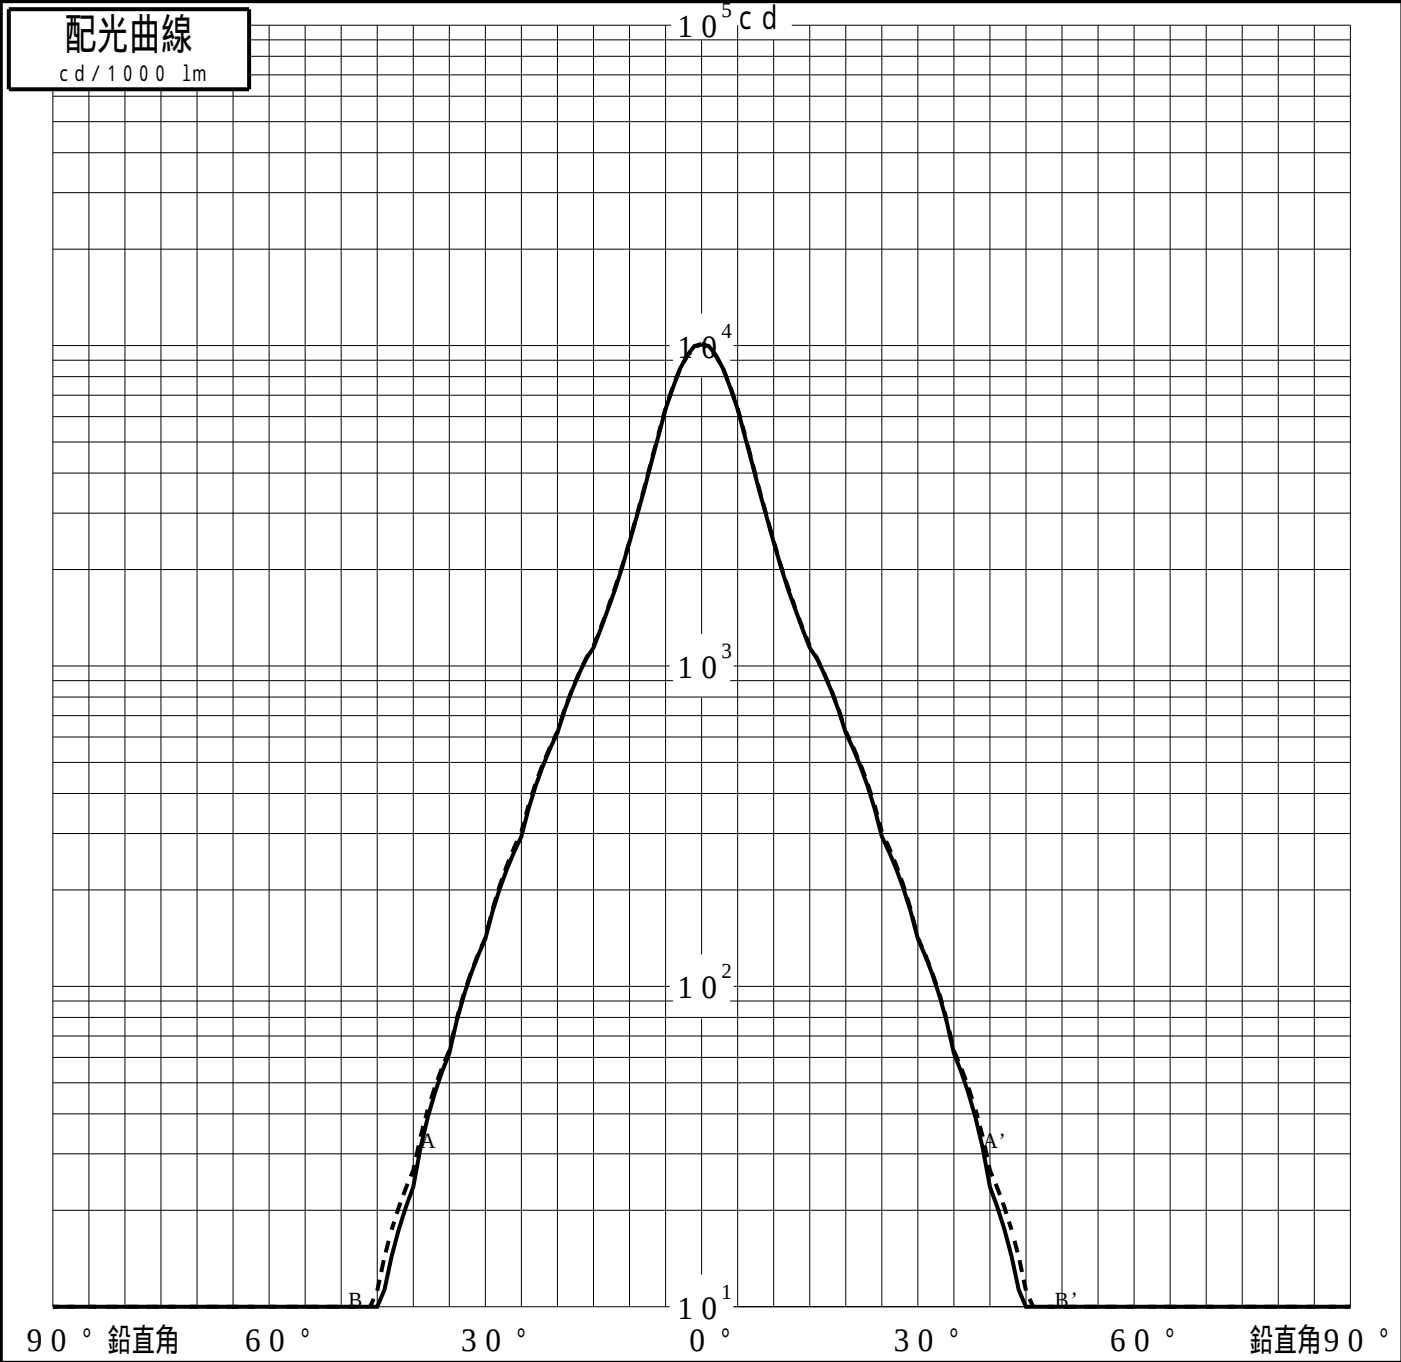

投光照明器具特性

品番 (品名)	YYY66051+YYY96220	光源	LED3000_70_430.4 ×1
管理番号	K0144189(0)DJ1 XY		

累積光束曲線

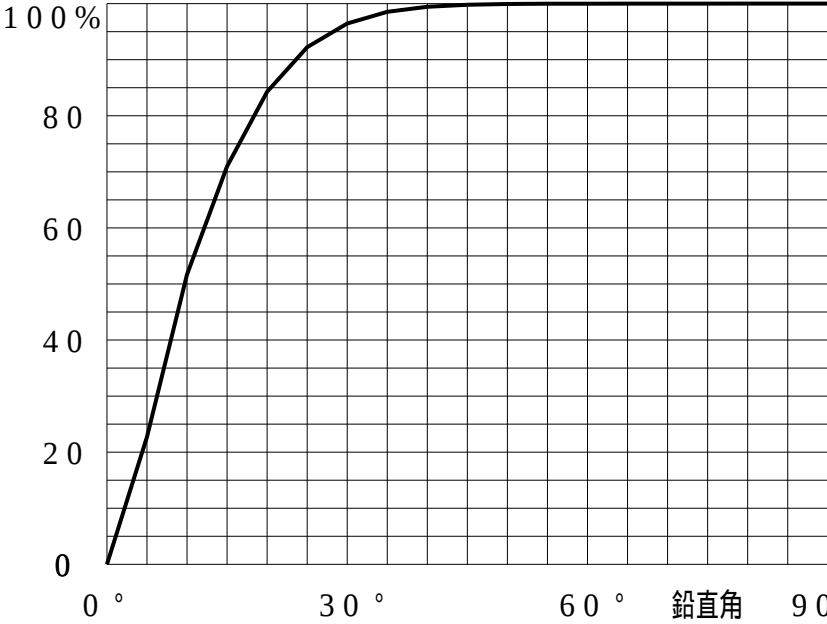

等光度曲線

(αβ座標系)
cd/1000 lm

