


投光照明器具特性		
品名（品番）	YYY6 6 0 5 1 + YYY9 6 2 2 4	
光源	LED3000_70_511.3 ×1	



配光の区分・種類	非対称配光	主ビーム効率	%			
器具点灯角度		ビーム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.0 %	ビーム効率	58.4%	92.6%	96.7%	
最大光度	2390 cd/1000 lm	ビーム角 AA' 60.7° BB' 40.8°	92.1	105.0	98.1	

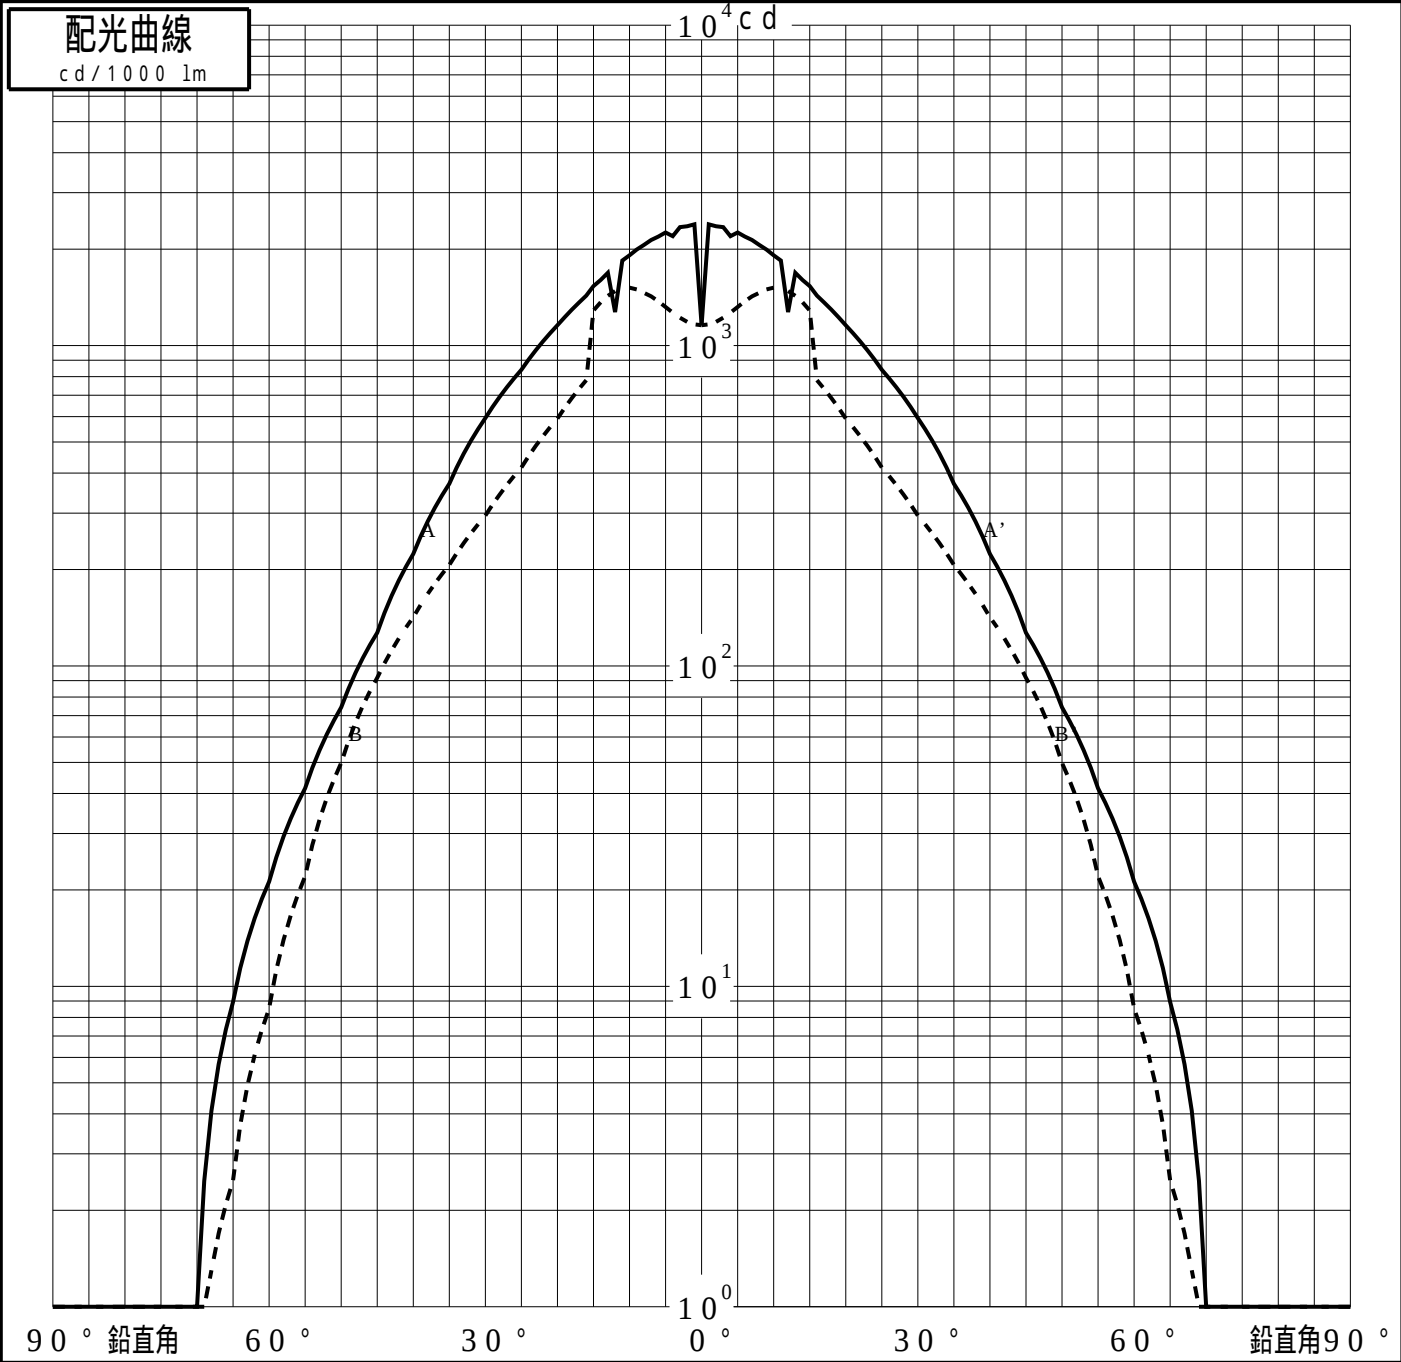

投光照明器具特性


品番 (品名)	YYY66051+YYY96224	光源	LED3000_70_511.3 ×1
管理番号	K0144190(0)DJ1 XY		

累積光束曲線

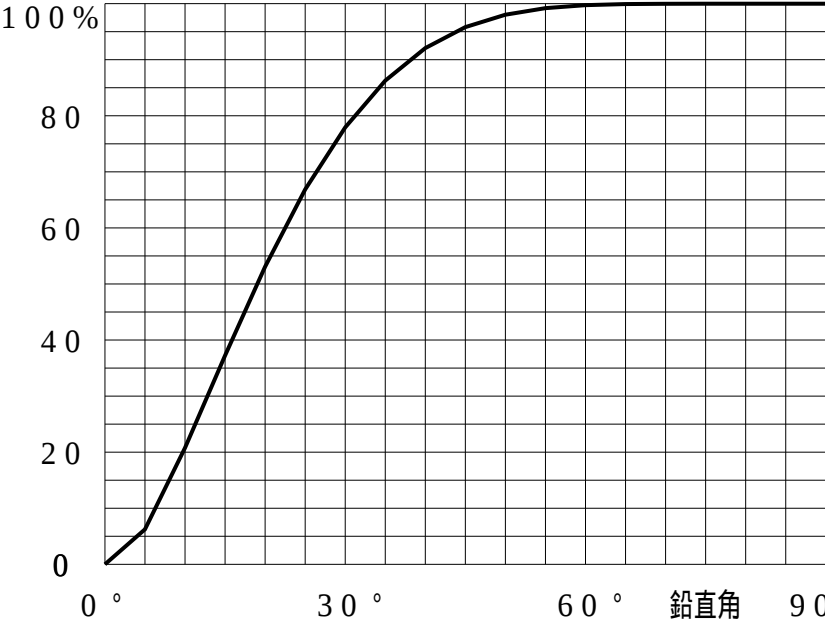

等光度曲線

(αβ座標系)
cd/1000 lm

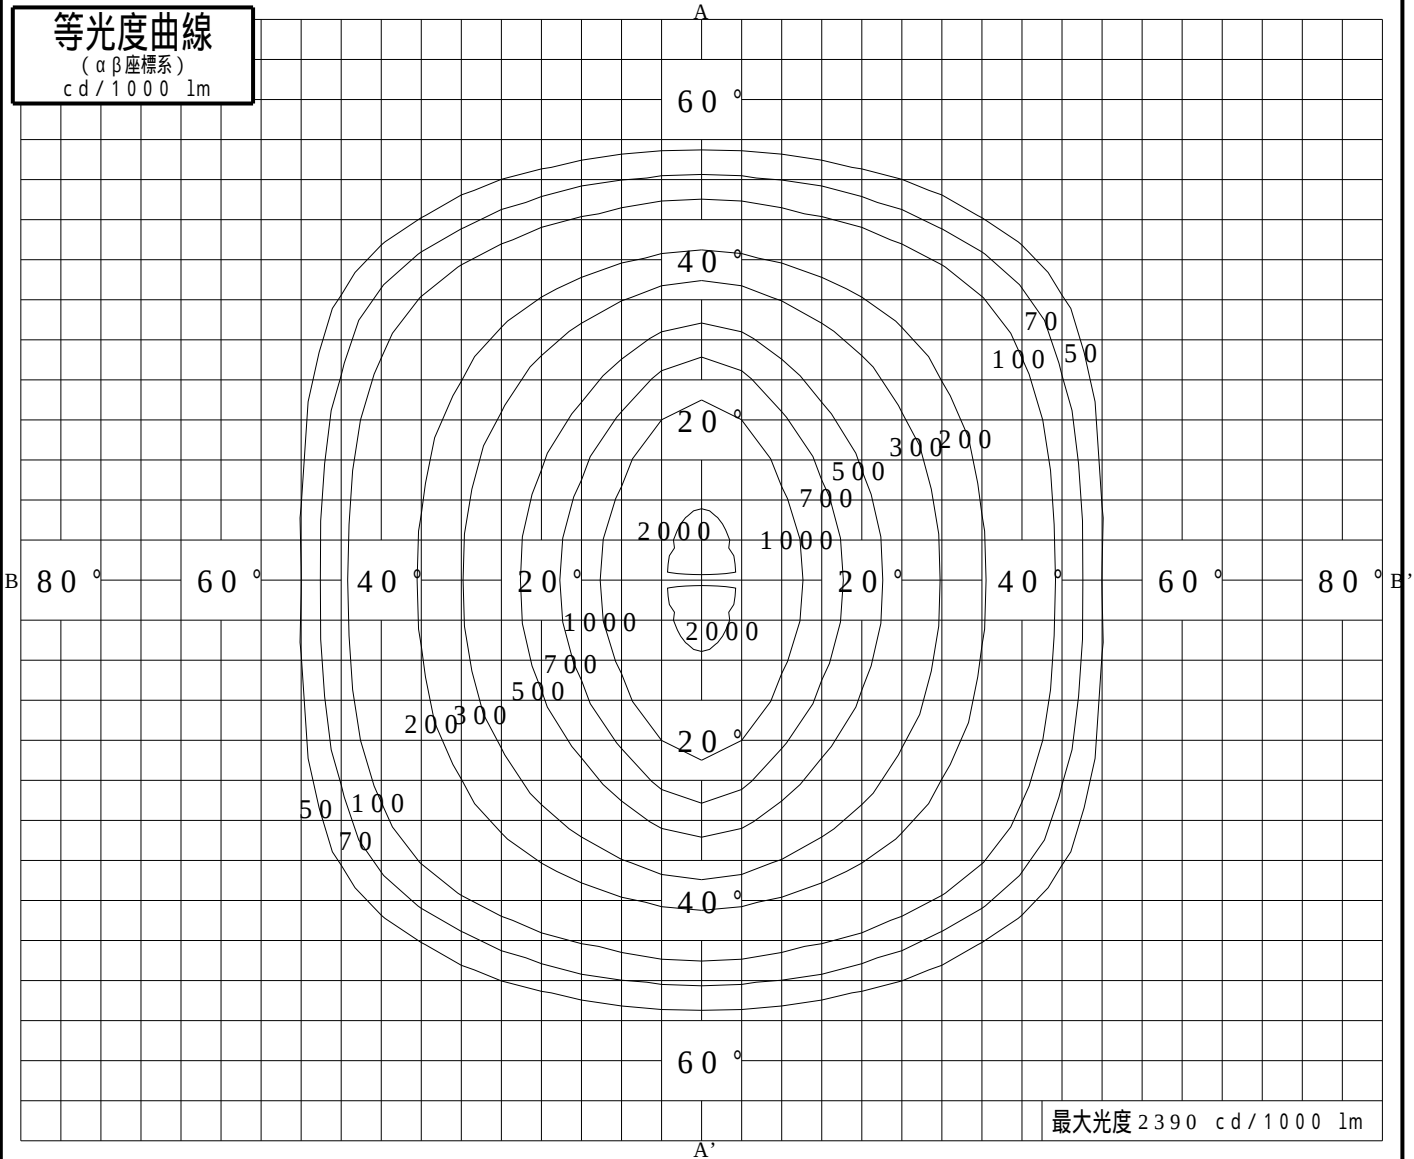

最大光度 2390 cd/1000 lm