


投光照明器具特性		
品名（品番）	YYY6 6 0 5 1 K	
光源	LED3000_70_750 x1 750.0 l m	
管理番号	K0195578(0) DR1 XY	



配光の区分・種類	非対称配光	主ビ - ム効率	%			
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	103.5 %	ビ - ム効率	14.7%	45.7%	66.8%	
最大光度	11067 cd/1000 lm	ビ - ム角 AA' BB'	9.9° 9.9°	24.0° 24.0°	42.4° 44.0°	

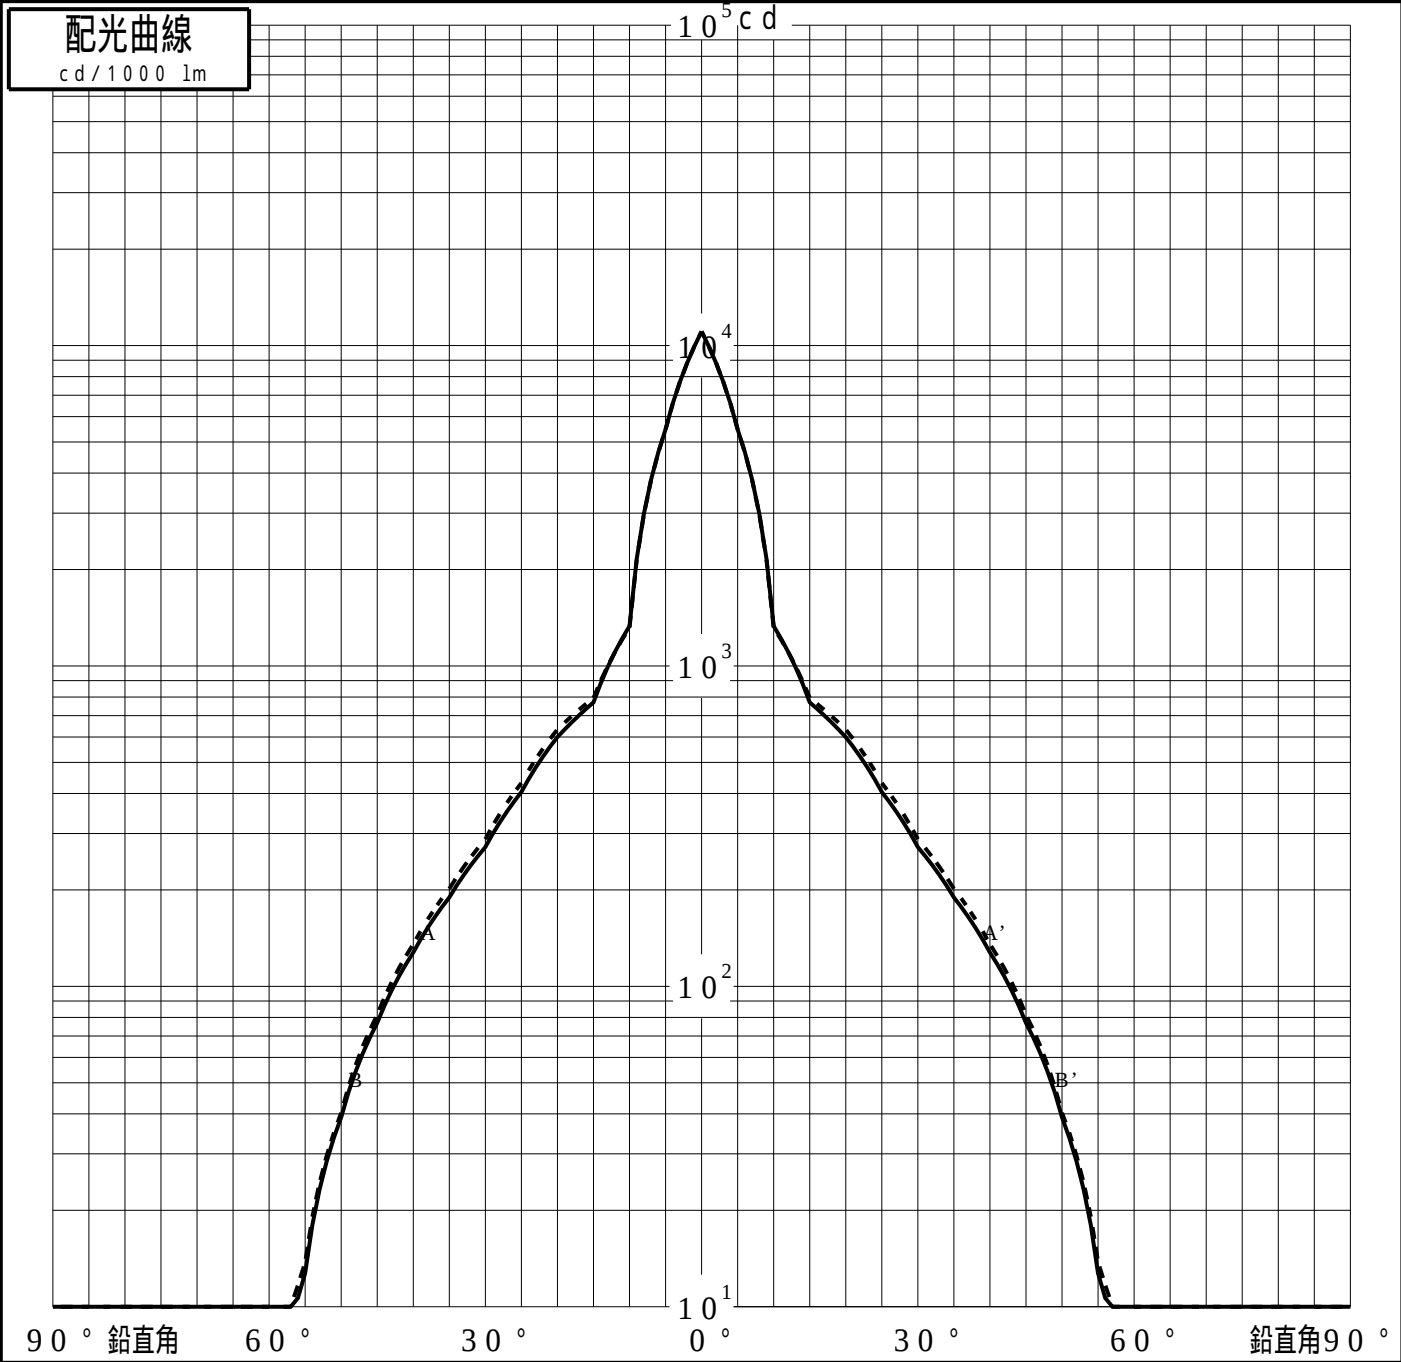

投光照明器具特性

品番 (品名)	YYY6 6 0 5 1 K	光源	LED3 0 0 0 _ 7 0 _ 7 5 0 ×1
管理番号	K0 1 9 5 5 7 8 (0) DR1 XY		

累積光束曲線

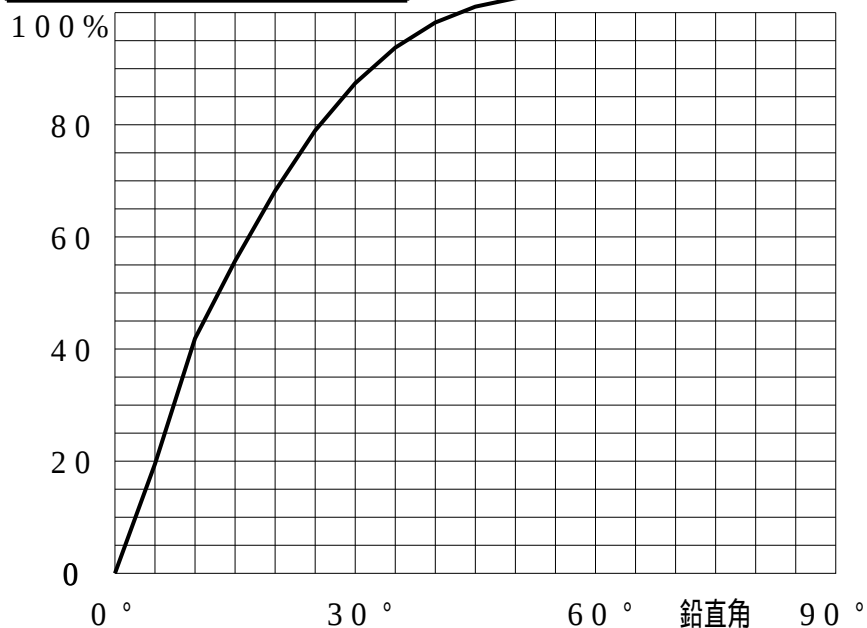

等光度曲線

($\alpha\beta$ 座標系)

