


投光照明器具特性					
品名（品番）	YYY66051K+YYY96224				
光源	LED3000_70_447 ×1 447.0 lm				
管理番号	K0195581(0)DR1 XY				



配光の区分・種類	非対称配光	主ビーム効率	%			
器具点灯角度		ビーム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	101.7 %	ビーム効率	22.9%	73.1%	87.9%	
最大光度	3749 cd/1000 lm	ビーム角 AA' 34.3° BB' 12.6°	74.7° 49.5°	86.6° 69.3°		

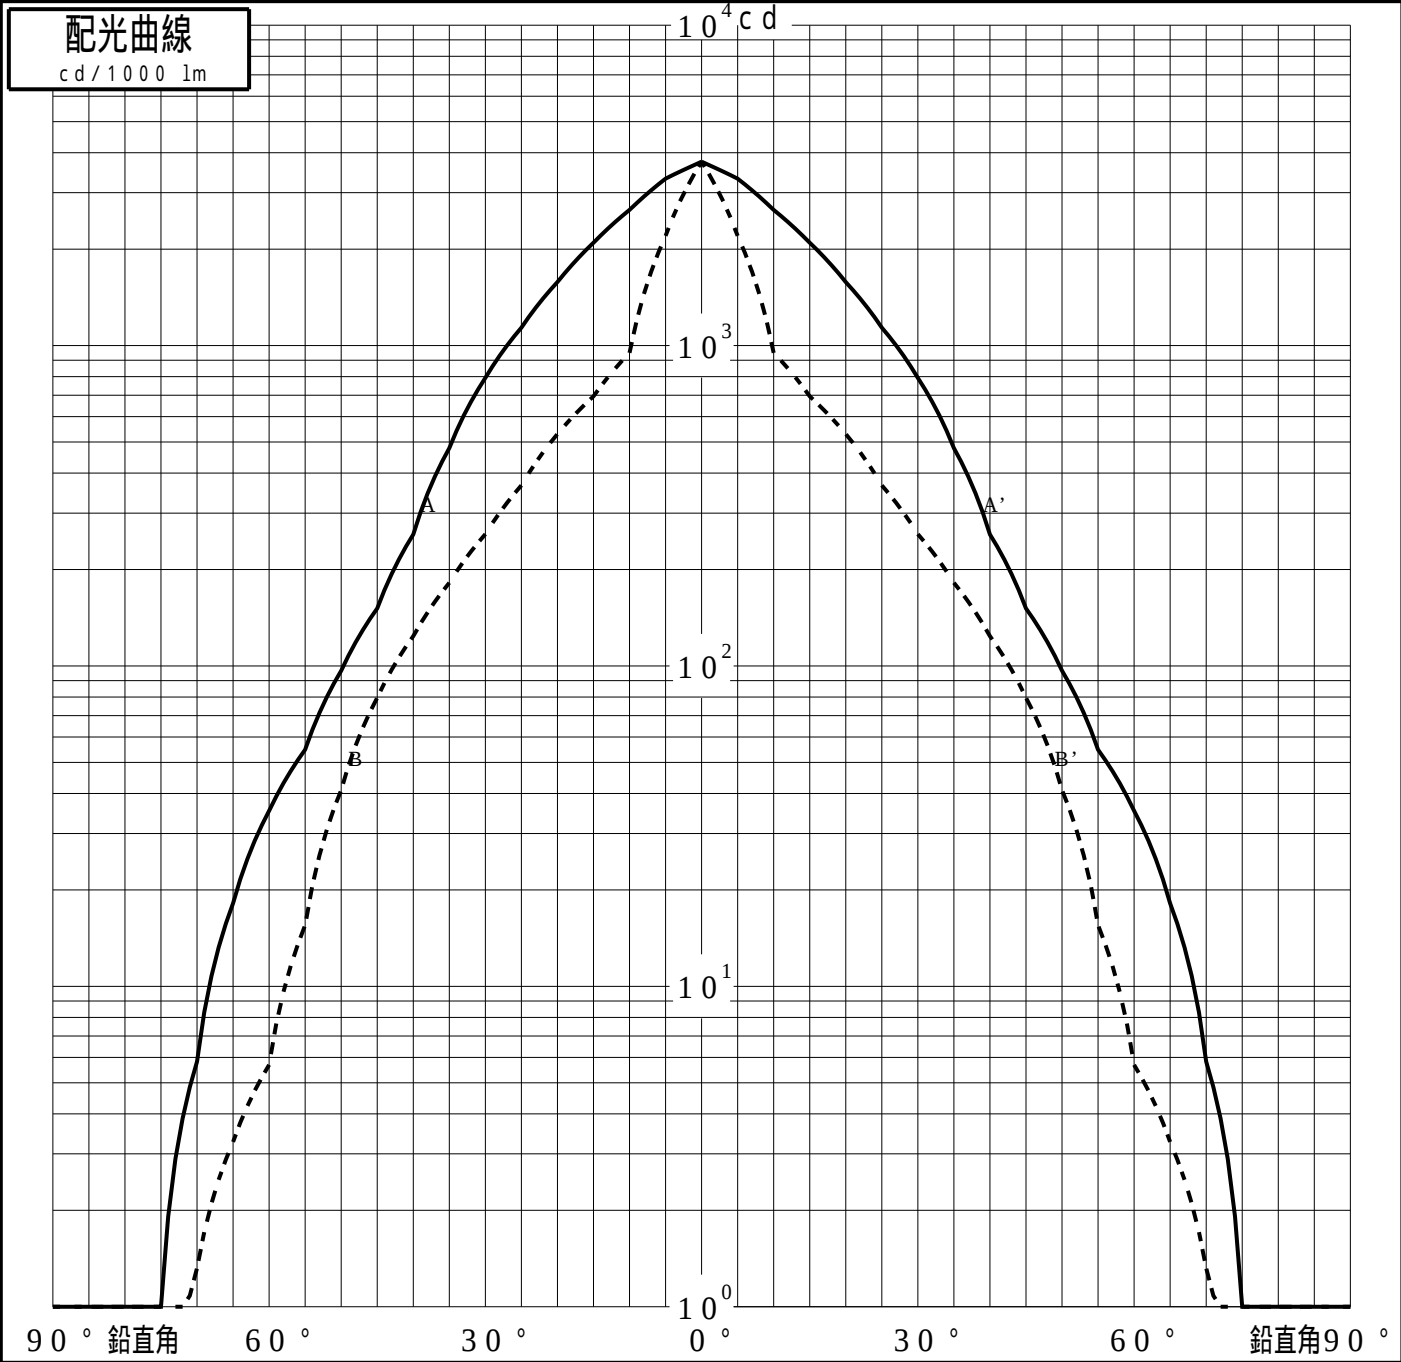

投光照明器具特性

品番 (品名)	YYY6 6 0 5 1 K+ YYY9 6 2 2 4	光源	LED3 0 0 0 _ 7 0 _ 4 4 7 ×1
管理番号	K0 1 9 5 5 8 1 (0) DR1 XY		

累積光束曲線

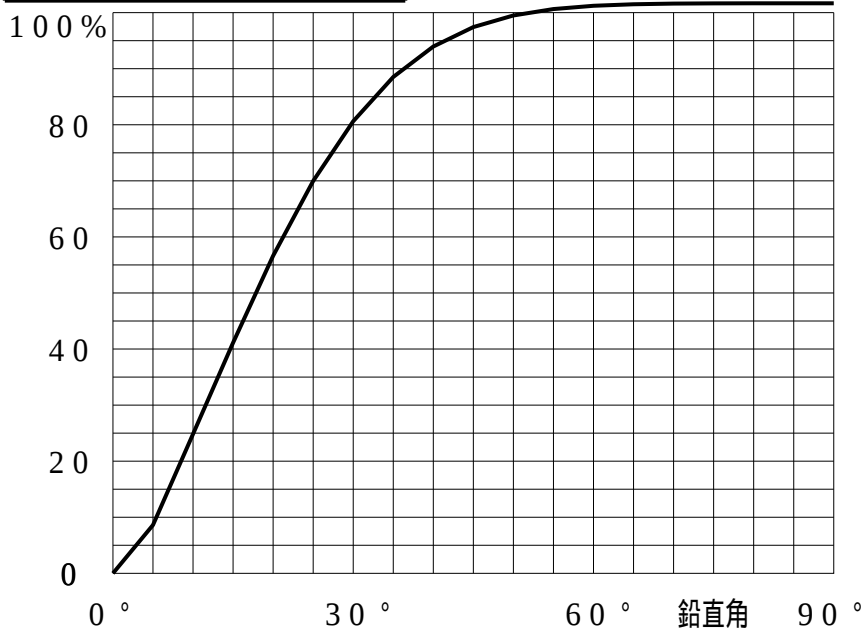

等光度曲線

(α β 座標系)

