



非常用照明器具特性

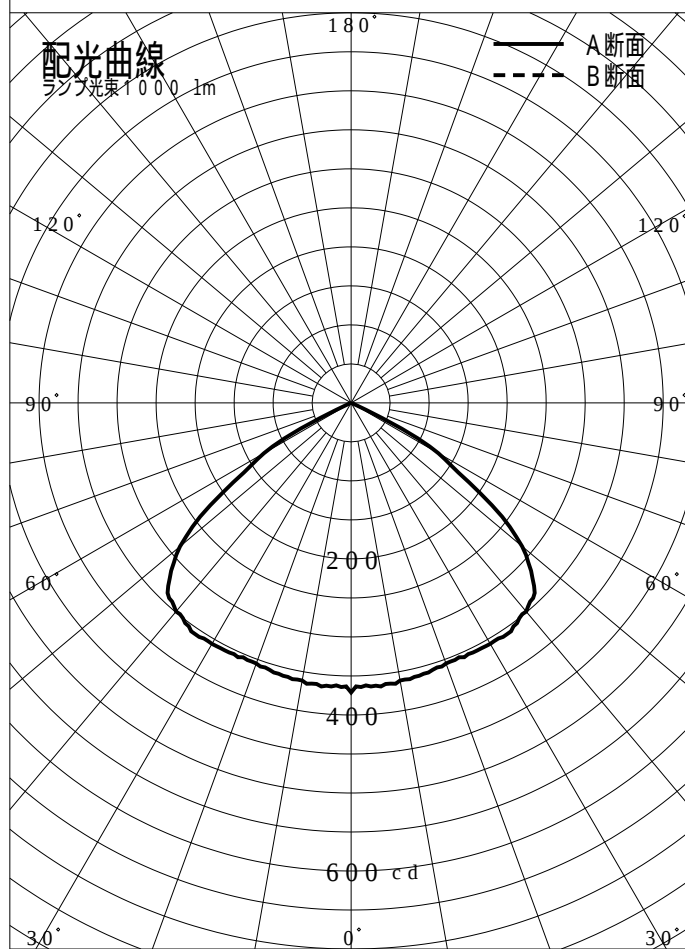

品番	NNF B87009		
名称			
光源	LED5000/98/1915		
管理番号	K0158792(1)DB1		
光束	1915lm x 1.00		
保守率	0.93		
適用品番	設計照度Eを得るための読取照度		
	E = 2.0	E = 1.0	E = 0.5
NNF B87009	1.1	0.6	0.3
備考	非常点灯時の照度 (		

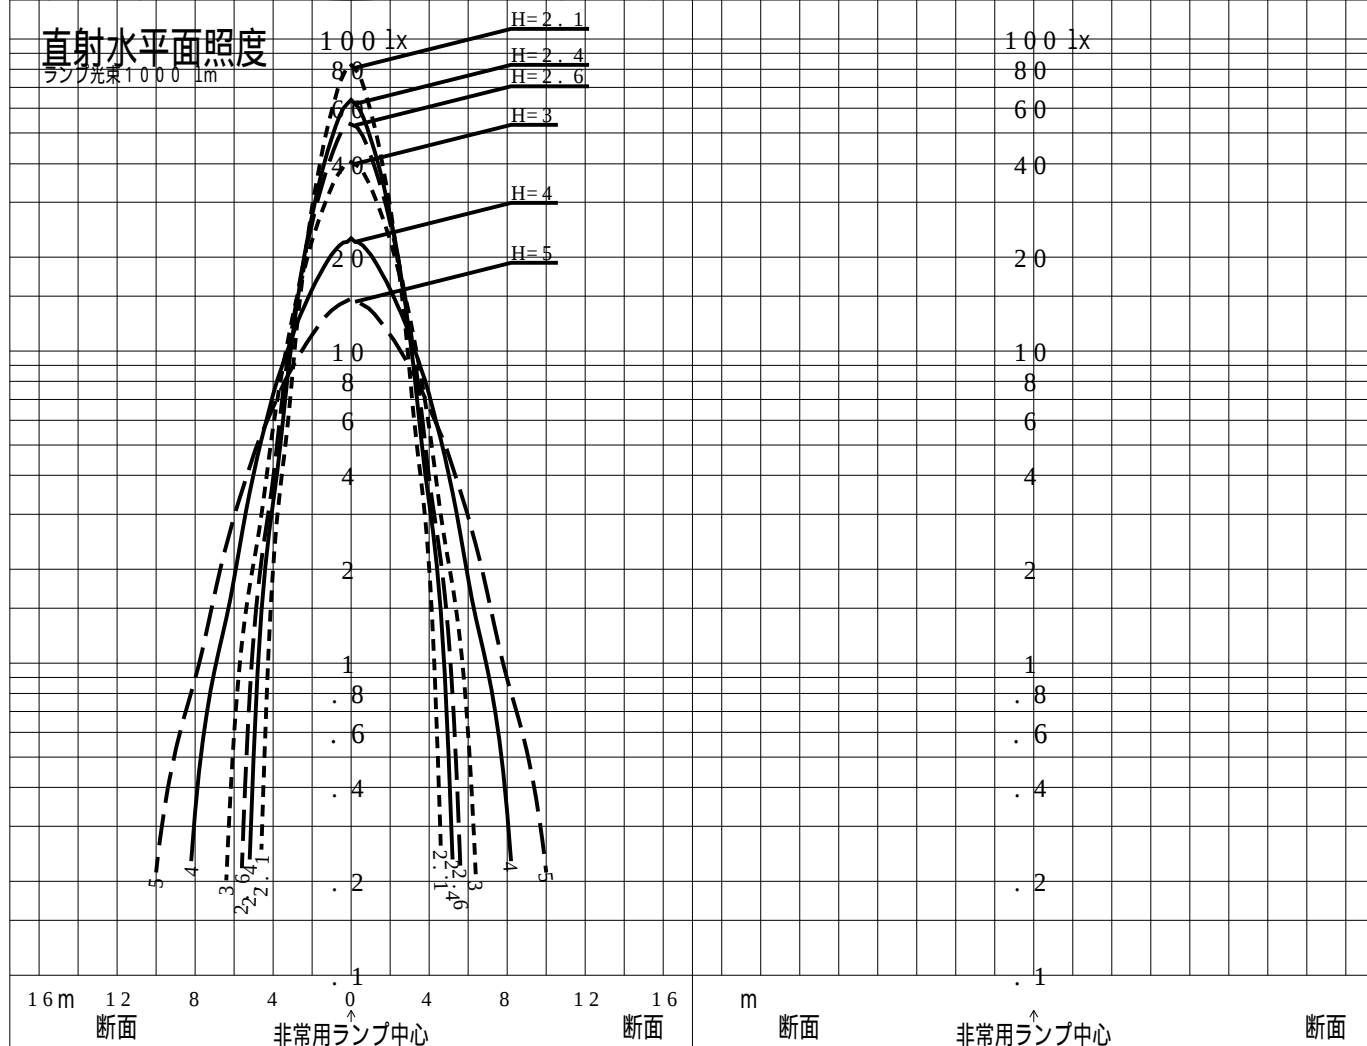

品番	NNF B8 7 0 0 9			
名称				
光源	L E D 5 0 0 0 / 9 8 / 1 9 1 5			
管理番号	K 0 1 5 8 7 9 2 (1 8) D B 1			
光束	1 9 1 5 . 0 l m * 1 . 0 0		備考	非常点灯時の照度 (
保守率	0 . 9 3			

非常灯配置表

器具取付高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単体配置	A1	4.2	4.4	4.6	4.7	4.9	5.0	5.2	5.3	5.5	5.6	5.8	5.9	6.0	6.1	6.3	6.4
直線配置	A2	8.5	9.0	9.4	9.7	10.1	10.4	10.7	11.2	11.5	11.9	12.2	12.6	12.9	13.2	13.6	13.9
四角配置	A4	6.5	6.8	7.0	7.3	7.6	7.9	8.1	8.4	8.7	8.9	9.2	9.4	9.7	10.0	10.2	10.5
壁からの距離 (最大)	A0	3.0	3.1	3.2	3.3	3.5	3.6	3.7	3.8	3.9	4.0	4.2	4.2	4.4	4.5	4.5	4.7

器具取付高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単体配置	A1	6.5	6.6	6.7	6.8	6.8	6.9	7.0	7.1	7.2	7.6	8.1	8.5	8.9	9.2	9.5	9.7
直線配置	A2	14.1	14.5	14.7	15.1	15.4	15.7	16.0	16.2	16.5	17.7	18.7	19.6	20.4	21.3	22.2	23.1
四角配置	A4	10.7	11.0	11.2	11.5	11.7	12.0	12.2	12.4	12.7	13.8	14.9	15.9	16.8	17.7	18.4	19.1
壁からの距離 (最大)	A0	4.7	4.8	4.9	5.0	5.1	5.1	5.2	5.3	5.4	5.6	5.7	5.8	5.9	6.0	6.2	6.5

器具取付高さ (m)		8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0
単体配置	A1	9.9	10.0	10.1	10.2	10.2	10.2	10.0	9.8	9.6	9.4	9.1	8.6	8.2	7.6	7.0	6.2
直線配置	A2	23.9	24.7	25.4	26.0	26.6	27.1	27.5	27.9	28.2	28.4	28.6	28.7	28.8	28.7	28.7	28.4
四角配置	A4	19.7	20.3	20.9	21.5	22.2	22.8	23.4	23.9	24.5	25.0	25.5	26.0	26.4	26.8	27.1	27.4
壁からの距離 (最大)	A0	6.8	7.0	7.2	7.4	7.4	7.4	7.4	7.2	7.0	6.8	6.5	6.2	5.9	5.4	4.7	3.7