

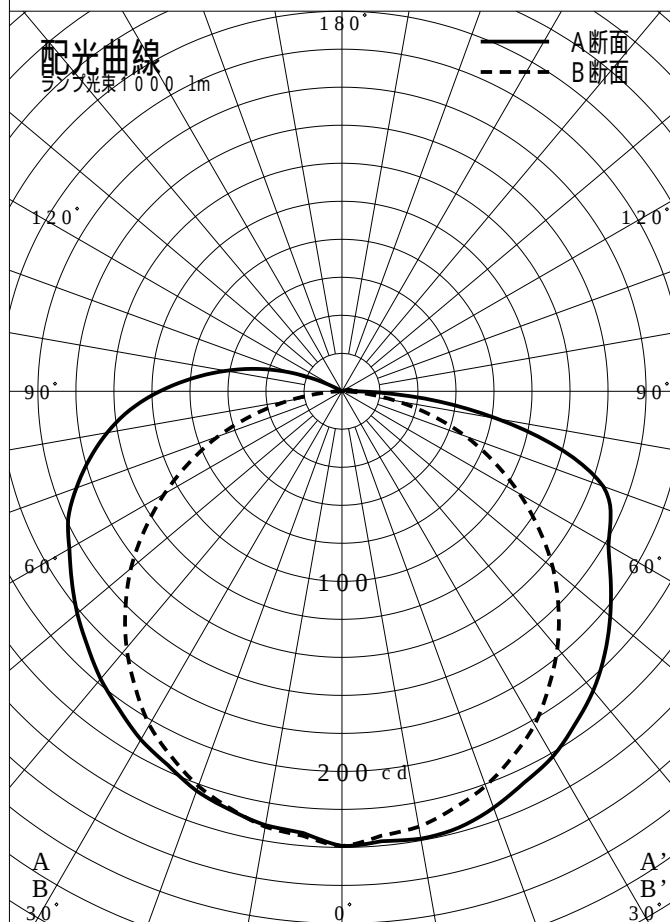


非常用照明器具特性

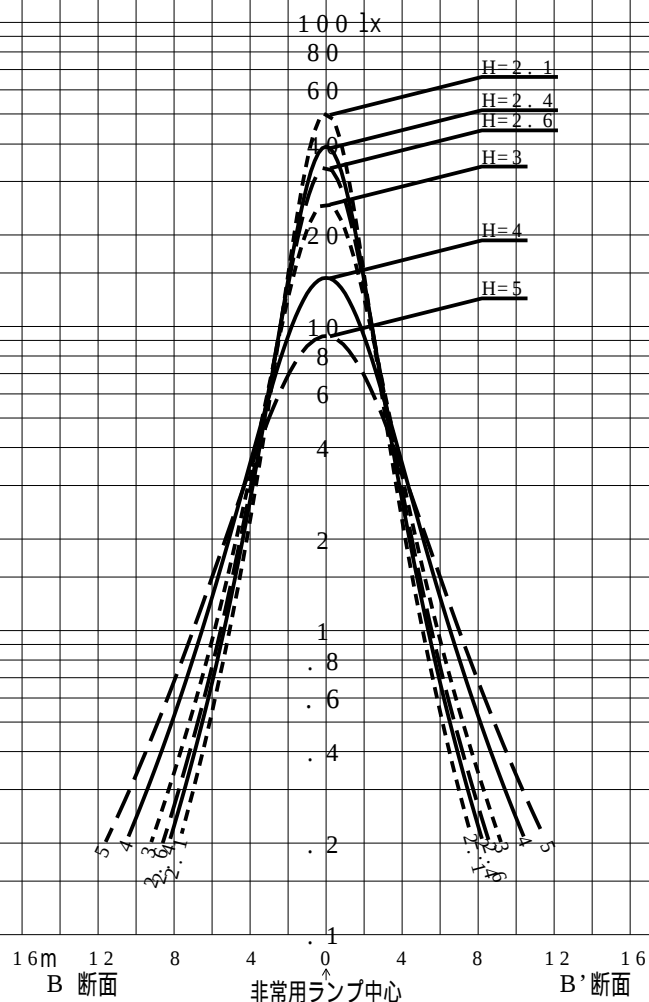

品番	NNF G4 2 2 3 0		
名称			
光源	LDL40 S. N/ 29/ 38 K(1900)		
管理番号	K0149117(5) DR1		
光束	1900lm x 1.00		
保守率	0.77		
適用品番	設計照度Eを得るための読取照度		
	E = 2.0	E = 1.0	E = 0.5
NNF G4 2 2 3 0	1.4	0.7	0.3
備考	非常点灯時の照度 (30 分後)		

直射水平面照度

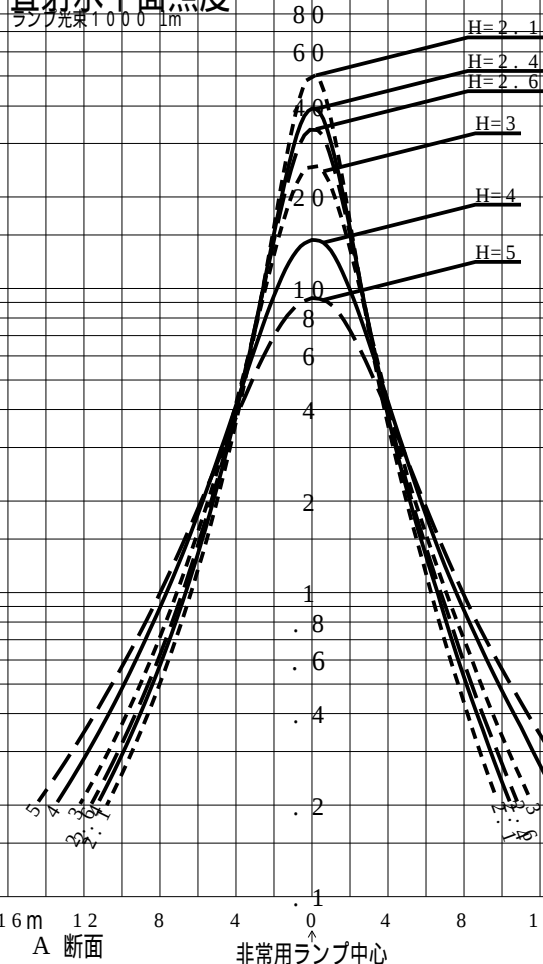

品番	NNF G4 2 2 3 0				
名称					
光源	L DL40 S. N/ 29/ 38 K(1900)				
管理番号	K0 1 4 9 1 1 7 (5) DR 1				
光束	1900.0 l m * 1.00			備考	非常点灯時の照度 (30分後)
保守率	0.77				

非常灯配置表

器具取付高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単体配置	A1	5.7	5.8	5.9	6.0	6.1	6.1	6.2	6.3	6.3	6.4	6.4	6.5	6.5	6.6	6.6	6.6
	A' 1	5.7	5.8	5.9	5.9	6.0	6.1	6.2	6.2	6.3	6.3	6.4	6.4	6.5	6.5	6.5	6.6
	B1	4.7	4.8	4.8	4.9	5.0	5.1	5.2	5.2	5.3	5.4	5.4	5.5	5.5	5.6	5.7	5.7
	B' 1	4.7	4.8	4.8	4.9	5.0	5.1	5.2	5.2	5.3	5.4	5.4	5.5	5.5	5.6	5.7	5.7
直線配置	A2	14.1	14.4	14.5	14.8	15.1	15.3	15.5	15.7	15.9	16.1	16.2	16.4	16.6	16.7	16.9	16.9
	B2	11.1	11.3	11.6	11.8	12.0	12.2	12.4	12.6	12.8	13.0	13.2	13.4	13.5	13.7	13.9	14.0
四角配置	A4	12.8	13.2	13.3	13.6	13.8	14.0	14.3	14.4	14.6	14.8	15.0	15.1	15.4	15.4	15.6	15.8
	B4	10.9	11.0	11.3	11.4	11.6	11.8	11.9	12.1	12.2	12.3	12.4	12.6	12.6	12.9	13.0	13.1
壁からの距離 (最大)	A0	2.4	2.8	2.5	2.8	2.8	2.7	3.2	3.2	3.1	3.2	3.4	3.3	3.6	3.5	3.6	3.6
	B0	2.8	2.8	3.0	2.8	2.9	2.9	2.9	2.9	3.0	2.9	2.9	3.0	2.9	3.0	3.0	2.9

器具取付高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単体配置	A1	6.7	6.7	6.7	6.8	6.8	6.8	6.9	6.9	6.9	7.0	7.1	7.1	7.1	7.0	6.9	6.8
	A' 1	6.6	6.7	6.7	6.7	6.8	6.8	6.8	6.9	6.9	7.0	7.1	7.1	7.1	7.1	7.1	7.0
	B1	5.8	5.8	5.9	5.9	5.9	6.0	6.0	6.1	6.1	6.2	6.4	6.4	6.5	6.4	6.4	6.3
	B' 1	5.8	5.8	5.9	5.9	5.9	6.0	6.0	6.1	6.1	6.2	6.4	6.4	6.5	6.4	6.4	6.3
直線配置	A2	17.2	17.3	17.4	17.5	17.6	17.8	17.9	18.0	18.1	18.5	18.8	19.2	19.4	19.6	19.8	19.9
	B2	14.2	14.3	14.5	14.6	14.8	14.9	15.0	15.2	15.3	15.9	16.4	16.8	17.2	17.5	17.7	17.9
四角配置	A4	16.0	16.2	16.2	16.4	16.5	16.6	16.7	16.8	16.8	17.3	17.8	18.2	18.4	18.8	19.0	19.2
	B4	13.1	13.2	13.4	13.5	13.6	13.8	13.8	14.0	14.1	14.6	15.0	15.4	15.9	16.2	16.6	16.9
壁からの距離 (最大)	A0	3.7	3.8	3.7	3.9	3.8	3.8	3.8	3.7	3.9	4.0	3.9	3.6	3.6	3.6	3.4	3.2
	B0	2.9	2.9	3.0	2.9	3.0	3.0	2.9	3.0	3.1	3.0	2.9	2.9	3.0	2.9	2.9	2.6

器具取付高さ (m)		8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0						
単体配置	A1	6.6	6.4	6.1	5.8	5.4	4.9	4.4	3.7	2.8	1.1						
	A' 1	6.8	6.6	6.4	6.1	5.7	5.3	4.8	4.2	3.4	1.9						
	B1	6.2	6.0	5.8	5.6	5.2	4.8	4.3	3.7	2.8	1.3						
	B' 1	6.2	6.0	5.8	5.6	5.2	4.8	4.3	3.7	2.8	1.3						
直線配置	A2	20.0	20.0	19.9	19.8	19.7	19.5	19.2	18.9	18.5	17.9						
	B2	18.0	18.1	18.1	18.1	18.0	17.8	17.6	17.4	17.0	16.7						
四角配置	A4	19.4	19.6	19.7	19.8	19.7	19.5	19.2	18.9	18.5	17.9						
	B4	17.2	17.4	17.7	17.8	18.0	17.8	17.6	17.4	17.0	16.7						
壁からの距離 (最大)	A0	2.9	2.7	2.1	1.8	1.3	1.1	1.0	1.1	1.1	1.1						
	B0	2.4	2.0	1.9	1.3	1.2	1.2	1.3	1.2	1.2	1.3						