



屋外照明器具特性

品番(品名)	XY2887		
光源	LDT6L-G-E17/S/T6 ×1	810.0 lm	
管理番号	K0168149(1)DB1		

JISC8131-1999 による配光形式			
器具効率	64.4%	直下光度	0.0 cd/1000lm
上方光束	32.1%	最大光度	71.4 cd/1000lm
下方光束	32.3%		

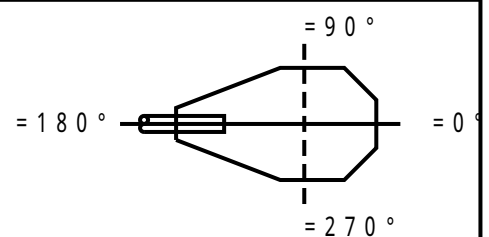

鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	0	0	1	4	10	17	24	31	38	43	49	54	58	62	65	68	69	71	71
90°	0	0	1	4	10	17	24	31	38	43	49	54	58	62	65	68	69	71	71
180°	0	0	1	4	10	17	24	31	38	43	49	54	58	62	65	68	69	71	71
270°	0	0	1	4	10	17	24	31	38	43	49	54	58	62	65	68	69	71	71
I _{max} を含む鉛直面	0	0	1	4	10	17	24	31	38	43	49	54	58	62	65	68	69	71	71

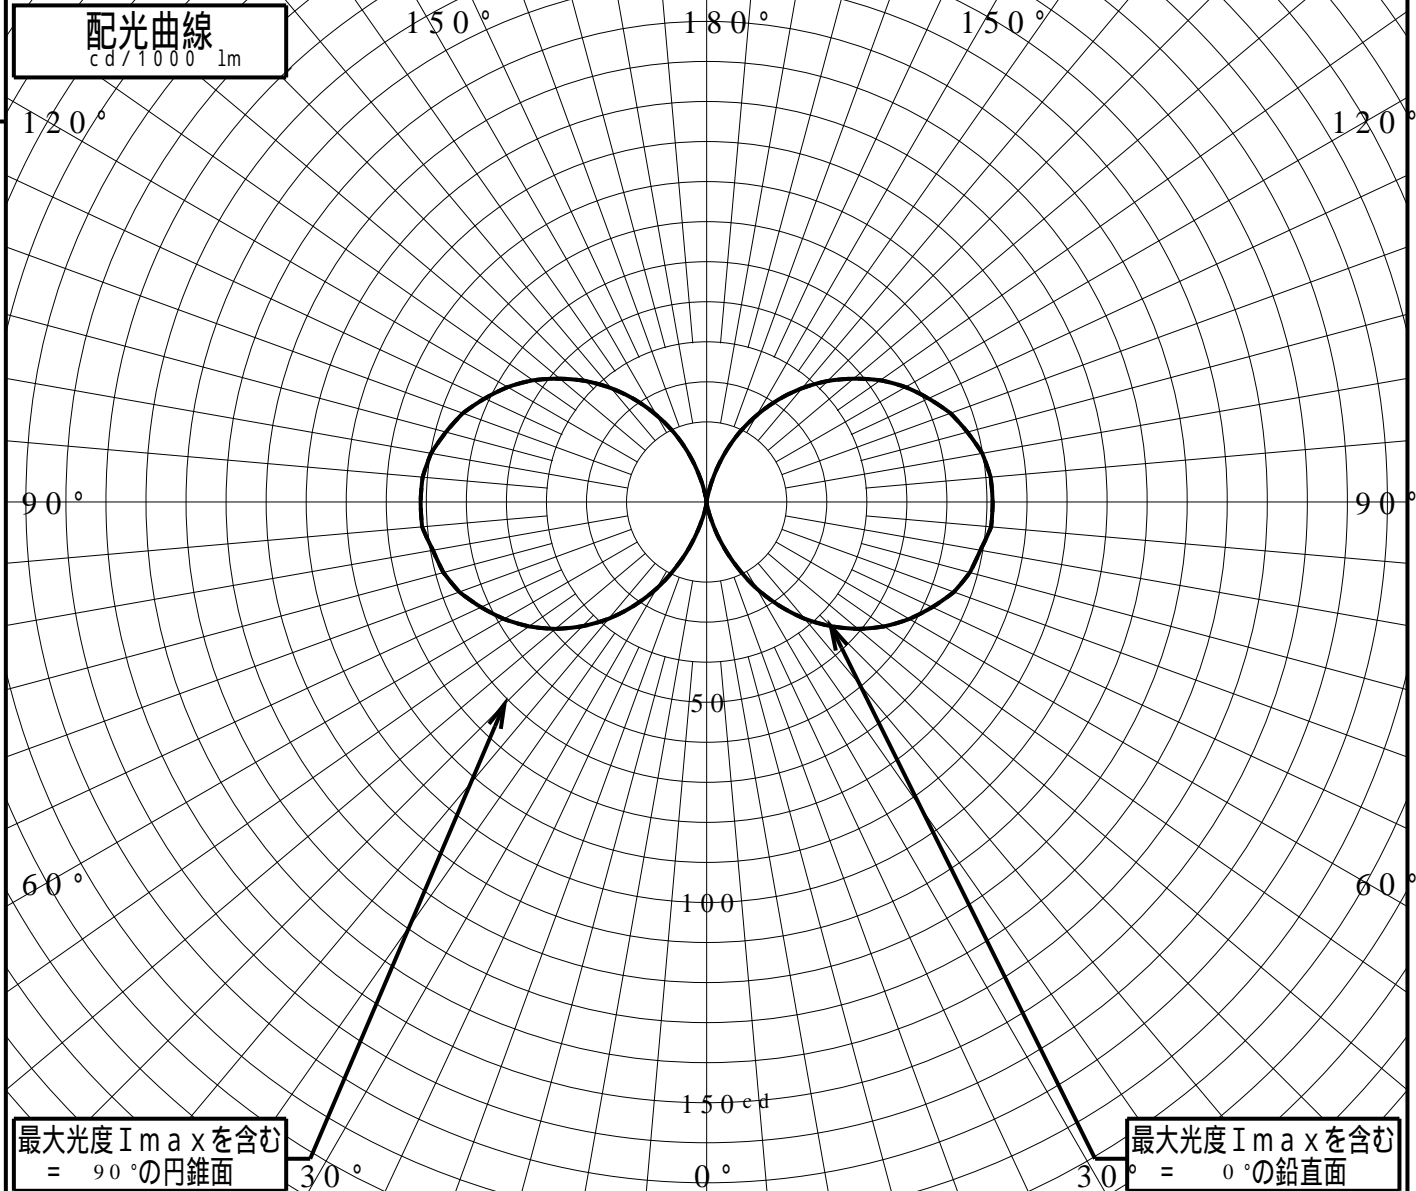


道路・トンネル照明率曲線

品番(品名)	XY2887	光源	LDT6L-G-E17/S/T6 x1
管理番号	K0168149 (1)DB 1		

————— = 0.0°

H: 取付高さ(MOUNTING HEIGHT)

照明率(= 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.011	0.011
0.4H	0.023	0.023
0.6H	0.035	0.035
0.8H	0.047	0.047
1.0H	0.059	0.059
1.2H	0.068	0.068
1.4H	0.077	0.077
1.6H	0.084	0.084
1.8H	0.090	0.090
2.0H	0.096	0.096
2.2H	0.100	0.100
2.4H	0.104	0.104
2.6H	0.108	0.108
2.8H	0.111	0.111
3.0H	0.114	0.114
3.2H	0.116	0.116
3.4H	0.118	0.118
3.6H	0.120	0.120

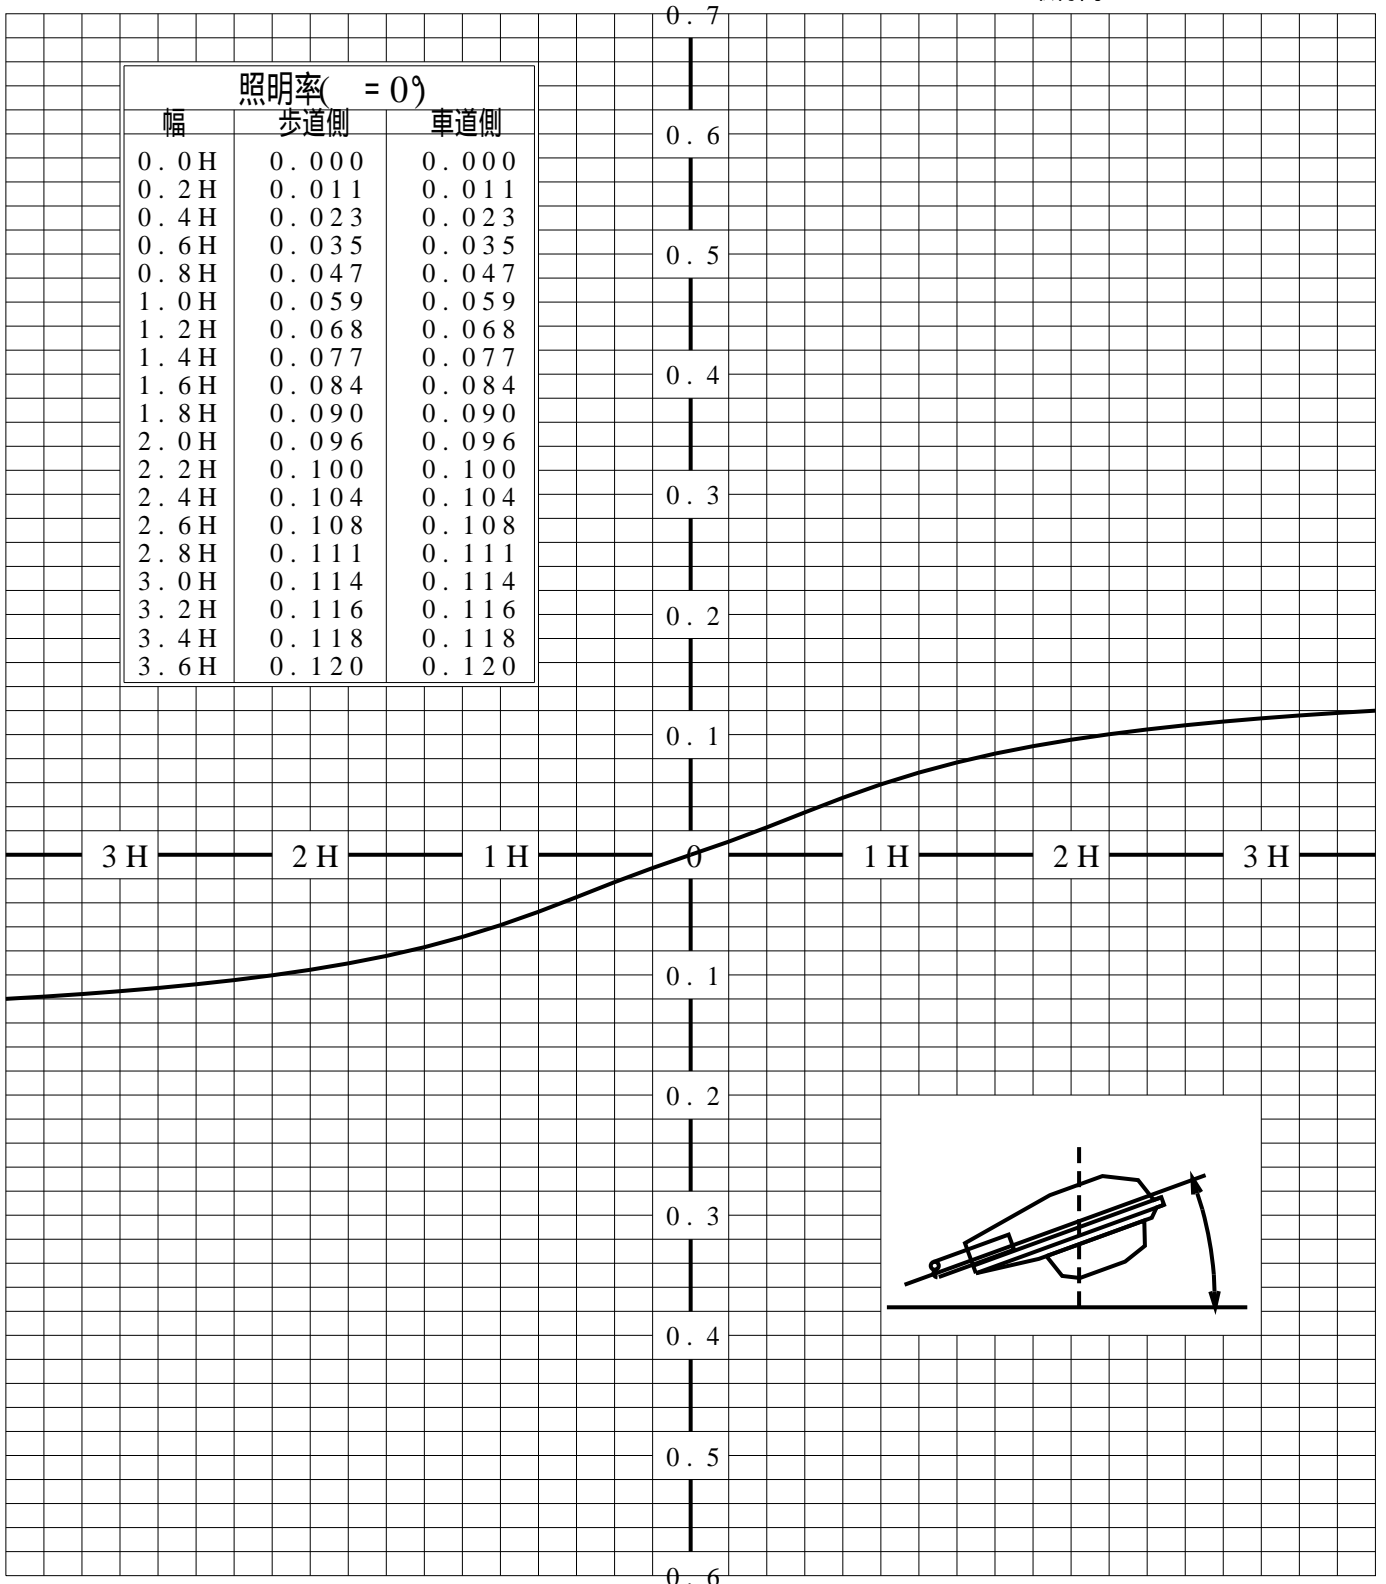

歩道側 ← → 車道側