

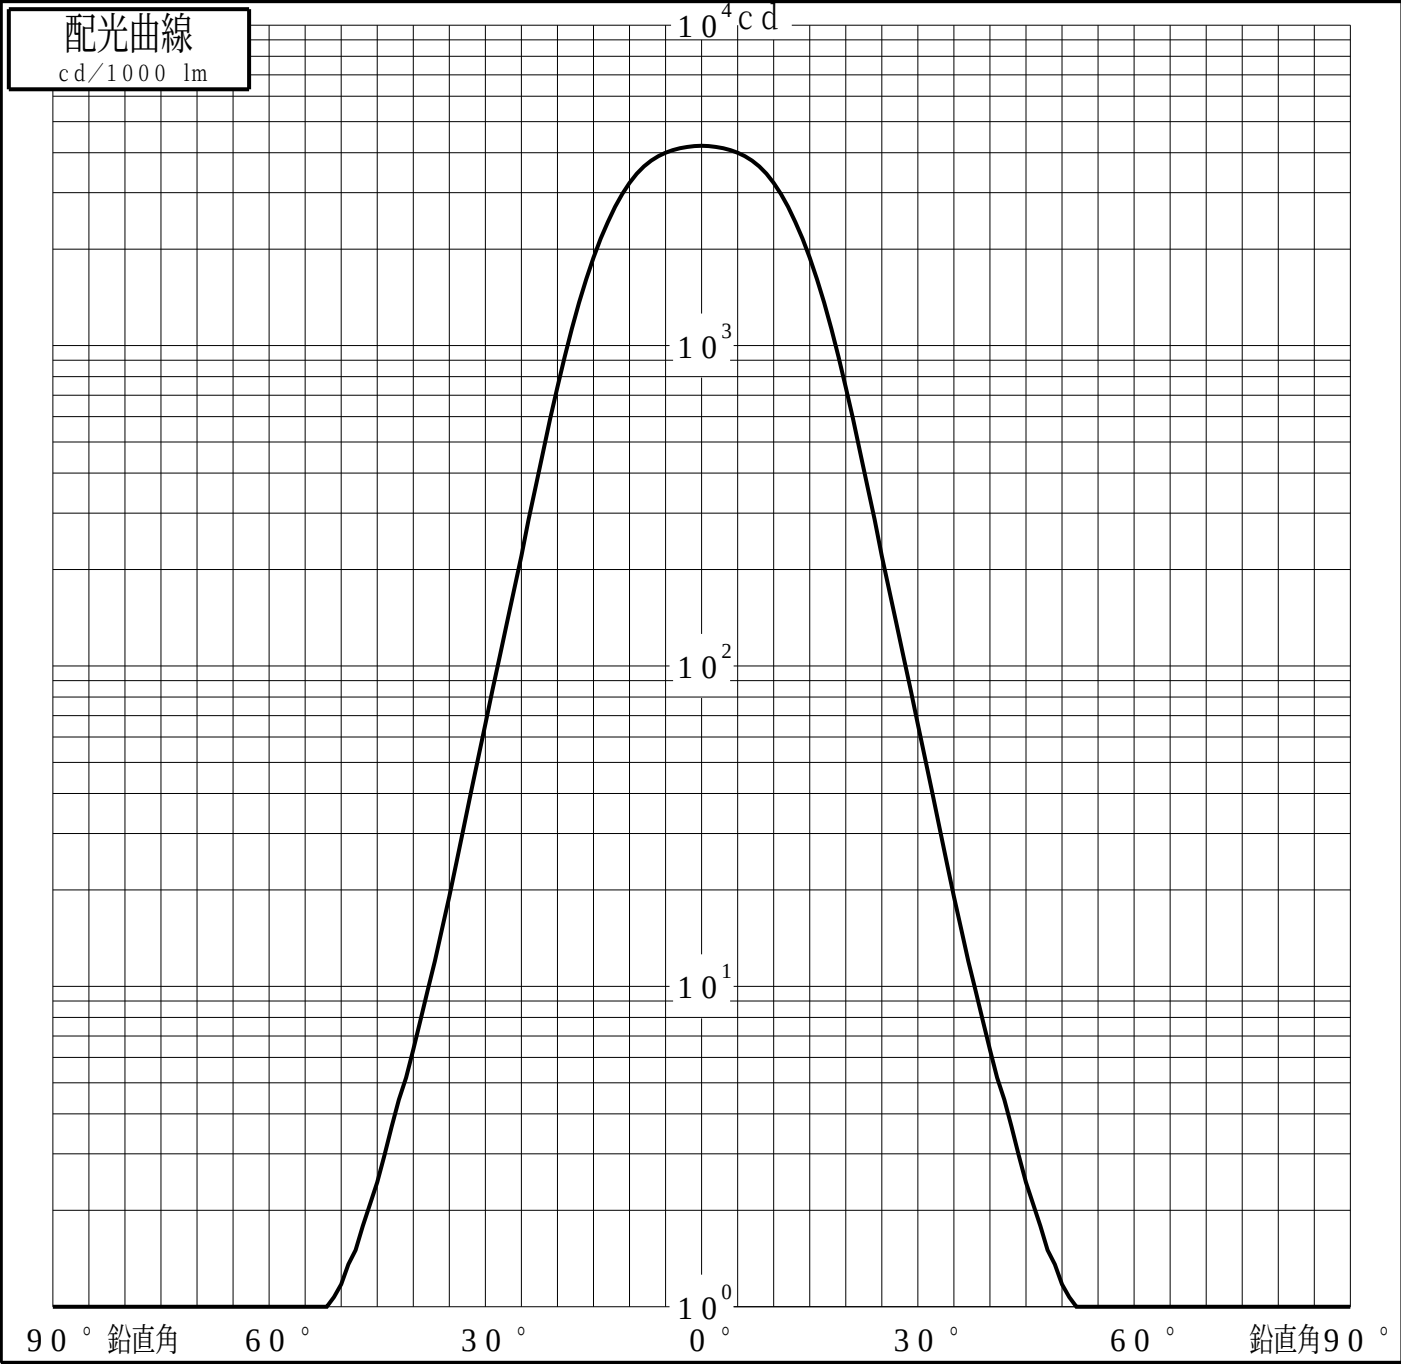
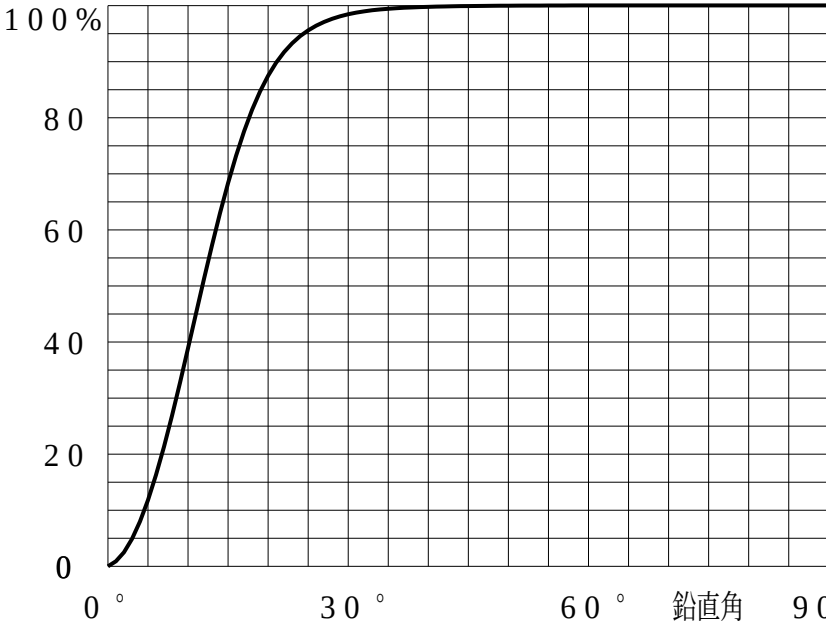


投光照明器具特性		
品名（品番）	NYY1 2 0 2 4 + NTS 9 5 1 0 0	
光源	LED2700_70_600 ×1 600.0 l m	
管理番号	K0171989(4) DJ 1 TF	

配光の区分・種類	軸対称配光 中角形	主ビーム効率	98.3 %			
器具点灯角度		ビーム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.0 %	ビーム効率	61.2%	91.6%	95.9%	
最大光度	4205 cd/1000 lm	ビーム角	28.4	44.9	50.4	



投光照明器具特性						
品番 (品名)	NY Y 1 2 0 2 4 + N T S 9 5 1 0 0	光源	LED 2 7 0 0 _ 7 0 _ 6 0 0 × 1			
管理番号	K 0 1 7 1 9 8 9 (4) D J 1 T F					
累積光束曲線						
100 %  0 ° 3 0 ° 6 0 ° 鉛直角 9 0 °						
等光度曲線 (α β座標系) cd / 1 0 0 0 lm						
		6 0 °				
		4 0 °				
		2 0 °				
8 0 °	6 0 °	4 0 °	2 0 °			
			2 0 °	4 0 °	6 0 °	8 0 °
		2 0 °				
		4 0 °				
		6 0 °				