

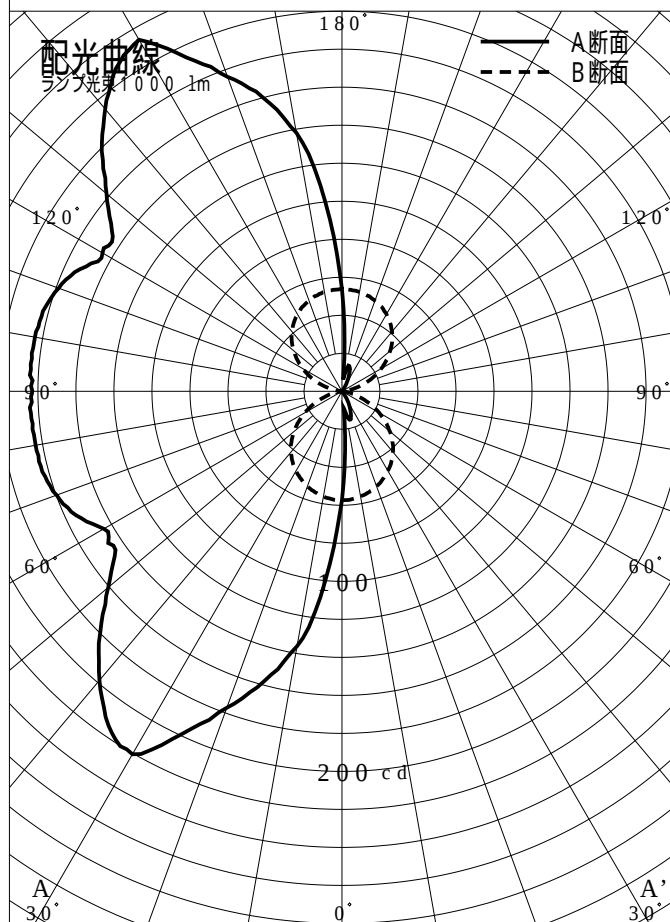


非常用照明器具特性

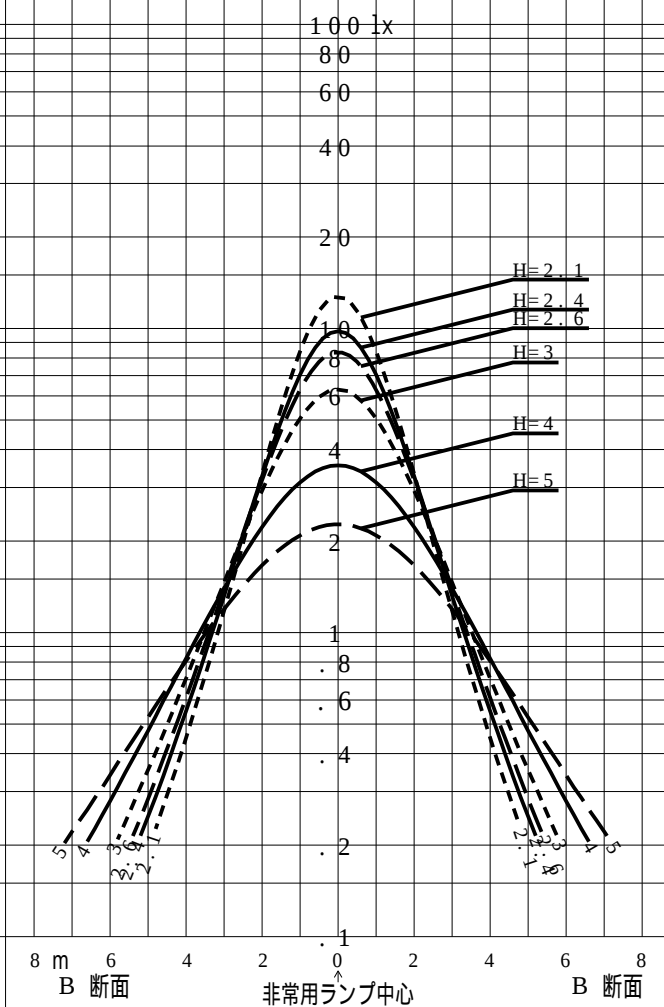

品番	NNF F 2 1 8 6 5 T		
名称			
光源	LDL20S. N/ 11/ 12 - K(510)		
管理番号	K0 1 7 2 8 6 2 (3) DR1		
光束	510lm x 1.00		
保守率	0.77		
適用品番	設計照度Eを得るための読取照度		
	E= 2.0	E= 1.0	E= 0.5
NNF F 2 1 8 6 5 T	5.1	2.5	1.3
備考	非常点灯時の照度 (60 分後)		

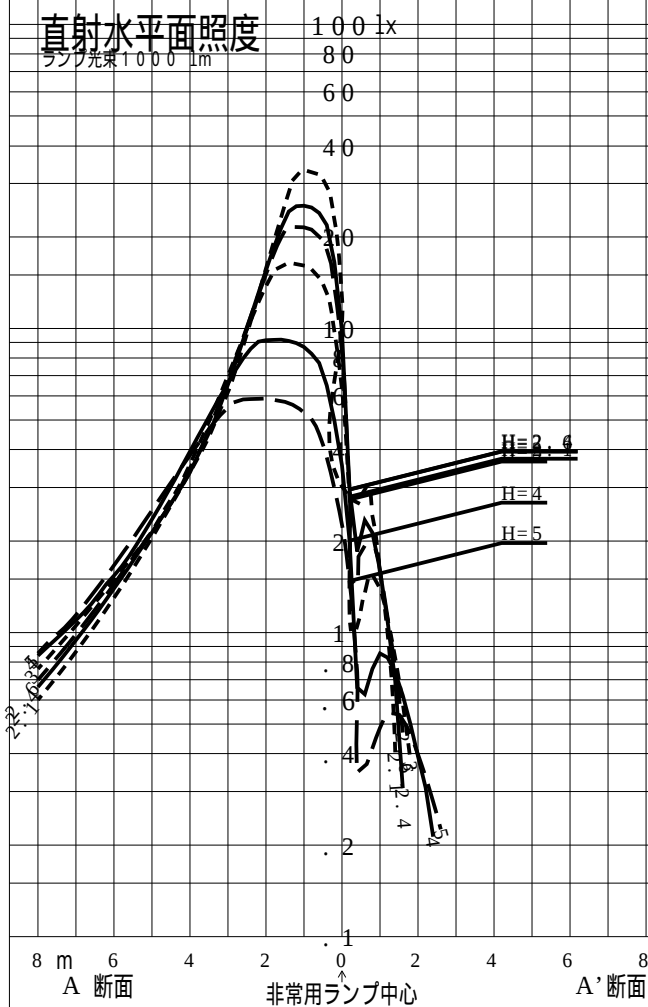

品番	NNF F 2 1 8 6 5 T		
名称			
光源	LDL20S. N/ 1 1 / 1 2 - K(5 1 0)		
管理番号	K0 1 7 2 8 6 2 (3) DR 1		
光束	5 1 0 . 0 l m * 1 . 0 0	備考	非常点灯時の照度 (6 0 分後)
保守率	0 . 7 7		

非常灯配置表

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

階段配置表

器具取付高さ (m)			1 . 0	1 . 5	2 . 0	2 . 5	3 . 0					
Y= 1 . 0 (m)	2 . 0 L x	X+	2 . 7	2 . 9	3 . 0	3 . 1	3 . 3					
		X-	0 . 1	0 . 1	0 . 1	0 . 0	0 . 0					
	1 . 0 L x	X+	3 . 6	4 . 1	4 . 3	4 . 4	4 . 5					
Y= 1 . 5 (m)												
Y= 2 . 0 (m)												