



非常用照明器具特性

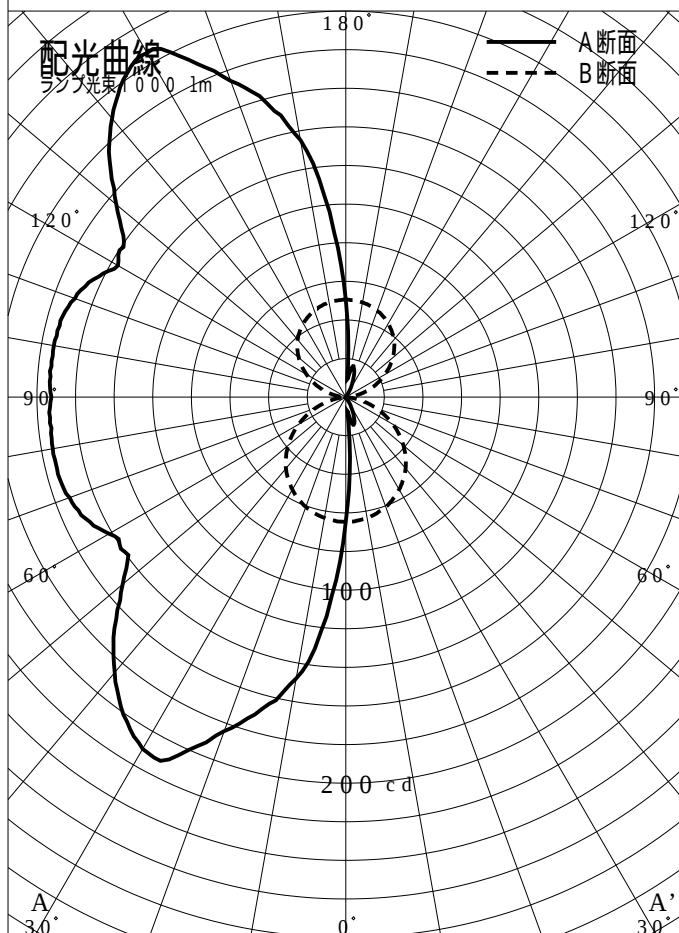

品番	NNF F 4 1 8 6 5 T		
名称			
光源	LDL40S. N/ 29 / 38K(790)		
管理番号	K0172855(4) DR1		
光束	790lm x 1.00		
保守率	0.77		
適用品番	設計照度Eを得るための読取照度		
	E = 2.0	E = 1.0	E = 0.5
NNFF41865T	3.3	1.6	0.8
備考	非常点灯時の照度 (60 分後)		

直射水平面照度

ランプ光束 1000 lm

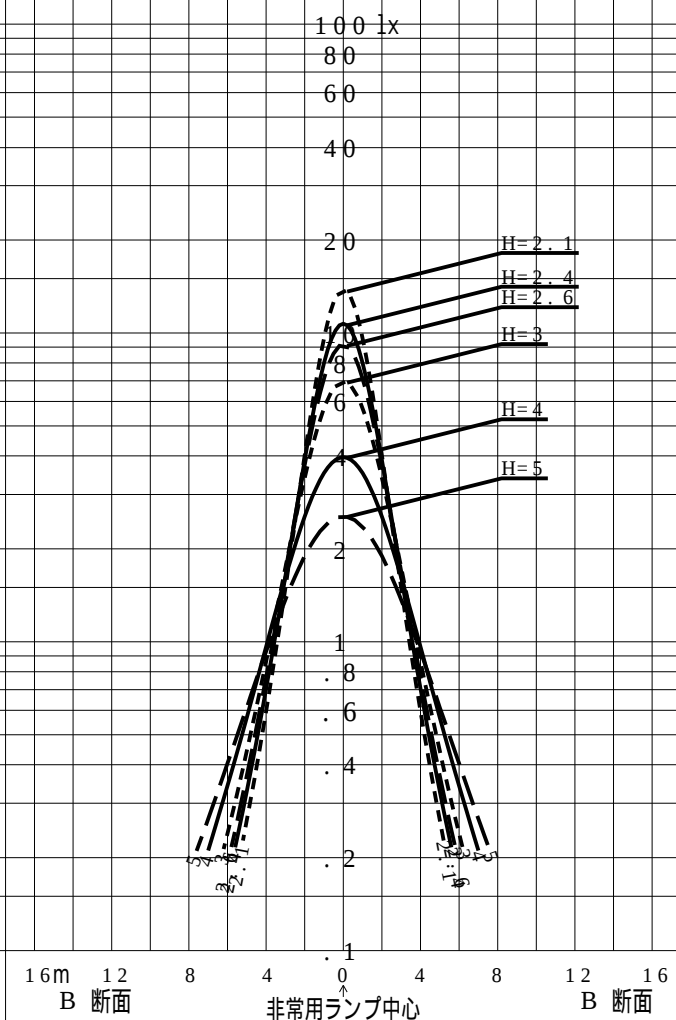

品番	NNF F 4 1 8 6 5 T		
名称			
光源	LDL40S. N/ 29/ 38K(790)		
管理番号	K0172855(4) DR 1		
光束	790.0 l m * 1.00	備考	非常点灯時の照度 (60分後)
保守率	0.77		

非常灯配置表

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

階段配置表

器具取付高さ (m)			1.0	1.5	2.0	2.5	3.0	4.0				
Y=1.0 (m)	2.0Lx	X+	3.2	3.6	3.7	3.8	3.9	4.1				
		X-	0.2	0.1	0.1	0.1	0.1	0.0				
	1.0Lx	X+	4.2	4.8	5.1	5.4	5.5	5.5				
Y=1.5 (m)	2.0Lx	X+	2.9	3.3	3.5	3.6	3.7					
		X-	0.1	0.1	0.1	0.1	0.1					
	1.0Lx	X+	4.0	4.6	5.0	5.2	5.3					
Y=2.0 (m)												