

# 屋外照明器具特性


品番(品名)	YYY16151																		
光源	LLD40001CQ1 x1 845.0 lm																		
管理番号	K0181043 (1) DR 1																		
JIS C8131-1999 による配光形式	SEMI CUT-OFF																		
器具効率	19.0 %				直下光度				0.0 cd / 1000lm										
上方光束	6.7%				最大光度				26.4 cd / 1000lm										
下方光束	12.3%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
= 0° 鉛直面	0	0	0	0	2	5	8	11	15	18	20	22	24	25	26	25	25	24	21
90°	0	0	0	0	2	5	8	11	15	18	20	22	24	25	26	25	25	24	21
180°	0	0	0	0	2	5	8	11	15	18	20	22	24	25	26	25	25	24	21
270°	0	0	0	0	2	5	8	11	15	18	20	22	24	25	26	25	25	24	21
I <sub>max</sub> を含む鉛直面	0	0	0	0	2	5	8	11	15	18	20	22	24	25	26	25	25	24	21
配光曲線 cd / 1000 lm					150°				180°				150°				120°		
					120°				90°				150°				60°		
					60°				30°				20°				10°		
					30°				40°				50°				60°		
					70°				80°				90°				100°		
					110°				120°				130°				140°		
					150°				160°				170°				180°		
					190°				200°				210°				220°		
					230°				240°				250°				260°		
					270°				280°				290°				300°		
					310°				320°				330°				340°		
					350°				360°				370°				380°		
					390°				400°				410°				420°		
					430°				440°				450°				460°		
					470°				480°				490°				500°		
					510°				520°				530°				540°		
					550°				560°				570°				580°		
					590°				600°				610°				620°		
					630°				640°				650°				660°		
					670°				680°				690°				700°		
					710°				720°				730°				740°		
					750°				760°				770°				780°		
					790°				800°				810°				820°		
					830°				840°				850°				860°		
					870°				880°				890°				900°		
					910°				920°				930°				940°		
					950°				960°				970°				980°		
					990°				1000°				1010°				1020°		
					1030°				1040°				1050°				1060°		
					1070°				1080°				1090°				1100°		
					1110°				1120°				1130°				1140°		
					1150°				1160°				1170°				1180°		
					1190°				1200°				1210°				1220°		
					1230°				1240°				1250°				1260°		
					1270°				1280°				1290°				1300°		
					1310°				1320°				1330°				1340°		
					1350°				1360°				1370°				1380°		
					1390°				1400°				1410°				1420°		
					1430°				1440°				1450°				1460°		
					1470°				1480°				1490°				1500°		
					1510°				1520°				1530°				1540°		

# 道路・トンネル照明率曲線

品番(品名)	YYY16151	光源	LLD40001CQ1 × 1
管理番号	K0181043 (1) DR 1		

— = 0.0°

H: 取付高さ(MOUNTING HEIGHT)

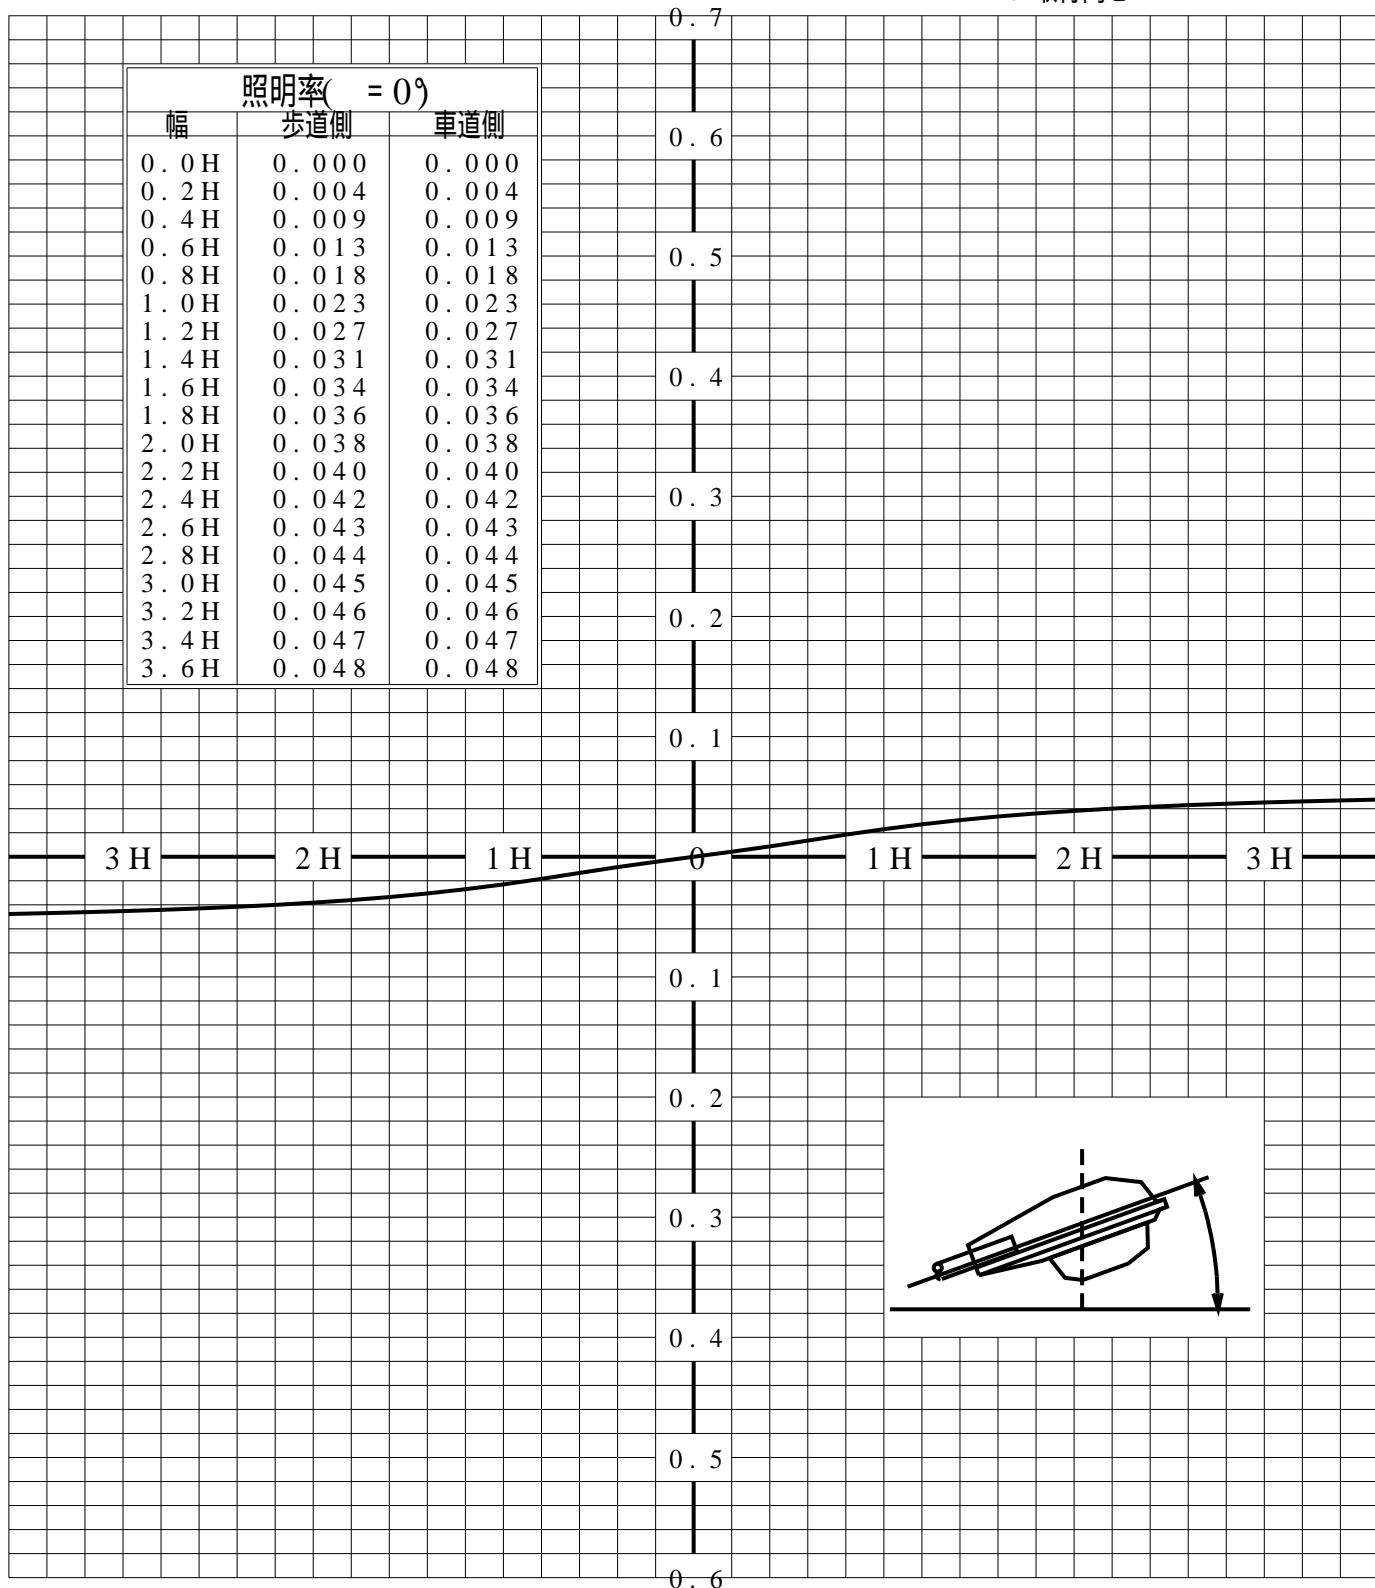


歩道側



車道側

# 等照度曲線

品番(品名)	YYY16151	全光束	845 lm
		保守率	1.00
光源	LLD40001CQ1 x1	取付高さ	0.1 m
		取付角度	0.0 °
管理番号	K0181043 (1) DR 1	最大照度	284.1 lx

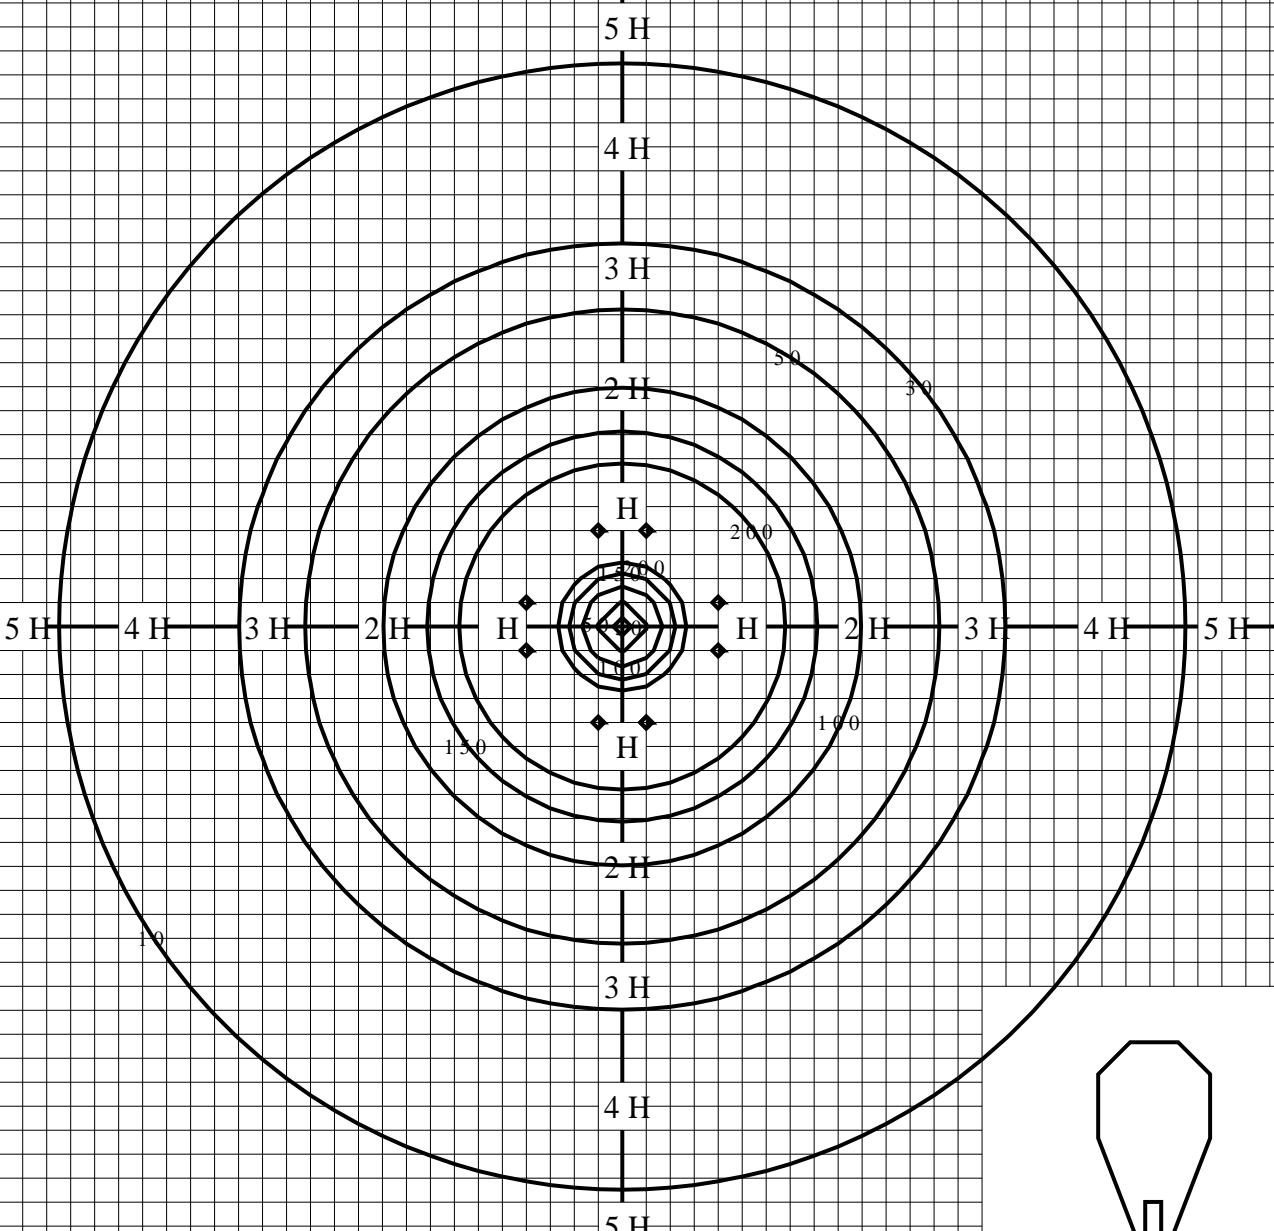

◆ 印は最大照度の位置を示す。

単位：lx

取付高さが異なる場合は照度の値に下表の補正係数を掛けて下さい。

H : 取付高さ

取付高さ	1 m	2 m	3 m	4 m	5 m	6 m	7 m	8 m	9 m	10 m
補正係数	0.019	0.004	0.002	0.001	0.000	0.000	0.000	0.000	0.000	0.000