


屋外照明器具特性

品番(品名)	XYT2006R																		
光源	LED2700_70_470 x1	470.0 lm																	
管理番号	K0172104(0)DR1																		
JISC8131-1999 による配光形式																			
器具効率	100.0%	直下光度	0.0 cd/1000lm																
上方光束	1.6%	最大光度	307.1 cd/1000lm																
下方光束	98.4%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	0	0	1	3	18	101	180	224	264	307	302	279	246	198	131	88	50	21	8
90°	0	0	1	3	18	101	180	224	264	307	302	279	246	198	131	88	50	21	8
180°	0	0	1	3	18	101	180	224	264	307	302	279	246	198	131	88	50	21	8
270°	0	0	1	3	18	101	180	224	264	307	302	279	246	198	131	88	50	21	8
I _{max} を含む鉛直面	0	0	1	3	18	101	180	224	264	307	302	279	246	198	131	88	50	21	8

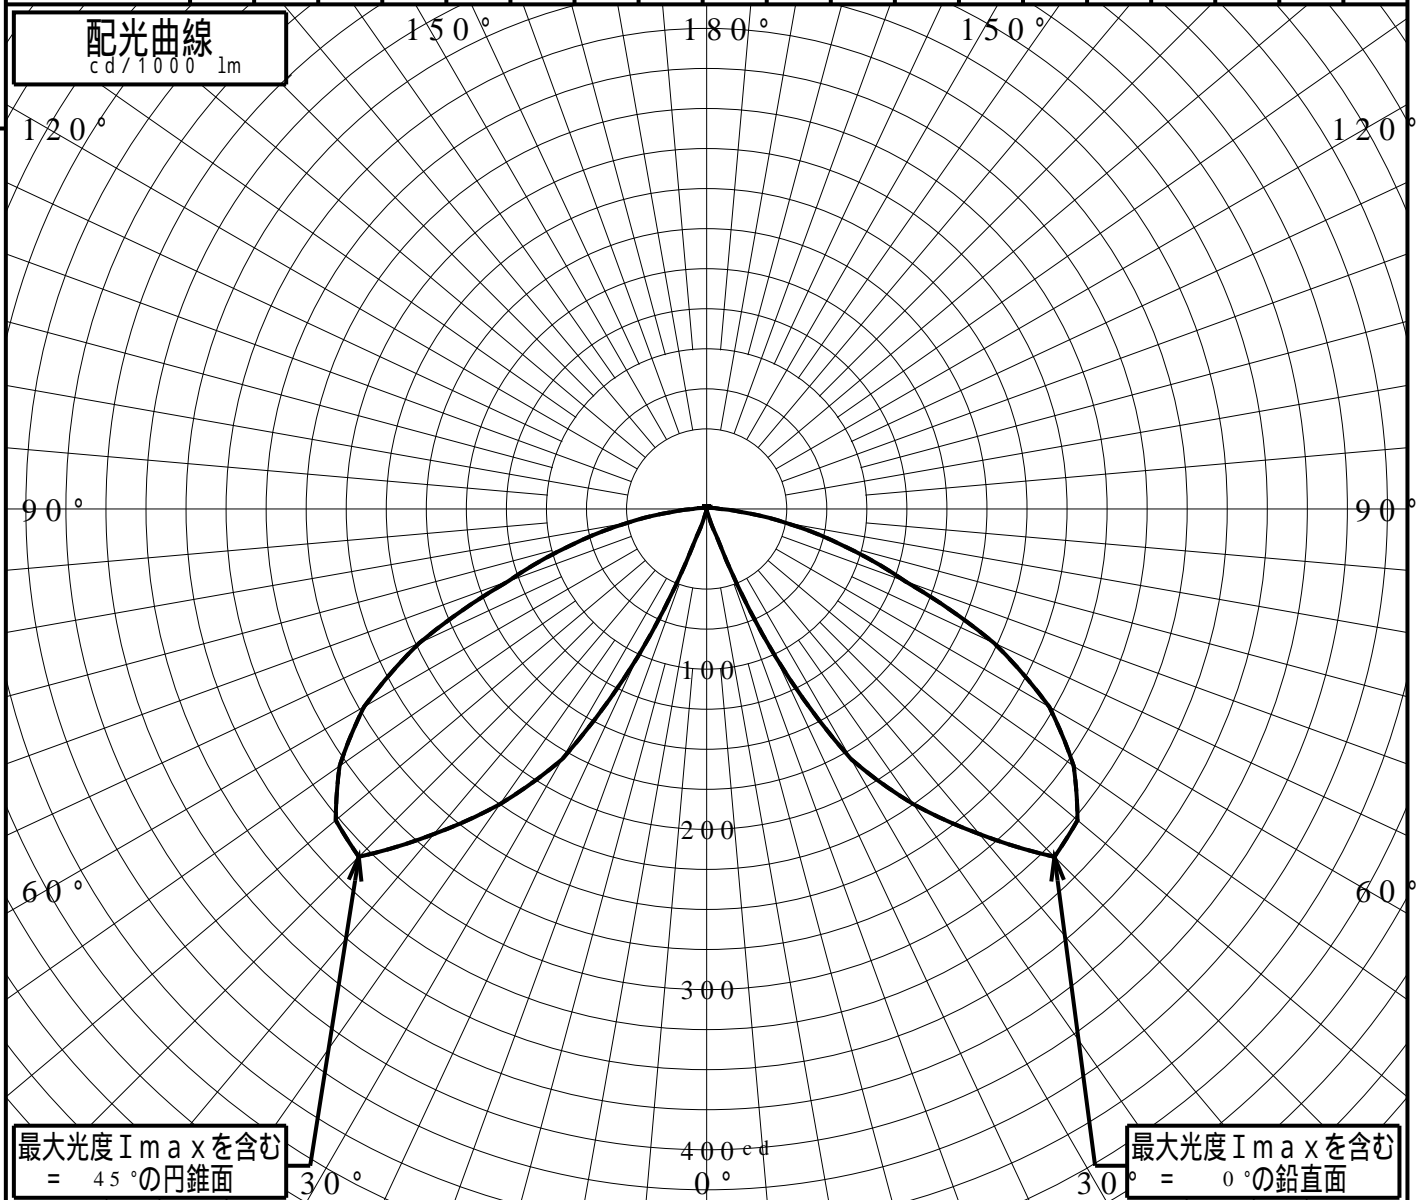


道路・トンネル照明率曲線

品番(品名)	XYT2006R	光源	LED2700_70_470 ×1
管理番号	K0172104 (0)DR 1		

————— = 0.0°

H: 取付高さ

照明率(= 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.053	0.053
0.4H	0.111	0.111
0.6H	0.178	0.178
0.8H	0.243	0.243
1.0H	0.299	0.299
1.2H	0.343	0.343
1.4H	0.376	0.376
1.6H	0.401	0.401
1.8H	0.420	0.420
2.0H	0.434	0.434
2.2H	0.444	0.444
2.4H	0.452	0.452
2.6H	0.458	0.458
2.8H	0.463	0.463
3.0H	0.466	0.466
3.2H	0.469	0.469
3.4H	0.472	0.472
3.6H	0.474	0.474

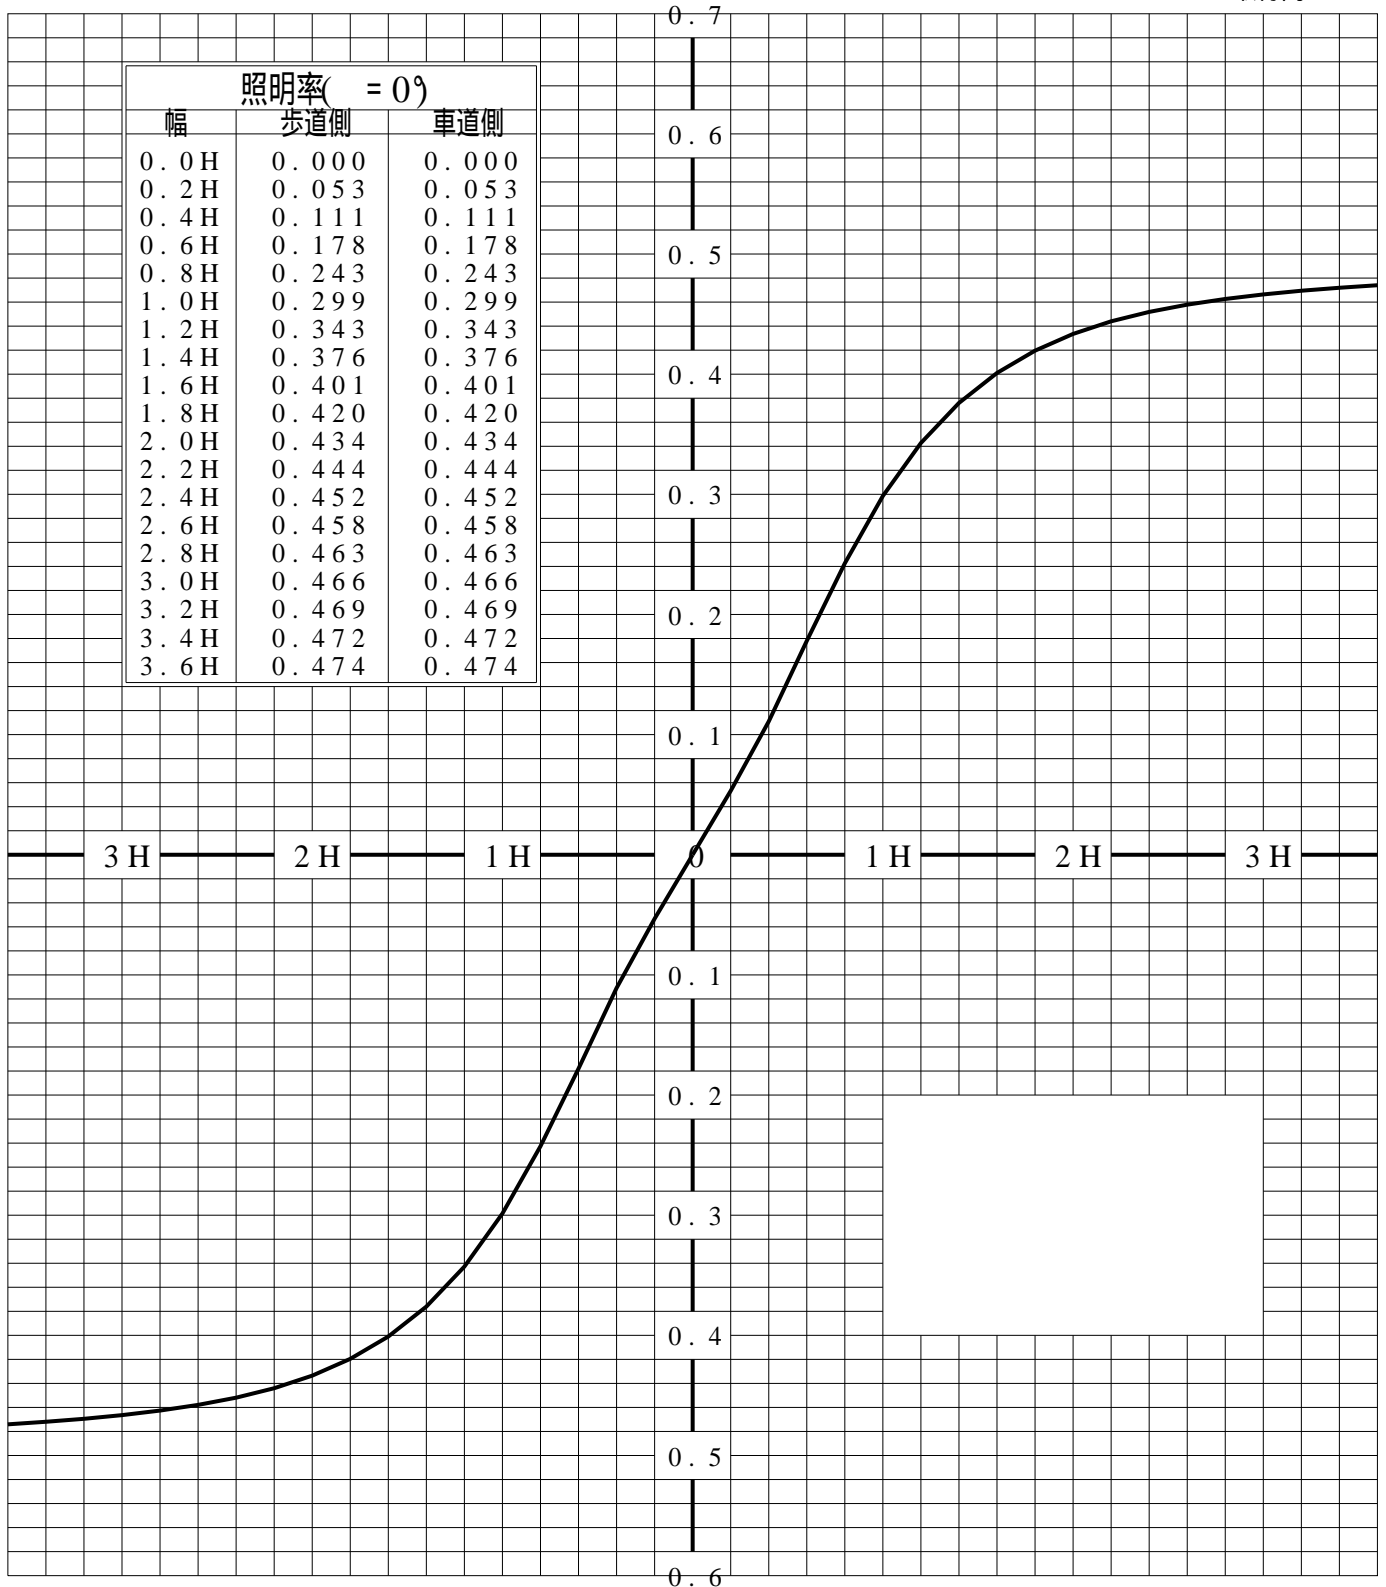

歩道側 ← → 車道側