

屋外照明器具特性

品番(品名)	XYT2001R																		
光源	LED2700_70_680 x1	680.0 lm																	
管理番号	K0172103(0)DR1																		
JISC8131-1999 による配光形式																			
器具効率	100.0%	直下光度	0.0 cd/1000lm																
上方光束	18.4%	最大光度	233.5 cd/1000lm																
下方光束	81.7%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	0	1	2	4	16	77	135	168	200	233	231	217	196	162	116	89	63	43	34
90°	0	1	2	4	16	77	135	168	200	233	231	217	196	162	116	89	63	43	34
180°	0	1	2	4	16	77	135	168	200	233	231	217	196	162	116	89	63	43	34
270°	0	1	2	4	16	77	135	168	200	233	231	217	196	162	116	89	63	43	34
I _{max} を含む鉛直面	0	1	2	4	16	77	135	168	200	233	231	217	196	162	116	89	63	43	34




道路・トンネル照明率曲線

品番(品名)	XYT2001R	光源	LED2700_70_680 ×1
管理番号	K0172103 (0)DR 1		

————— = 0.0°

H: 取付高さ

照明率(= 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.042	0.042
0.4H	0.087	0.087
0.6H	0.138	0.138
0.8H	0.189	0.189
1.0H	0.232	0.232
1.2H	0.267	0.267
1.4H	0.294	0.294
1.6H	0.314	0.314
1.8H	0.330	0.330
2.0H	0.341	0.341
2.2H	0.351	0.351
2.4H	0.358	0.358
2.6H	0.363	0.363
2.8H	0.368	0.368
3.0H	0.371	0.371
3.2H	0.374	0.374
3.4H	0.377	0.377
3.6H	0.379	0.379

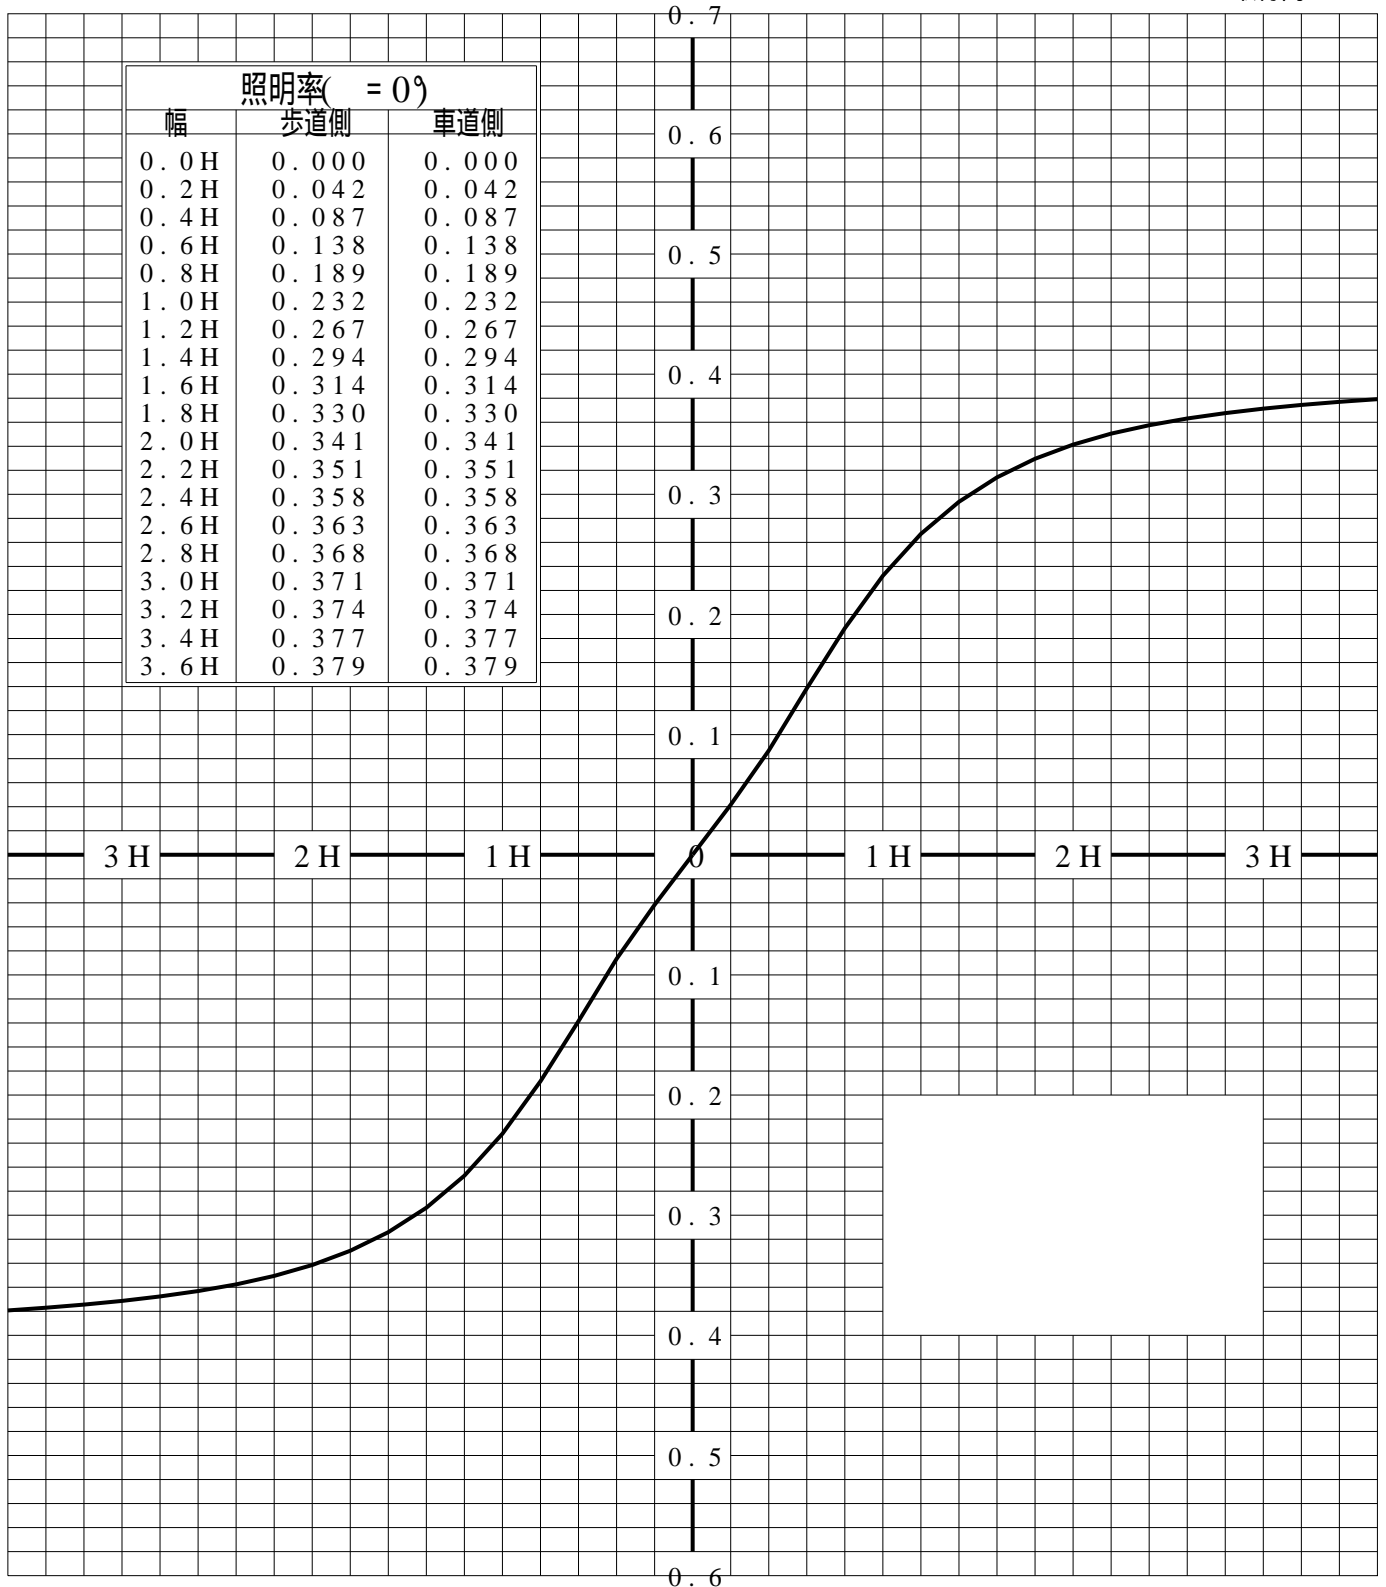

歩道側 ← ————— → 車道側