


屋外照明器具特性


品番(品名)	XYG2621R																		
光源	LED3000_85_1300 x1 1300.0 1m																		
管理番号	K0161461 (1) DB1																		
JIS C8131-1999 による配光形式																			
器具効率	99.9 %						直下光度			403.4 cd/1000lm									
上方光束	1.0%						最大光度			403.4 cd/1000lm									
下方光束	98.9%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	403	392	386	378	364	347	328	306	277	244	208	171	135	103	74	48	27	10	3
90°	403	392	385	373	355	336	312	286	255	219	178	148	132	111	82	48	22	10	4
180°	403	393	388	380	366	350	331	308	279	246	210	173	137	104	76	49	28	12	3
270°	403	392	385	373	355	336	312	286	255	219	178	148	132	111	82	48	22	10	4
I _{max} を含む鉛直面	403	392	386	378	364	347	328	306	277	244	208	171	135	103	74	48	27	10	3
配光曲線 cd/1000lm		150°						180°						150°					
		120°						90°						120°					
		60°						30°						60°					
		30°						0°						30°					
最大光度 I _{max} を含む の円錐面		800 cd						0°						30° = 0°の鉛直面					

正弦等光度曲線

品番(品名)	XYG2621R	光源	LED3000_85_1300 x1
管理番号	K0161461(1)DB1		

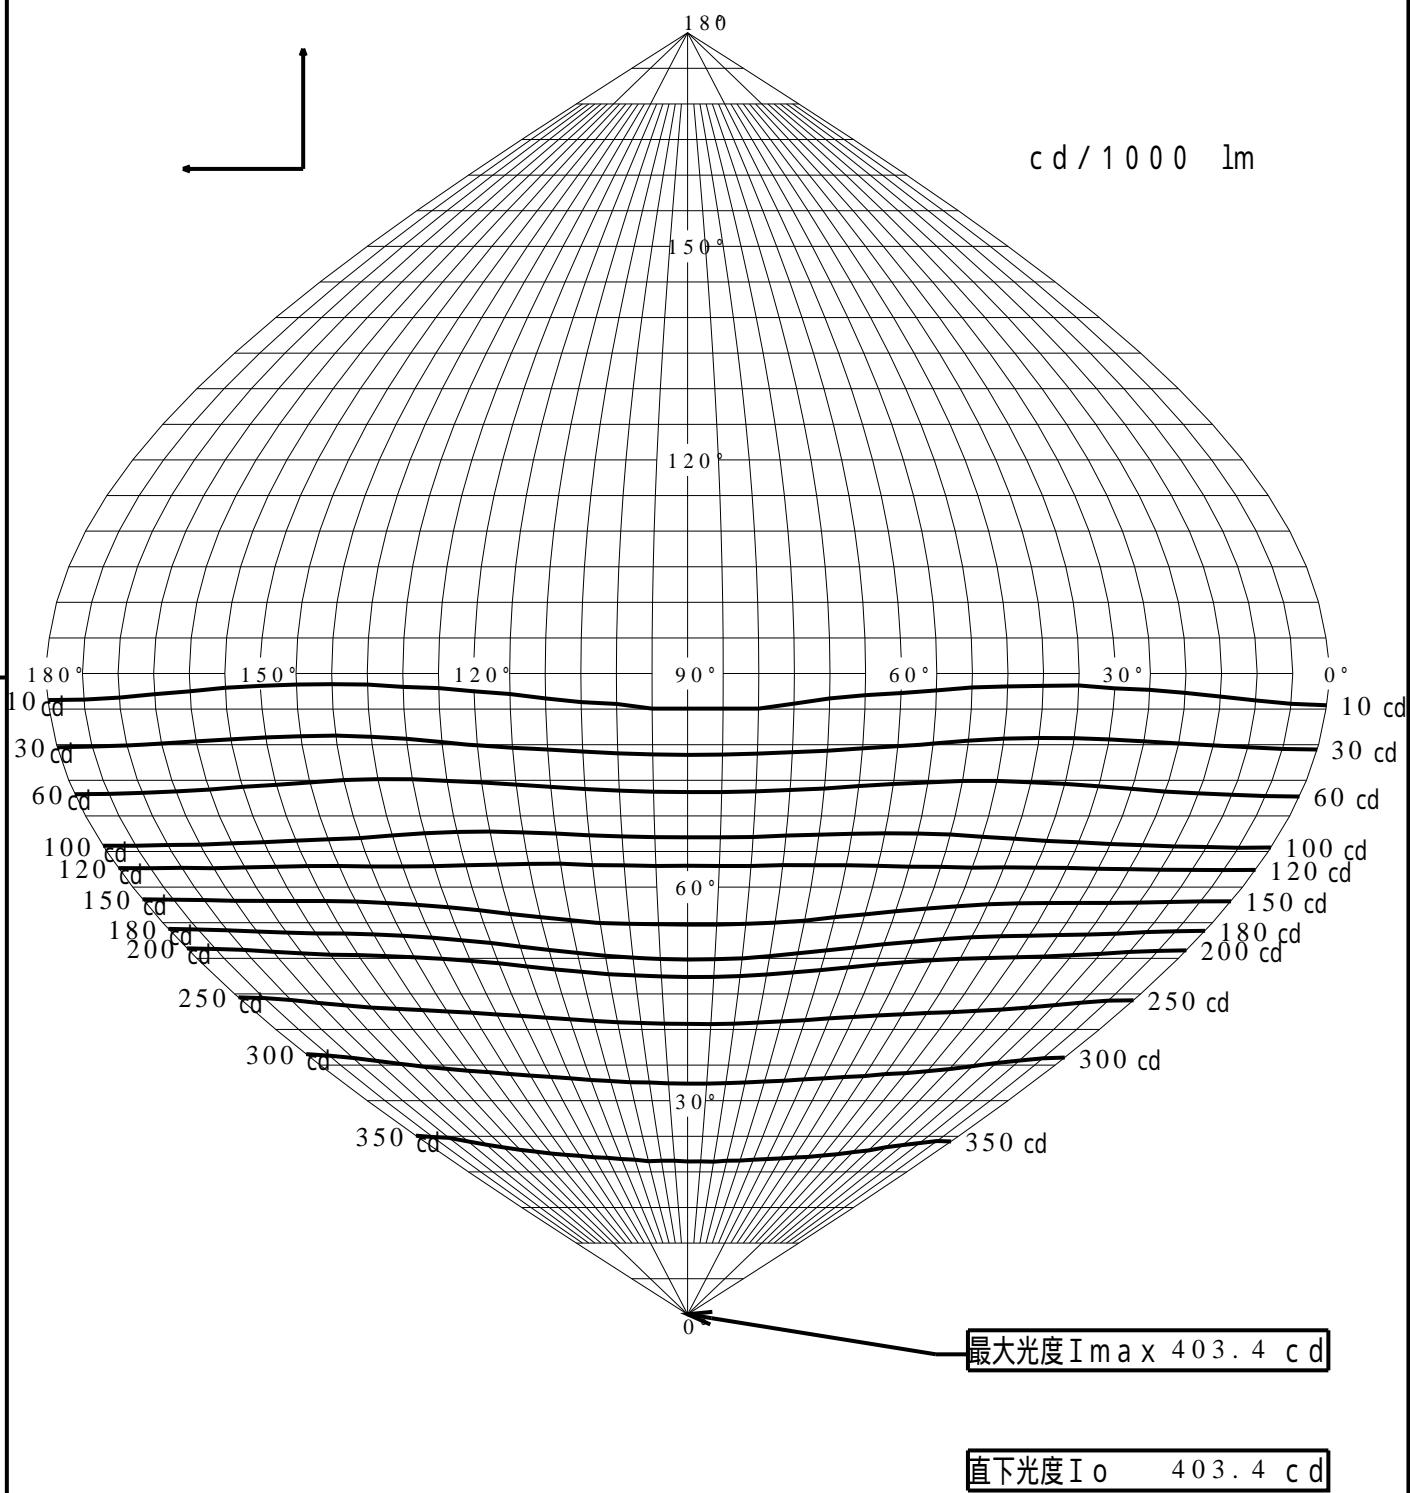

等照度曲線

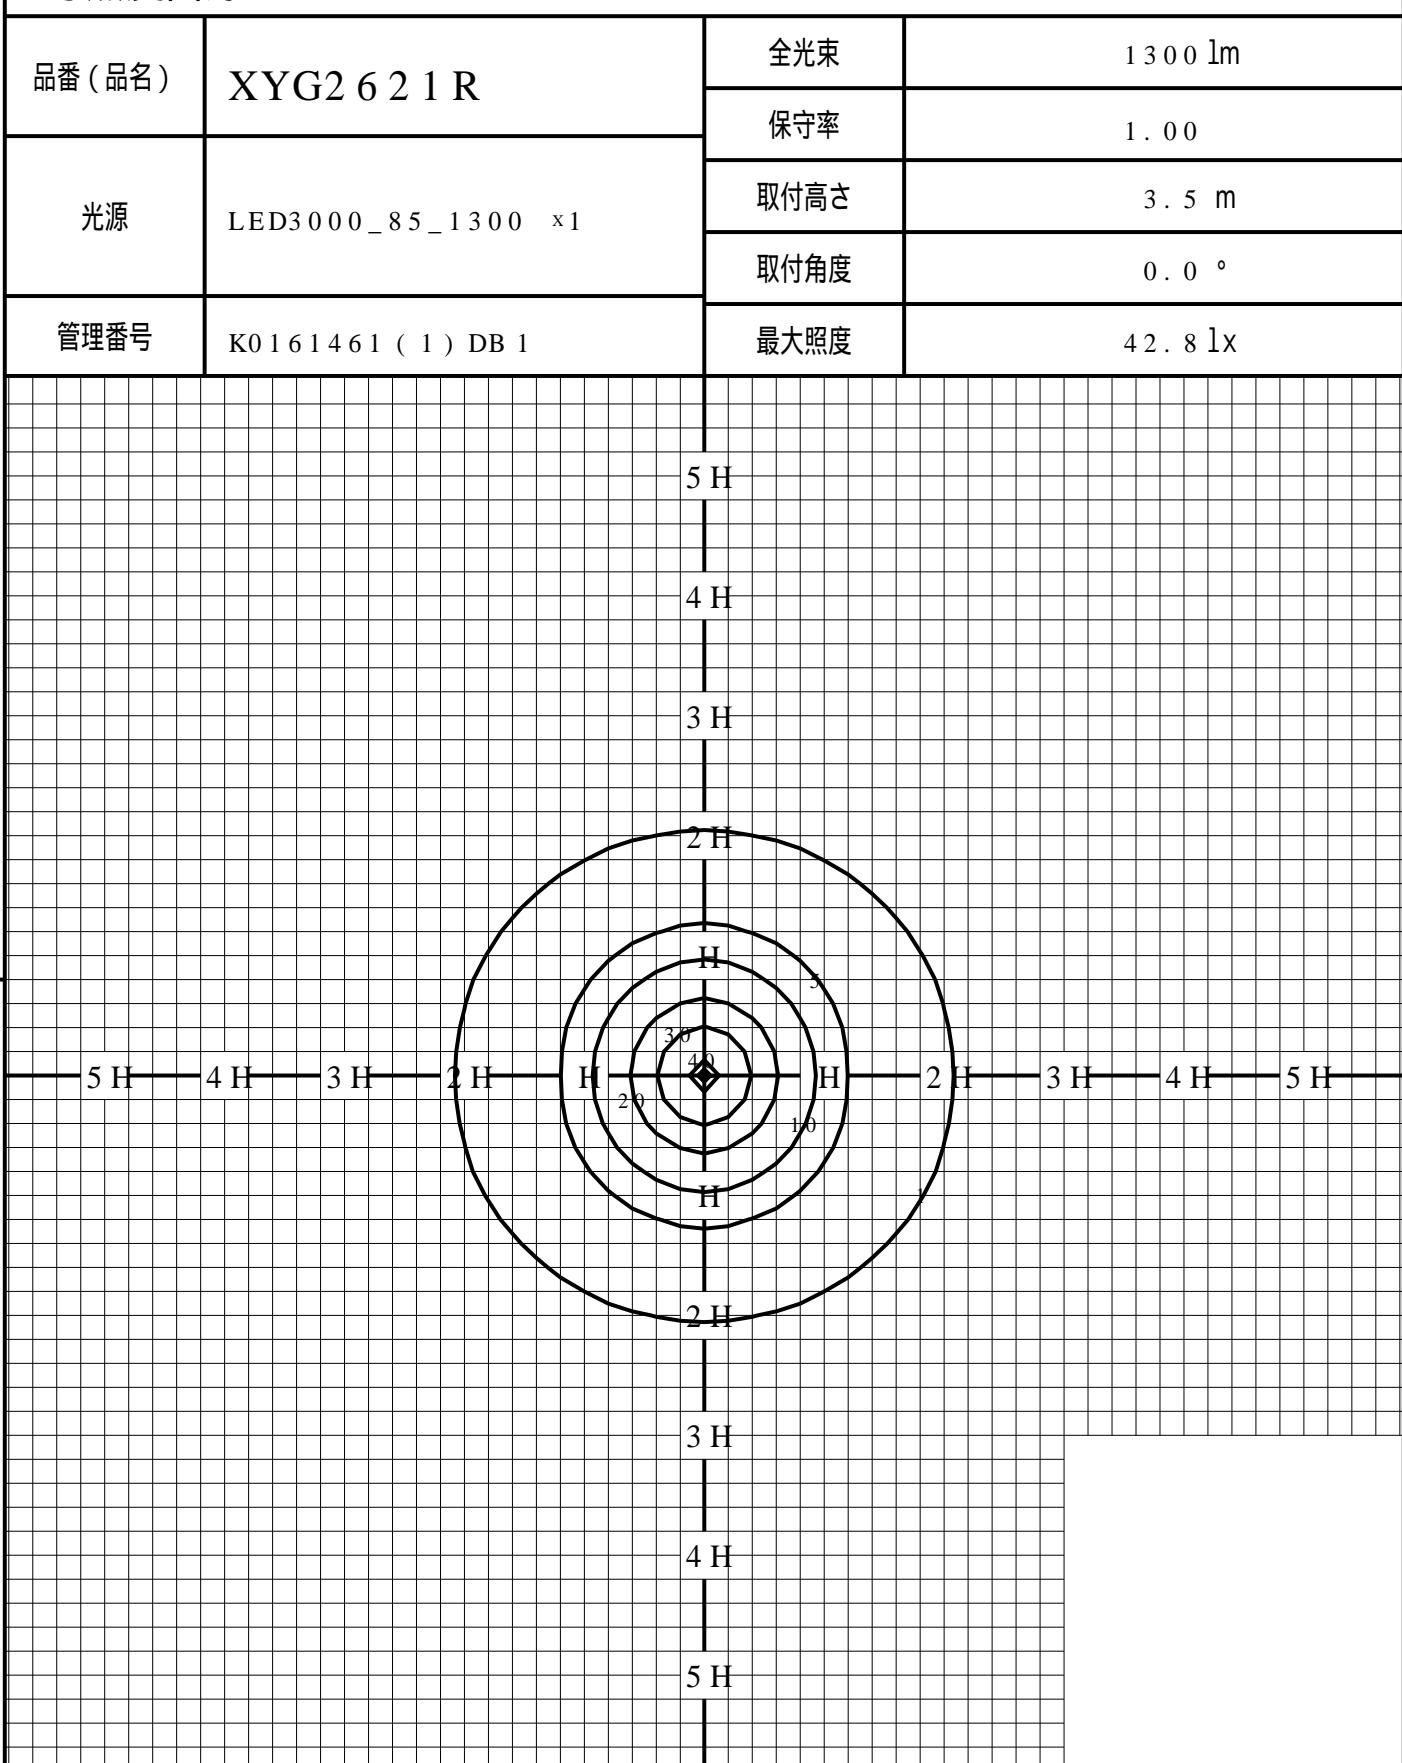

◆ 印は最大照度の位置を示す。

単位: lx

取付高さが異なる場合は照度の値に下表の補正係数を掛けて下さい。

H : 取付高さ

取付高さ	1 m	2 m	3 m	4 m	5 m	6 m	7 m	8 m	9 m	10 m
補正係数	12.250	3.062	1.361	0.765	0.490	0.340	0.250	0.191	0.151	0.122