


# 屋外照明器具特性

品番(品名)	NNY20235K																		
光源	LED5000_70_790 x1 790.0 lm																		
管理番号	K0167847(0)DB1																		
JISC8131-1999 による配光形式																			
器具効率 上方光束 下方光束	99.7%			直下光度			1226.6 cd/1000lm												
	0.0%			最大光度			2904.3 cd/1000lm												
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	1226	2046	2651	2904	2747	2081	1081	628	495	270	65	16	9	0	0	0	0	0	0
90°	1226	1107	861	665	545	455	353	216	84	17	11	8	3	0	0	0	0	0	0
180°	1226	715	532	395	203	40	19	11	7	6	0	0	0	0	0	0	0	0	0
270°	1226	1107	861	665	545	455	353	216	84	17	11	8	3	0	0	0	0	0	0
I <sub>max</sub> を含む鉛直面	1226	2046	2651	2904	2747	2081	1081	628	495	270	65	16	9	0	0	0	0	0	0

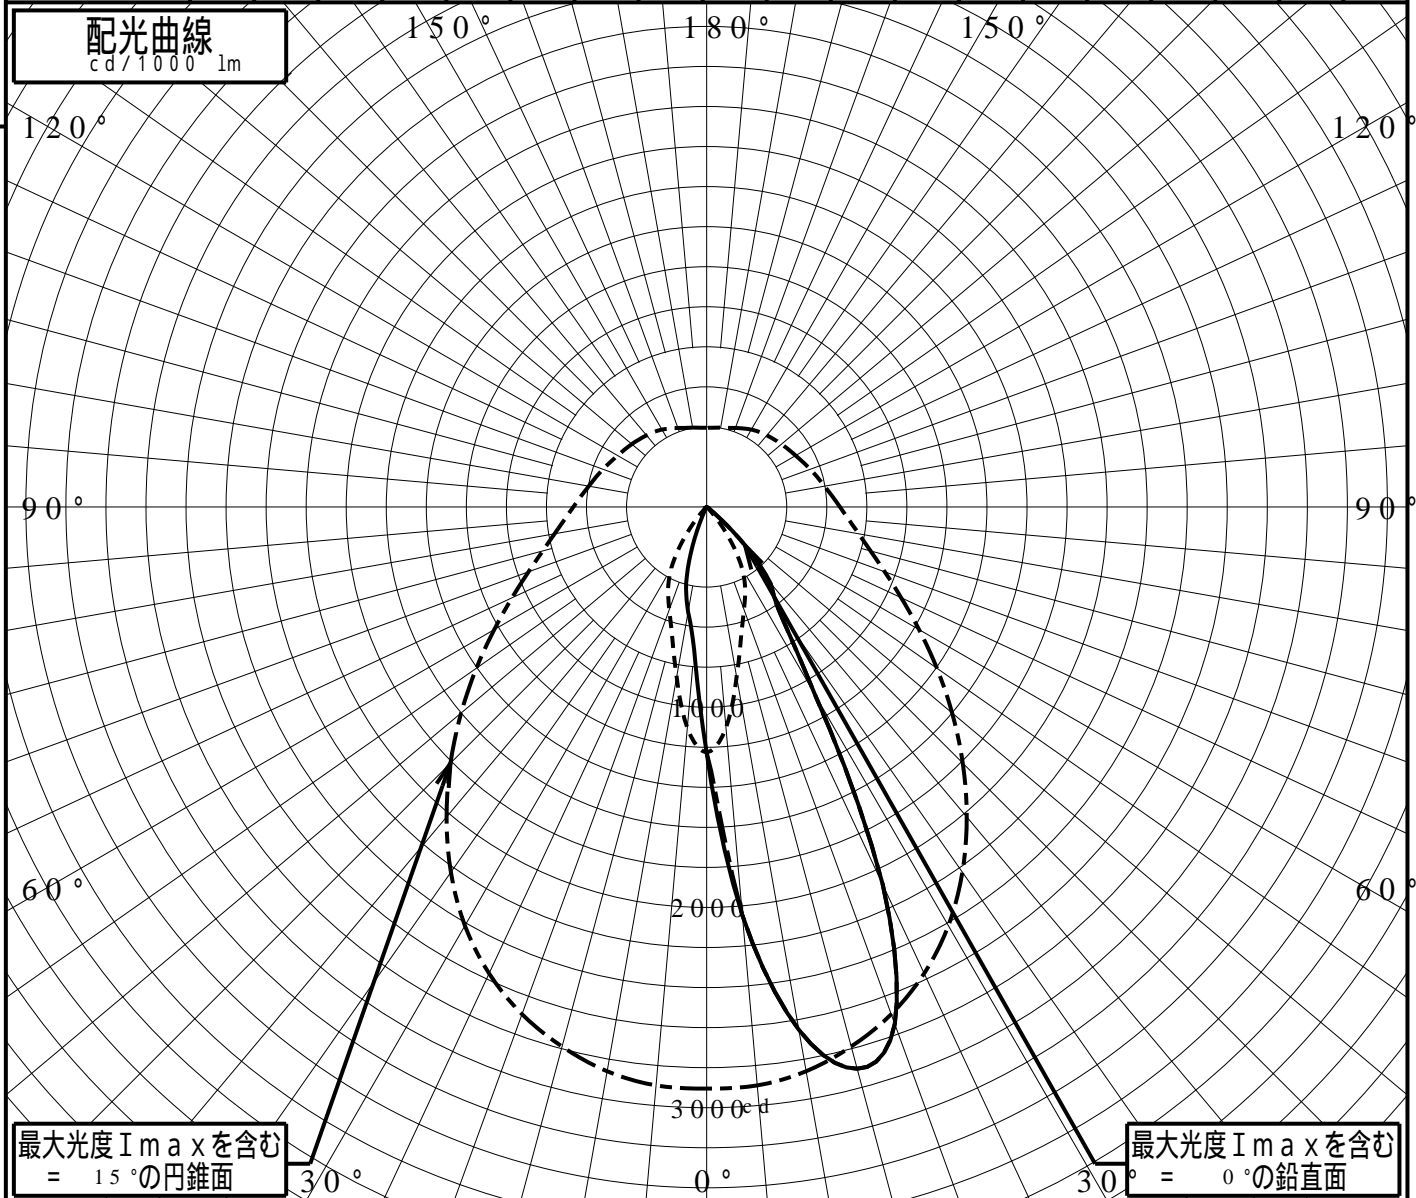

# 正弦等光度曲線

品番(品名)	NNY20235K	光源	LED5000_70_790 ×1
管理番号	K0167847(0)DB 1		

