


屋外照明器具特性

品番(品名)	XYSL5 1 UP4 1 K																		
光源	LED5000_70_785 x1 785.0 lm																		
管理番号	K0166466(1)DB1																		
JISC8131-1999 による配光形式																			
器具効率 上方光束 下方光束	100.0%			直下光度			372.4 cd/1000lm												
	0.0%			最大光度			704.4 cd/1000lm												
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	372	401	414	416	405	380	360	307	235	168	148	134	121	106	92	73	31	0	0
90°	372	373	378	378	373	372	399	509	547	431	451	453	437	347	82	5	0	0	0
180°	372	339	278	205	154	143	133	127	119	115	89	45	22	16	5	0	0	0	0
270°	372	373	378	378	373	372	399	509	547	431	451	453	437	347	82	5	0	0	0
I _{max} を含む鉛直面	372	381	389	395	401	403	404	448	685	537	450	456	437	344	101	6	0	0	0

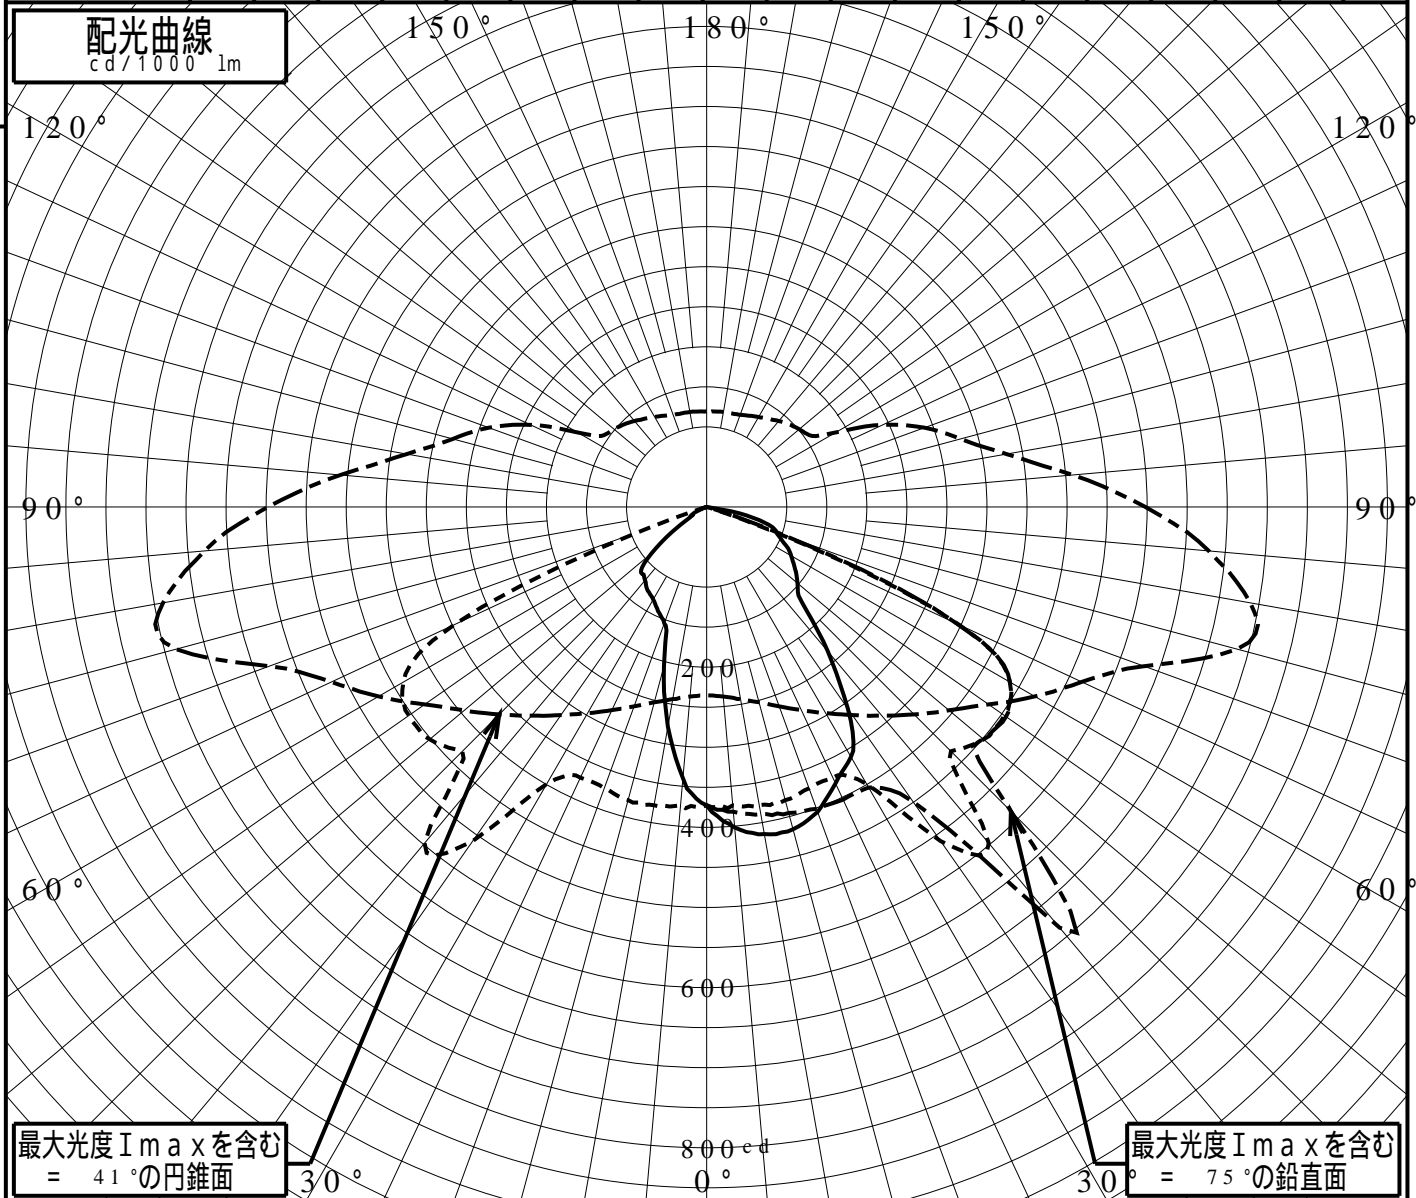


道路・トンネル照明率曲線

品番(品名)	XYSL51UP41K	光源	LED5000_70_785 ×1
管理番号	K0166466 (1)DB 1		

————— = 0.0°


H: 取付高さ(MOUNTING HEIGHT)

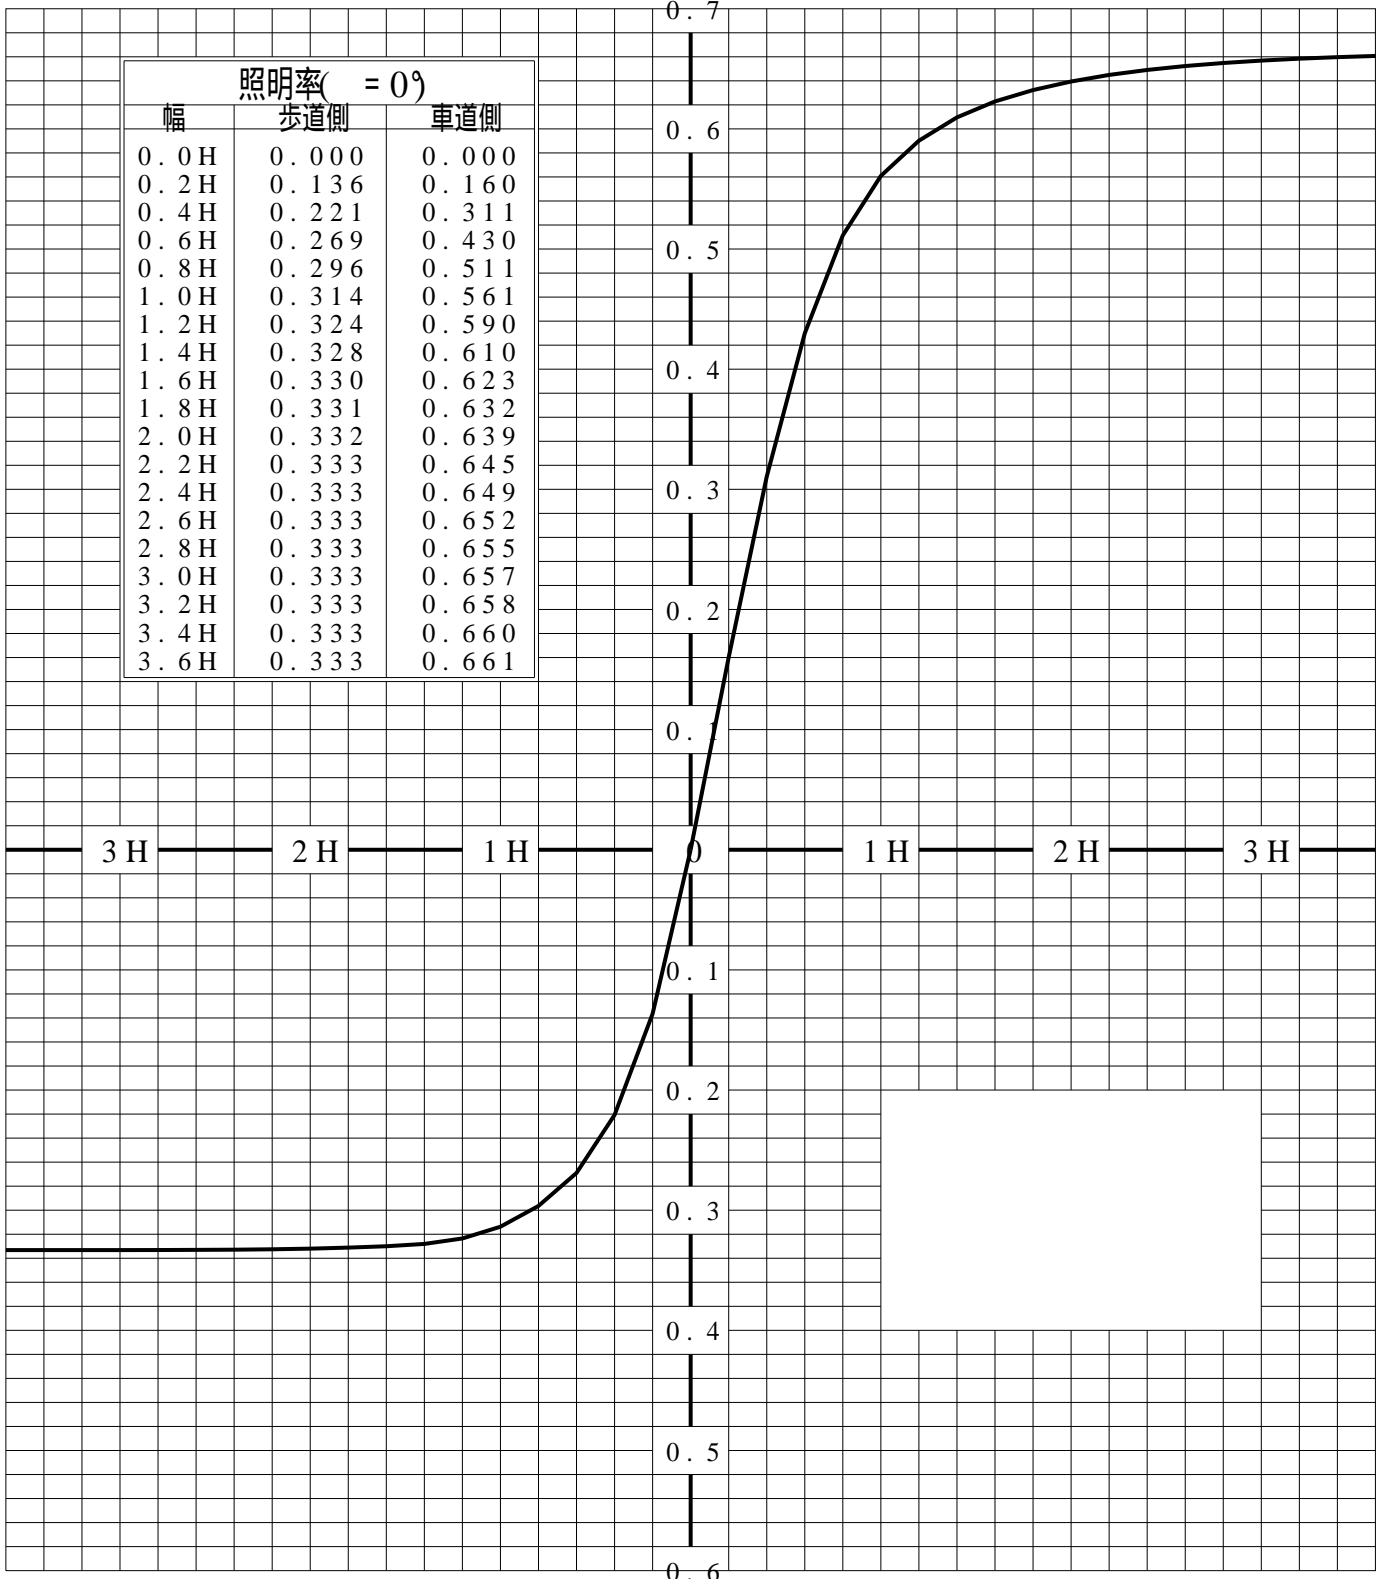

歩道側 ← → 車道側

正弦等光度曲線

品番(品名)	XYSL51UP41K	光源	LED5000_70_785 ×1
管理番号	K0166466(1)DB1		

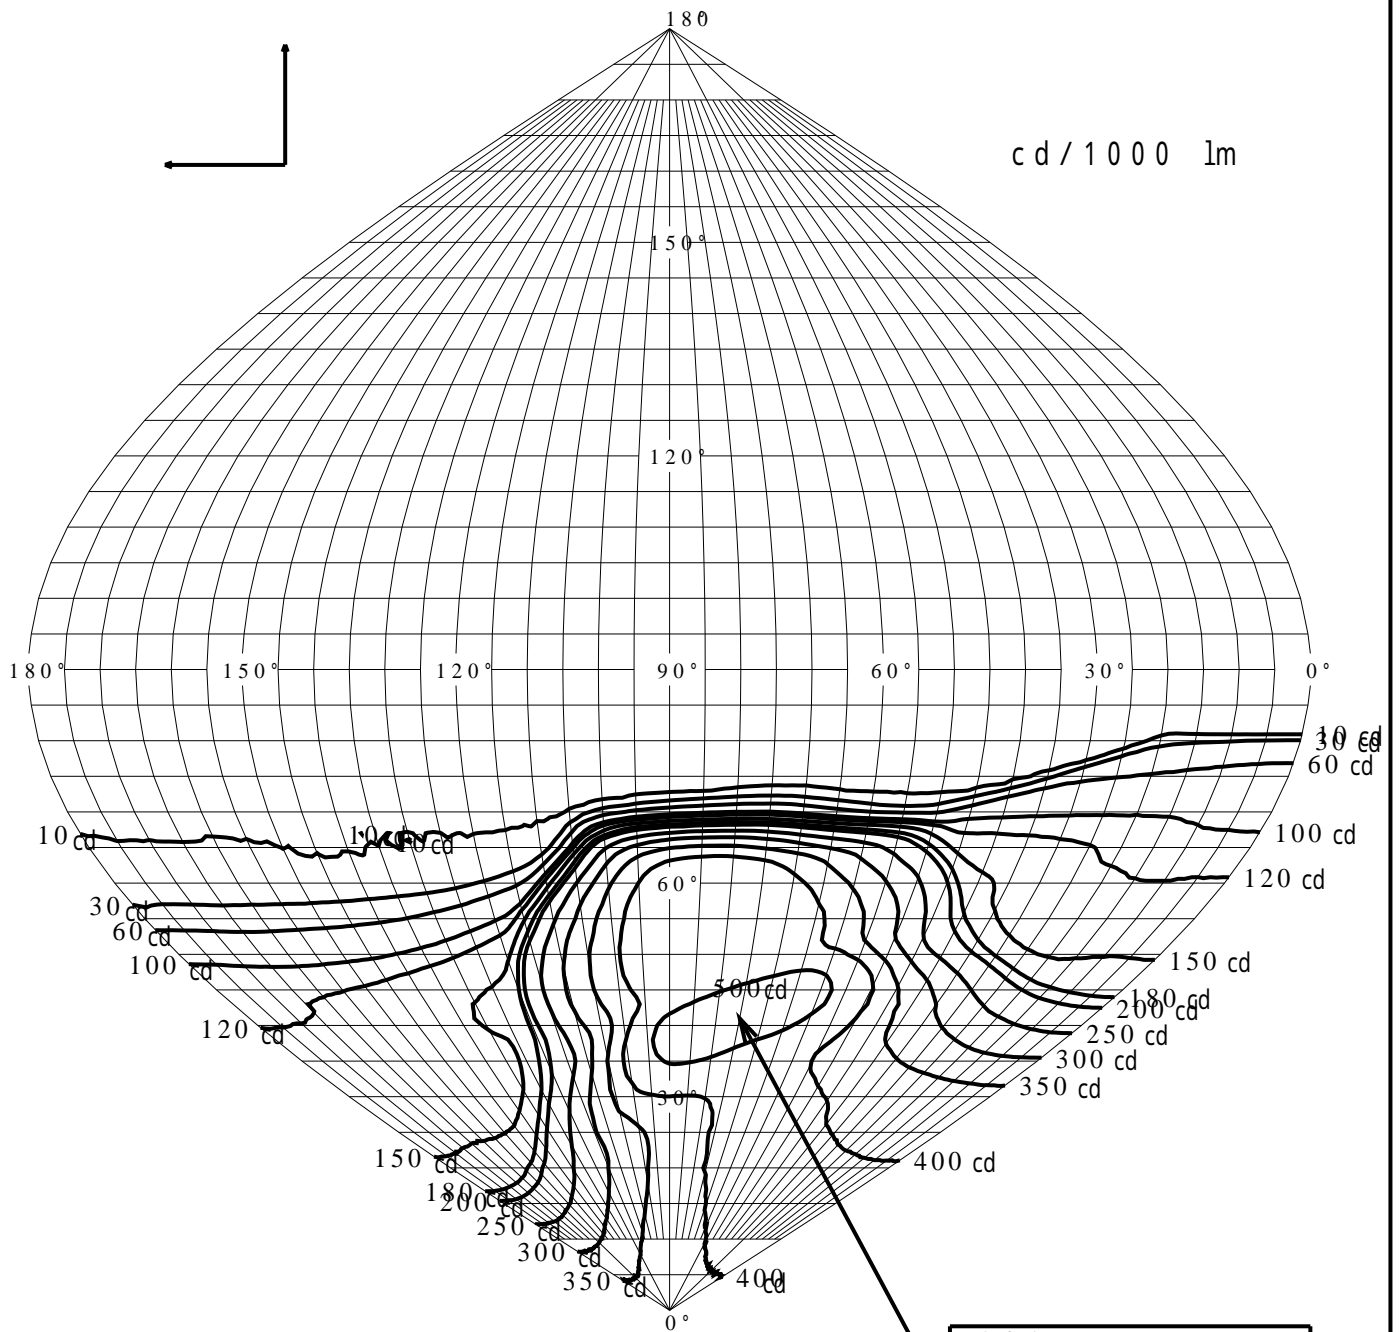

直下光度 I_o 372.4 cd