

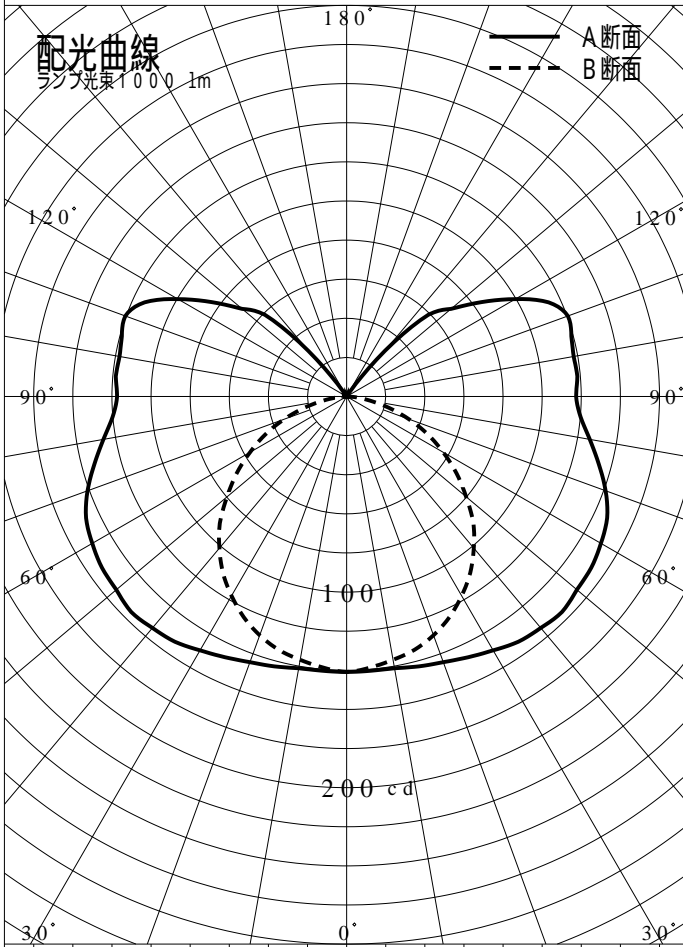


# 非常用照明器具特性

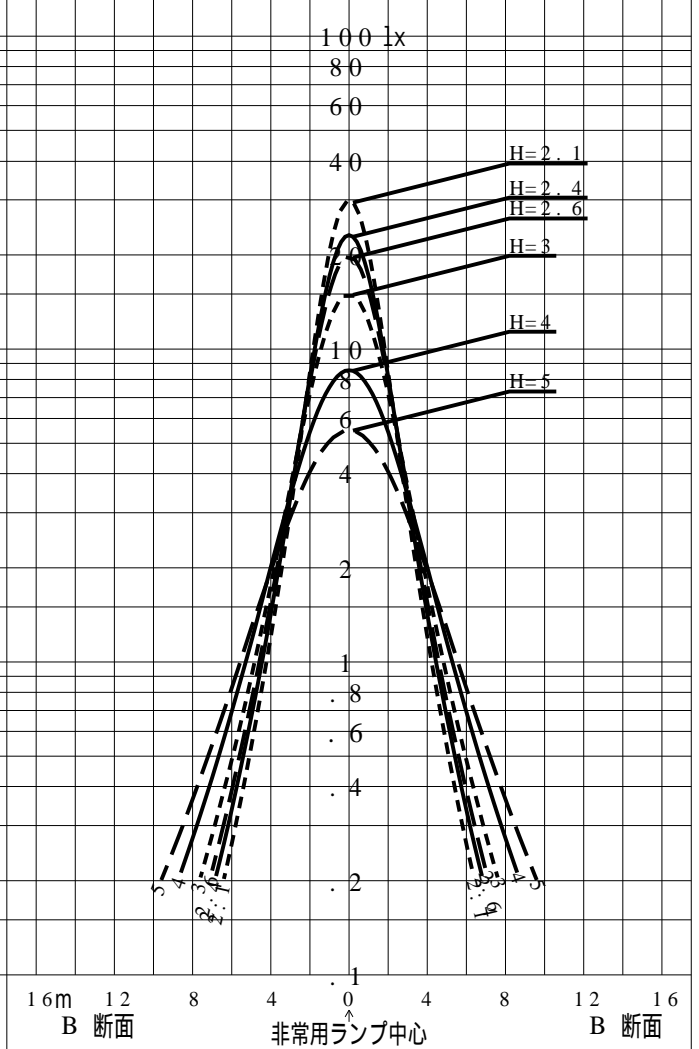

品番	FSG41098F		
名称	非常用蛍光灯電池内蔵型		
光源	FHF32EX-N-H(1100)		
管理番号	K0082726(8)DB1		
光束	1100mm × 1.00		
保守率	0.69		
適用品番	設計照度Eを得るための読取照度		
	E=2.0	E=1.0	E=0.5
FSG41098F	2.6	1.3	0.7
備考	非常点灯時の照度(30分後)		

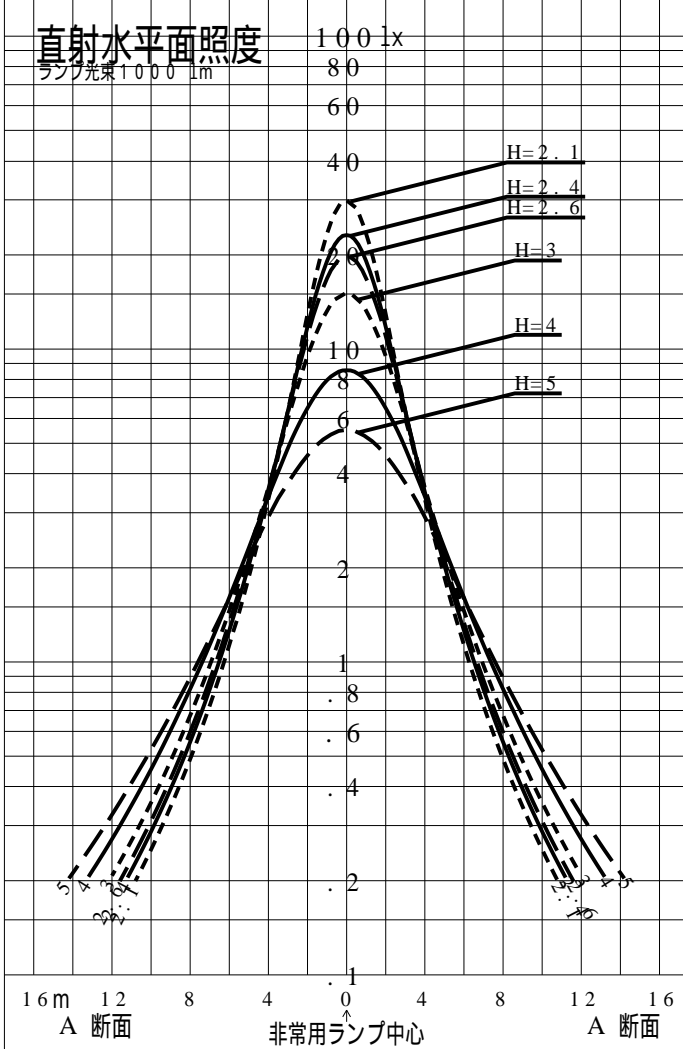

品番	FSG41098F				
名称					
光源	FHF32EX-N-H(1100)				
管理番号	K0082726(87)DB 1				
光束	1100.0 1m * 1.00			備考	非常点灯時の照度 (30分後)
保守率	0.69				

非常灯配置表

器具取付高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単体配置	A1	4.4	4.5	4.5	4.5	4.6	4.6	4.6	4.6	4.7	4.7	4.7	4.7	4.7	4.7	4.7	4.7
	B1	3.2	3.2	3.2	3.3	3.3	3.4	3.4	3.4	3.4	3.5	3.5	3.5	3.5	3.5	3.5	3.5
直線配置	A2	11.2	11.3	11.4	11.5	11.8	11.8	12.0	12.1	12.1	12.3	12.3	12.4	12.6	12.5	12.7	12.8
	B2	7.8	8.0	8.1	8.2	8.3	8.5	8.6	8.7	8.8	8.9	9.0	9.0	9.1	9.2	9.3	9.3
四角配置	A4	10.9	11.0	11.0	11.2	11.4	11.4	11.6	11.6	11.8	11.9	12.0	12.1	12.2	12.2	12.4	12.4
	B4	7.8	8.0	8.1	8.2	8.3	8.5	8.6	8.7	8.8	8.9	9.0	9.0	9.1	9.2	9.3	9.3
壁からの距離 (最大)	A0	3.0	3.0	3.1	3.0	3.0	3.0	3.0	2.9	2.9	2.9	2.8	2.7	2.6	2.8	2.7	2.5
	B0	1.5	1.6	1.7	1.6	1.7	1.7	1.6	1.8	1.6	1.8	1.6	1.7	1.6	1.7	1.5	1.6

器具取付高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0		
単体配置	A1	4.7	4.7	4.7	4.7	4.7	4.7	4.6	4.6	4.6	4.4	4.1	3.6	2.9	1.8		
	B1	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.4	3.3	3.0	2.7	2.2	1.3		
直線配置	A2	12.7	12.8	12.9	13.0	12.9	12.9	13.0	13.1	13.1	13.1	13.0	12.9	12.6	12.1		
	B2	9.4	9.5	9.5	9.6	9.6	9.7	9.7	9.8	9.8	9.9	9.9	9.8	9.6	9.3		
四角配置	A4	12.5	12.6	12.6	12.7	12.8	12.8	12.9	13.0	13.0	13.1	13.0	12.9	12.6	12.1		
	B4	9.4	9.5	9.5	9.6	9.6	9.7	9.7	9.8	9.8	9.9	9.9	9.8	9.6	9.3		
壁からの距離 (最大)	A0	2.3	2.5	2.2	2.4	1.9	2.1	1.5	1.7	1.9	1.2	1.0	1.5	1.5	1.4		
	B0	1.5	1.5	1.5	1.4	1.3	1.4	1.4	1.1	1.2	1.1	1.3	1.0	1.3	1.2		

器具取付高さ (m)																	
単体配置																	
直線配置																	
四角配置																	
壁からの距離 (最大)																	