


# 屋外照明器具特性

品番(品名)	S L W4 6 0 0 0																			
光源	LLD3020MLCB1 x 1 715.0 1m																			
管理番号	K0186204 (0) DR 1																			
JIS C8131-1999 による配光形式	CUT-OFF																			
器具効率	4.1%				直下光度				0.0 cd/1000lm											
上方光束	0.8%				最大光度				8.2 cd/1000lm											
下方光束	3.4%																			
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	
= 0° 鉛直面	0	0	0	0	0	0	2	3	4	5	6	7	8	8	8	7	5	4	3	
90°	0	0	0	0	0	0	2	3	4	5	6	7	8	8	8	7	5	4	3	
180°	0	0	0	0	0	0	2	3	4	5	6	7	8	8	8	7	5	4	3	
270°	0	0	0	0	0	0	2	3	4	5	6	7	8	8	8	7	5	4	3	
I <sub>max</sub> を含む鉛直面	0	0	0	0	0	0	2	3	4	5	6	7	8	8	8	7	5	4	3	
配光曲線 cd/1000lm					150°				180°				150°				120°			
最大光度 I <sub>max</sub> を含む = 61°の円錐面					30°				20 cd 0°				30°				最大光度 I <sub>max</sub> を含む = 0°の鉛直面			

# 等照度曲線

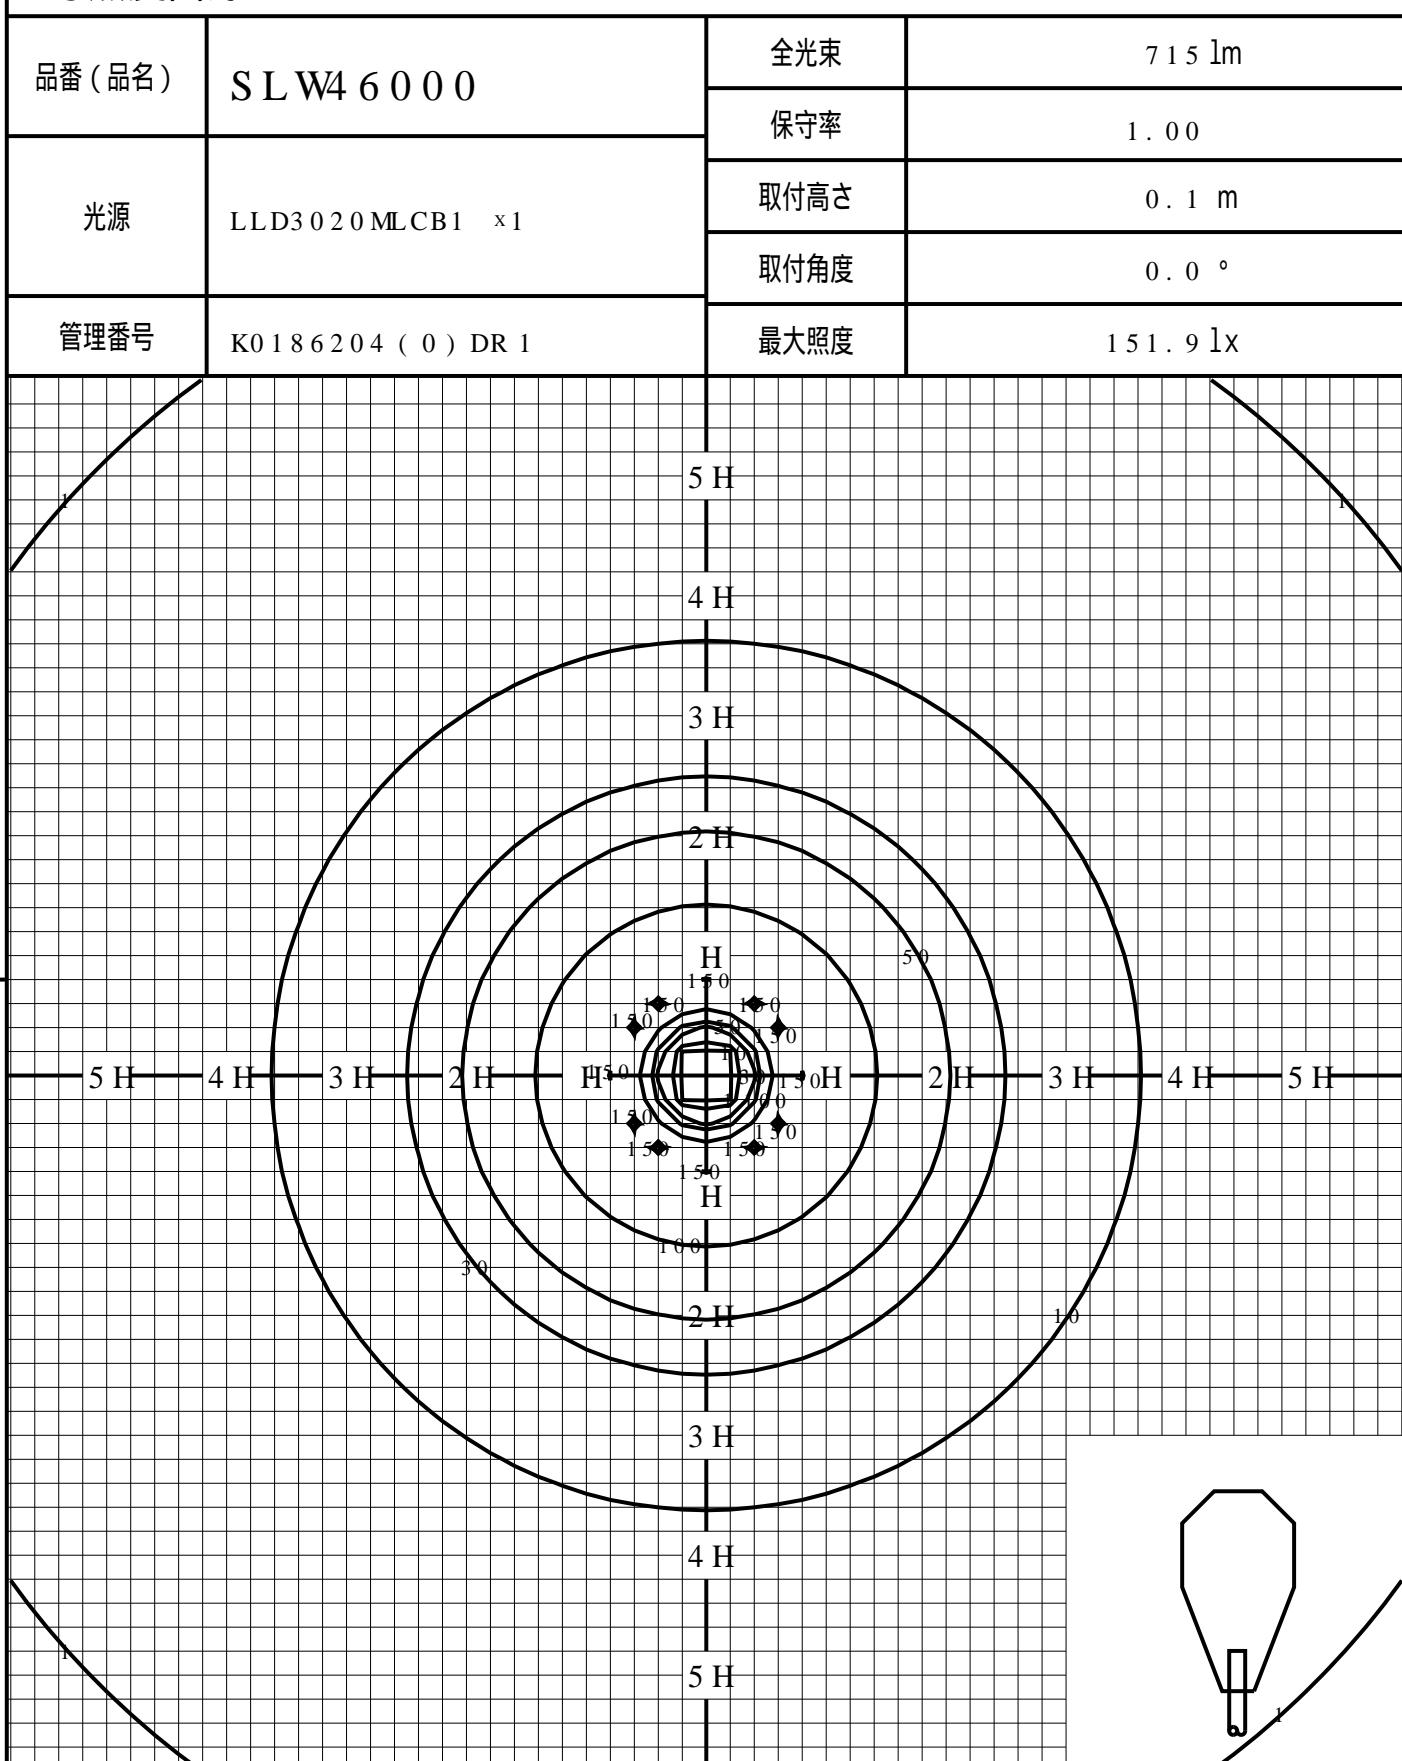

◆ 印は最大照度の位置を示す。

単位: lx

取付高さが異なる場合は照度の値に下表の補正係数を掛けて下さい。

H : 取付高さ

取付高さ	1 m	2 m	3 m	4 m	5 m	6 m	7 m	8 m	9 m	10 m
補正係数	0.010	0.002	0.001	0.000	0.000	0.000	0.000	0.000	0.000	0.000